

Master Turnitin

Harmonic Distortion Contribution for the Transmission Loss Allocation in Deregulated Energy Market: A New Scheme for I...

 10 desember 2025

 UMI 2025

 Universitas Muslim Indonesia

Document Details

Submission ID

trn:oid::1:3440258825

Submission Date

Dec 10, 2025, 1:01 PM GMT+8

Download Date

Dec 10, 2025, 1:05 PM GMT+8

File Name

Journal_JEET_2105.pdf

File Size

386.9 KB

7 Pages

4,169 Words

20,658 Characters

8% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

Filtered from the Report

- Bibliography
- Quoted Text
- Cited Text
- Small Matches (less than 20 words)

Exclusions

- 16 Excluded Sources

Match Groups

-  **8 Not Cited or Quoted 8%**
Matches with neither in-text citation nor quotation marks
-  **0 Missing Quotations 0%**
Matches that are still very similar to source material
-  **0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
-  **0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 6%  Internet sources
- 5%  Publications
- 4%  Submitted works (Student Papers)

Integrity Flags

0 Integrity Flags for Review

No suspicious text manipulations found.

Our system's algorithms look deeply at a document for any inconsistencies that would set it apart from a normal submission. If we notice something strange, we flag it for you to review.

A Flag is not necessarily an indicator of a problem. However, we'd recommend you focus your attention there for further review.

Match Groups

- 8 Not Cited or Quoted 8%**
Matches with neither in-text citation nor quotation marks
- 0 Missing Quotations 0%**
Matches that are still very similar to source material
- 0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
- 0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 6% Internet sources
- 5% Publications
- 4% Submitted works (Student Papers)

Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Internet	noexperienecessarybook.com	2%
2	Internet	malrep.uum.edu.my	2%
3	Publication	Kim, Kisuk, Chong Suk Song, Gilsung Byeon, Hosung Jung, Hyungchul Kim, and Gil...	<1%
4	Internet	dalila.fke.utm.my	<1%
5	Publication	Syarifuddin Nojeng, Mohammad Yusri Hassan, Dalila Mat Said, Md. Pauzi Abdulla...	<1%
6	Student papers	Jeju National University	<1%
7	Internet	eprints.uthm.edu.my	<1%
8	Internet	repository.up.ac.za	<1%

Harmonic Distortion Contribution for the Transmission Loss Allocation in Deregulated Energy Market: A New Scheme for Industry Consumer

Syarifuddin Nojeng*, Mohammad Yusri Hassan[†], Dalila Mat Said*,
Md.Pauzi Abdullah* and Faridah Hussin*

Abstract – The industry has rapidly growth and energy supply technology advanced are become main factor which to contribute of the harmonic losses. This problem is one aspect that may affect the capability of the transmission line and also to the efficiency of electricity. This paper proposes a new scheme to allocate the cost pertaining to transmission loss due to harmonics. The proposed method, called as Generalized Harmonic Distribution Factor, uses the principle of proportional sharing method to allocate the losses among the transmission users especially for industry consumers. The IEEE 14- and 30 bus test system is used to compare the proposed method with existing method. The results showed that the proposed method provided a scheme better in allocating the cost of transmission loss, which could encourage the users to minimize the losses.

Keywords: Transmission losses, Harmonic distortion, Industry consumer, Deregulated energy market.

1. Introduction

Recently, the issue of harmonic losses is always disputable in the deregulated power system. The industry rapidly growth and energy supply technology advanced are main contribute for the harmonic distortion [1]. Many industry consumers that use electronic devices, including the use of reactive power compensation devices such as static compensator variables and UPS, are the main factors on the emergence of harmonic pollution on the distribution network [2]. For instance, Korean will be development of the infrastructure battery charging for electric vehicles which can be to contribute of the harmonic distortion [3]. The utility companies usually install the mitigation equipment to maintain the quality of power supplied. Once this equipment is installed, its cost must be recovered from the consumers who have caused the power quality (PQ) problem, i.e. harmonic distortion [4]. The consumer will pay according to the amount of stress (usage) that their equipment causes onto the mitigation equipment [5].

The IEEE Standard 519-1992 [6] has become a standard of PQ associated with the harmonic distortion caused by the source or load. This standard establishes a maximum limit of 5% of the Total Harmonic Distortion (THD) factor for the current and voltage [7]. The THD indicates the amount of content of the harmonic components either in

current or voltage waveform.

Many approximate models and algorithms have been introduced in the literature that tried as accurate as possible to identify and allocate the cost of losses to each participant in the transmission network. In several papers have been exploited of the harmonic focused on the loss allocation due to the harmonic distortion. Power quality problem is one aspect that may affect the ability of the facility within the power system and also the efficiency of electricity distribution from generation sources to the consumer [8].

The development of loss allocate scheme for harmonic distortion is to determine what harmonic loss should be accurate in PCC for all ICs. The system operator concentrates on solving the technical problems of finding proper incentive signals for transmission owner, while the load effort to encourage harmonic reduction.

This paper proposes a new method to determine of the harmonic contribute for transmission losses allocate. After the introduction in section I, the problem description an overview of transmission loss allocation in presented in section II. Section III explains and formulates the proposed method. A test case based on the 14-bus system is provided in Section IV. Results and discussions are provided in Section V. Section VI presents concluding remarks.

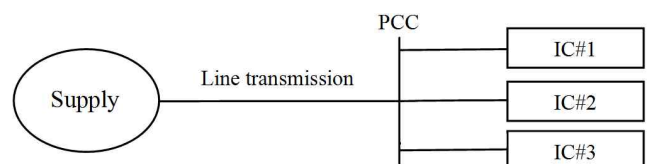


Fig. 1. Single line diagram with several industry consumers (IC) connected to point of common coupling (PCC).

[†] Corresponding Author: Centre of Electrical Energy System (CEES) Dept. of Electrical Engineering, Universiti Teknologi Malaysia, UTM, Malaysia. (yusrih@fke.utm.my)

* Centre of Electrical Energy System (CEES) Dept. of Electrical Engineering, Universiti Teknologi Malaysia, UTM, Malaysia. (syarifuddinnojeng@yahoo.co.id)

Received: October 2, 2013; Accepted: August 18, 2014

2. Problem Description

Total Harmonic Distortion (THD) is an index that commonly used to determine the level of wave distortion. This parameter is power quality level on an equipment or system. The index of THD, which is shown in Eqs. (5-6), is the ratio of the number of rms value of each individual harmonic waves and fundamental wave, and is used to indicate the level of harmonic generation. There are two types of THD is namely; voltage and current THD. Basically, the electric power supply must provide good power quality like constant voltage magnitude and frequency. Meanwhile, by using electronic devices and non-linear load non-sinusoidal, which can result in poor power quality. It can cause of electrical disturbances like transients, sags, swells, harmonics, and even disruption in power supply [4]. And also, can be to increase of losses in line due harmonic component for line flow.

Generally, transmission losses commonly contribute between 3-5% of the total power losses in network [9]. Therefore, it is a major problem in the efficiency of generation cost. Several methods have been developed and introduced in the literature to identify the losses caused by each component in the electricity market. In the context of loss, the determination of transmission loss allocate (TLA) should be as accurate as possible to all users. A widely used approach in TLA is the proportional method Pro-rata method is a technique to solve the problem of the TLA [10], which uses the principle of proportional sharing (PSP) [11]. The approach is based on the concept of the exact power that has been developed through the analysis of the circuit [12]. While, based on the load flow analysis, the method proposed based on Z-bus matrix of the network [13]. Then, to obtain accurately, the author in [14] proposed an approach using neural networks and other methods using the modified nodal equations to identify the actual power loss allocation for the generator and the load [15]. Meanwhile, [16] proposed a loss allocation method based on circuit theory. A new method was verified by [17] for allocating the user's loss contribution in each branch, called as Equivalent Bilateral Exchange (EBE). The EBE method assumes that the users of the network have their own contribution on the system based on the contribution of currents power.

Finally, a satisfactory TLA scheme should have the following features; charging the user for the actual usage of the grid; providing to new scheme for consumer and power plants about scheme best that can relieve transmission congestion and losses; predictable; simple and easy to implement and can ensure recovery of the total transmission revenue [18].

3. Proposed Method

In the proposed method, the system loss was calculated by

using load flow analysis. By defining the line impedance of system as:

$$Z_{ij} = R_{ij} + jX_{ij} \quad (1)$$

and the power equation:

$$P_i = \sum_{n=1}^N |Y_{in} V_i V_n| \cos(\theta_{in} + \delta_n - \theta_i) \quad (2)$$

$$Q_i = -\sum_{n=1}^N |Y_{in} V_i V_n| \sin(\theta_{in} + \delta_n - \theta_i)$$

thus, the transmission losses from bus-i to bus-j can be expressed as:

$$MW_{lossij} = S_{ij} + S_{ji} \quad (3)$$

where:

$$S_{ij} = V_i \cdot I_{ij}^* \quad (4)$$

and,

$$S_{ji} = V_j \cdot I_{ji}^* \quad (5)$$

Where:

S_{ij} = Power flow from bus i to bus j

S_{ji} = Power flow from bus j to bus i

Basically, the level of power quality due to harmonic load can be divided into two types; load without distortion, where the load does not contain distortions, and the load with distortion. The utility total harmonic distortion factor for current (THDI_U) is defined as:

$$THDI_U = \sqrt{\frac{\sum_{h=N_A+1}^{\infty} I_h^2}{I_1^2}} \quad (6)$$

The utility total harmonic distortion factor for voltage (THDV_U) is defined as:

$$THDV_U = \sqrt{\frac{\sum_{h=N_A+1}^{\infty} V_h^2}{V_1^2}} \quad (7)$$

Meanwhile, the total transmission losses with harmonic component can be written as:

$$MW_{loss}^h = MW_{loss} (\sqrt{1 + THD^2}) \quad (8)$$

By defined the contribution of harmonic for each load j at Demand (D) as $MW_{loss,D}^k$, therefore we obtain:

$$MW_{loss,D}^h = \sum_{j=1}^N C_j^h \cdot MW_{loss,Dj}^h \quad (9)$$

Where;

$$\sum_{j=1}^N C_j^h = C_1^h + C_2^h + C_3^h + \dots + C_n^h = 1 \quad (10)$$

And,

$$C_j^h = \frac{THD_{Dj}}{\sum THD_{Dj}} \quad (11)$$

Where:

C_j^h = harmonic share load-j of the total harmonic in load.

Let be the harmonic factor for each Demand (D) as follows;

$$\sum_{j=1}^N f_{THD,Dj} = f_{THD,D1} + f_{THD,D2} + \dots + f_{THD,DN} \quad (12)$$

Let, we define $f_{THD,DN}$ as harmonic component due load-N, can be expressed as follows :

$$MW_{loss,D}^h = P_{loss} - F_{THD,D} \cdot P_{loss} = P_{loss} (1 - F_{THD,D}) \quad (13)$$

We defined the total harmonic loss component as ;

$$MW_{loss,D}^h = P_{loss} - \left[\frac{1}{\sum_{j=1}^N f_{THD,Dj}} \right] P_{loss} \quad (14)$$

Can be re-writing as:

$$f_{THD,DN} = \left(\sqrt{1 + THD_{DN}^2} \right) \quad (15)$$

and

$$MW_{loss,D}^h = F_{THD,D} \cdot P_{loss} \quad (16)$$

Therefore, the general formulation of transmission loss allocation with consideration of total harmonic distortion (THD) factor for the users can be written as:

$$L_{Dj}^h = [f_{TLA}] + C_j^h \cdot MW_{loss,D}^h \quad j \in NB; \quad (17)$$

Where:

L_{Dj}^h as transmission loss allocate with harmonic contain for each load j. And $C_j^h \cdot MW_{loss,D}^h$ as the harmonic loss contribute due load -j or demand-D.

While, f_{TLA} is transmission loss based on TLA methods, for example:

1. Pro-rata [17]:

$$f_{TLA} = \frac{L}{2} \cdot \left[\frac{P_{Dj}}{P_D} \right] \quad (18)$$

Therefore, using Eqs. (17) and (18), we obtained:

$$L_{Dj} = \frac{L_R}{2} \left[\frac{P_{Dj}}{P_D} \right] + \left[\frac{THD_{Dj}}{\sum_{j=1}^N THD_{Dj}} \cdot (MW_{loss,D}^h) \right] \quad (19)$$

2. Incremental Transmission Losses (ITL)

$$f_{TLA} = P_{Dj} \cdot \frac{\partial L}{\partial P_{Dj}} \quad (20)$$

3. Z-Bus Method [14]:

Similarly, using Eq. (17) for Z bus method, we obtained:

$$f_{TLA} = \Re \left\{ I_k^* \left(\sum_{j=1}^N R_{kj} \cdot I_j \right) \right\} \quad (21)$$

The component of function in (17) is called as “Generalized Harmonic Distribution Factor (GHDF)” where f_{TLA} = function of the Transmission Loss Allocation method caused by line parameter R, and $C_j^h \cdot MW_{loss,D}^h$ is the contribution of losses for each load due harmonic [21].

According to *IEEE std 1459-2000*, the established maximum limit of THD would be 5% [6]. This means that each load should pay an additional charge if THD in load more than 5% (for instance: industry consumer).

$$TLA_{load} = TLA_{THD:5\%} \quad (22)$$

where:

TLA_{load} = Transmission loss allocated to load.

$TLA_{THD5\%}$ = Transmission loss allocated to demand with THD load is 5%.

then:

$$MW_{loss}^h = MW_{loss} \left[\sqrt{1 + THD_{5\%}^2} \right] \quad (23)$$

By setting the THD5% as THD_{ref} which is based on *IEEE std 1459-2000*, then the net total harmonic distortion for the load with 5% THD will be equal to zero or can be written mathematically as:

Harmonic Distortion Contribution for the Transmission Loss Allocation in Deregulated Energy Market: A New Scheme for Industry Consumer

$$\Delta THD = THD_{ref} - THD_{5\%} = 0 \quad (24)$$

Therefore Eq. (24) substitute to (8), the total transmission losses with harmonic component in Eq. (8) can be obtain as follows:

$$MW_{loss}^h = MW_{loss} \quad (25)$$

Meanwhile, if the THD load is not equal to THD_{ref} then the total harmonic distortion THD can be written as:

$$\Delta THD = THD_{ref} - THD_{load} \quad (26)$$

Hence,

$$MW_{loss,Dj}^h = MW_{loss,Dj} \left[\sqrt{(1 + \Delta THD^2)} \right] \quad (27)$$

4. Case Study and Discussion

The proposed method was tested on the IEEE14-bus system. The proposed method was compared with the original Z method with and without harmonic by transmission utilities as described in Section 4, to investigate its ability to provide a better economic signal to transmission system users. In this case study, the proposed method was tested on the IEEE 14-bus systems and the IEEE 30-bus systems as shown in Figs. 2 and 3.

By using three methods: each Pro-average method, ITL method and Z method bus then Z method gives better results. The third method results are shown in Table 1. For example on bus 1, two methods of pro rata and ITL provides value 0 while the bus Z method losses are by 7 MW. Similarly, on the bus 8. Then based on Table 2, the

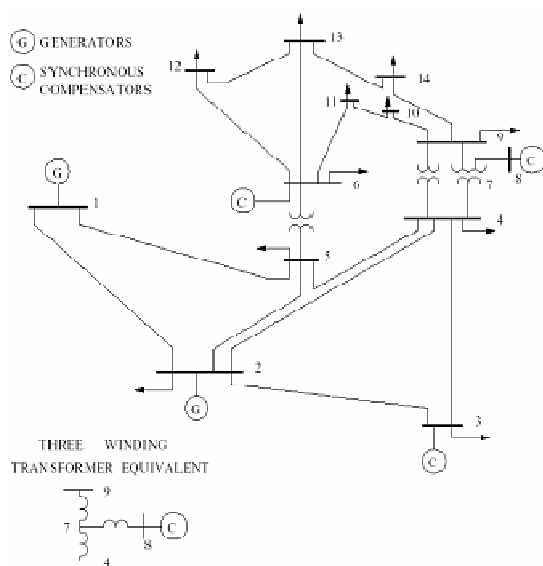


Fig. 2. The IEEE 14 bus test system

Table 1. Compare of transmission loss allocation without harmonic distortion using the IEEE-14 bus systems.

No. bus	Demand		Loss Allocation (MW)		
	MW	MVA _r	Pro rata	ITL	Z bus
1	0.00	0.00	0.000	0.000	7.094
2	21.70	12.70	1.123	0.510	0.090
3	94.20	19.00	4.874	5.520	3.087
4	47.80	-3.90	2.473	2.490	1.003
5	7.60	1.60	0.393	0.290	0.101
6	11.20	7.50	0.580	0.440	0.158
7	0.00	0.00	0.000	0.000	0.000
8	0.00	0.00	0.000	0.002	0.010
9	29.50	16.50	1.526	1.520	0.610
10	9.00	5.80	0.466	0.510	0.205
11	3.50	1.80	0.181	0.150	0.069
12	6.10	1.60	0.316	0.270	0.132
13	13.50	5.80	0.699	0.690	0.339
14	14.90	5.00	0.771	1.010	0.505
Total	259.00	73.40	13.402	13.402	13.403

Table 2. Compare of transmission loss allocation with harmonic distortion of each load using the IEEE-14 bus systems

No. Bus	Transmission loss allocation (MW)			
	Losses without harmonic	Proposed with net harmonic distortion		
		$\Delta THD = 2.5\%$	$\Delta THD = 5\%$	$\Delta THD = 10\%$
1	7.094	7.182	7.269	7.440
2	0.090	0.091	0.092	0.094
3	3.087	3.125	3.163	3.238
4	1.003	1.015	1.028	1.052
5	0.101	0.102	0.103	0.106
6	0.158	0.160	0.162	0.166
7	0.000	0.000	0.000	0.000
8	0.010	0.010	0.010	0.010
9	0.610	0.618	0.625	0.640
10	0.205	0.208	0.210	0.215
11	0.069	0.070	0.071	0.072
12	0.132	0.134	0.135	0.138
13	0.339	0.343	0.347	0.356
14	0.505	0.511	0.517	0.530
Total	13.403	13.570	13.734	14.057

method considered more accurate Z bus, hence become to consider used for compare the proposed method.

In Table 2, can be seen that the transmission cost allocation is conditional, where:

Case-1 : Assume there are three loads of industry costumer with THD L3, L4 and L9 equal to 5% (according to *IEEE std*). Based on pro-rata method, the obtained TLA should be equal. This means that transmission owner will be charged according to pro-rata method original.

Case-2 : Assume there are three loads of industry costumer with THD is L3 5%, L4 (7.5%) and L9(10%). Therefore, based on pro-rata method, the owner of the transmission line will pay more according to THD rate. This means that transmission users will be charged due to the additional cost.

Case-3 : L3, L4 and L9 have THD of 7.5%,10% and

Syarifuddin Nojeng, Mohammad Yusri Hassan, Dalila Mat Said, Md.Pauzi Abdullah and Faridah Hussin

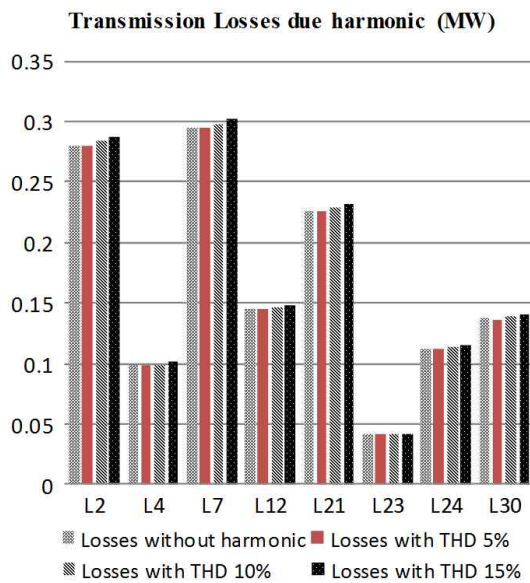


Fig. 3. Transmission losses allocation due to harmonic content, estimated using the IEEE-30 bus systems.

15% according to *IEEE std.* Based on pro-rata method, the users will pay more for the *TLA* compared to the payment in case-2. In this case, L3, L4 and L9 have higher *THD* content, therefore they will get *TLA* more than for the load in Case-1 and Case-2.

By using Eq. (25) above, that when the *THD* 5%, then we obtain that:

$$MW_{loss,Dj}^h = MW_{loss,Dj} \quad (28)$$

By the above equation in (28), then power losses are calculated according to the method used *TLA*. This proposal was then tested on the *IEEE 30 bus system* as shown in Fig 3. Based on the proposed method, at 10% *THD* for example in L2 load will has resulted losses of 0.284 MW and increase it if the *THD* load becomes 15% so on. The result will give a value significantly when the *THD* levels greater will increase in load. While for *THD* 5%, transmission losses is equal between existing methods with propose.

Based on the above, it will cause an increase in harmonic content losses on the transmission line. As a result, there is an increase in power flow in line caused by harmonics on the user. This condition causes a loss in the generation and transmission owners. For that, in order that the industry and gain the satisfaction and power providers are fair, then the harmonic components can be included in the calculation of the cost of transmission.

With reference to the *IEEE std.1459-2000* that defines 5% for *THD* of current, then the user can be charged additional costs due to harmonic, when has *THD* greater than 5%.

Further, the estimation results from the use of different IEEE bus systems can be a reference for transmission

owners in charging penalties to users who have the load quality below of standard. They can also provide information for determining the transmission charge scheme with considered harmonic content by each user, so that both economic aspect and technical aspects in power systems can be covered.

This proposal can provide a good economic signal to all parties in the deregulated of electricity industry supply in the future, especially for transmission owners. Besides, the industry consumer will be encouraged to improve load quality and energy efficiency.

5. Conclusion

This paper presents a new method to allocate the cost of transmission loss due to harmonics. The proposed method has shown differences in contribution costs in terms of conditions of harmonics in the use of transmission network. Through this method, the customer who uses electricity with higher *THD* will pay a higher transmission cost than other users. Meanwhile, the user who has *THD* content according to *IEEE std. 1459-2000* (until maximum limit is 5%) does not have to pay an additional charge to transmission owner.

This method also provides an alternative solution in the scheme for the determination of transmission charges for customers with varying load characteristic. Another benefit of this proposed method is that it provides economic signals for electricity industry supply, especially transmission and distribution company. The proposed method is suitable for the pool market in deregulated power system.

Acknowledgements

The authors would like to express gratitude to the Centre of Electrical Energy Systems (CEES) Universiti Teknologi Malaysia, the Government of South Sulawesi and Universitas Muslim Indonesia (UMI), for supporting this research study

References

- [1] Philip J. Talacek and Neville R. Watson, "Marginal Pricing of Harmonic Injection", *IEEE Transaction on Power System*, Vol. 17, No. 1, pp. 50-56, 2000.
- [2] Aiello M, et.al, "Theoretical and Experiment Comparison of Total Distortion Factor for The Evaluation of Harmonic and Inter harmonic Pollution of Grid-Connected Photovoltaic System", *IEEE transaction on Power Delivery*, vol. 2, no.3, pp. 1390-1397, 2006
- [3] Kisuk Kim, Chong Suk Song, Gilsung Byen, Hosung Jung, Hyungckul Kim, Gilson Jang, "Power Demand and Total Distortion Analysis for an EV Charging Station Concept Utilizing a Battery Energy Storage

Harmonic Distortion Contribution for the Transmission Loss Allocation in Deregulated Energy Market: A New Scheme for Industry Consumer

- System", *J. Electr. Eng. Technol.*, Vol. 8, No. 5, pp. 1234-1242, 2013.
- [4] Mojgan Hojabri1, Arash Toudeshki, "Power Quality Consideration for Off-Grid Renewable Energy Systems", *Energy and Power Engineering*, 5, pp. 377-383, 2013.
- [5] Yong Peng, Shun Tao, Qun Xu, Xiangning Xiao, "Harmonic Pricing Model Based on Harmonic Costs and Harmonic Current Excessive Penalty, 2011.
- [6] IEEE std.519-1992, "IEEE recommended practice and requirements for harmonics control in electrical power system", IEEE 12 april, 1993.
- [7] Hassan M.Y, Abdullah M.P, Hussin F, Hasimah A.R, Almaktar M.A, Majid M.S, "The impact of transmission loss component on transmission cost recovery in pool electricity markets", *International Review of Electrical Engineering*, 5 (4). pp. 1736-1746, 2010
- [8] Wilsun Xu, Yilu Liu, "A Method for Determining Costumer and Utility Harmonic Contribution at the Point of Common Coupling", *IEEE Transaction on Power Delivery*, Vol. 15, No. 2, pp. 804-811, 2000.
- [9] Jong-Hoon Han, Kyebyung Lee, Chong Suk Song, Gilsoo Jang, Gilsung Byeon, Chang-Hyun Park, "A New Assessment for the Total Harmonic Contributions at the Point, *J. Electr. Eng. Technol.* Vol. 8, 742-750, 2013.
- [10] M. Farhoodnea, Azah Mohamed, H. Shareef, R. A. Jabbar Khan, "An Improved Method for Determining Contribution of Utility and Customer Harmonic Distortions In A Power Distribution System, *International Journal on Electrical Engineering and Informatics* – Vol. 2, No. 3, 2010.
- [11] Il Ming K, Hieyong Ha S, Lee S.W, "Transmission loss allocation algorithm using path integral based on transaction strategy", *IEEE Transaction on Power Systems*, vol. 25, no. 1, pp. 195-205, 2010.
- [12] Conejo A.J, Arroyo J.M, Alguacil N, Guijaro A.L, "Transmission loss allocation: A Comparison of differential practical algorithms", *IEEE Transaction on Power Systems*, vol. 13, no. 3, pp. 571-576, 2002.
- [13] Rudnick H, Palma R, Fernandez J.E, "Marginal pricing and supplement cost al location in transmission open access", *IEEE Transaction Power Systems*, vol. 10, no. 2, pp. 1125-1142, 1995.
- [14] Bialek J, "Tracing the flow of electricity", *IEE Proc. Gener. Transmission and Distrib.*, 143 (4), pp. 313-320, 1996
- [15] Conejo A. J, Galiana F. D, Kockar I, "Z-bus loss allocation", *IEEE Transaction on Power Systems*, vol. 16, pp. 105-110, 2001.
- [16] Parastar A, Mozafari B, Pirayesh A, Omid H, "Transmission loss allocation through modified Z-bus", *Energy Conversion and Management*, (52), pp. 752-756, 2011.
- [17] Abdelkader S, "Transmission loss allocation in deregulated electrical energy market", *Electric Power System Research*, 76. pp. 962-967, 2006.
- [18] Reta R, Vargas A, "Electricity tracing and loss allocation methods based on electric concepts", *IEE Proc. Gener. Transm. Distrib.*, vol. 148, pp. 518-522, 2001.
- [19] Mateus J.C, Franco P.C, "Transmission loss allocation through equivalent bilateral exchange and economical analysis", *IEEE Transaction on Power Systems*, vol. 20, pp. 1799-1807, 2005.
- [20] Francisco D. Galiana, Antonio J. Conejo, Ivana Kockar, "Incremental Transmission Loss Allocation Under Pool Dispatch", *IEEE Transaction on Power Systems*, vol. 17, no.1, pp. 6-33, 2002.
- [21] Nojeng S, Hassan M.Y, Abdulah M.P, Hussin F, "Transmission loss allocation based on harmonic factor distortion in deregulated electricity supply industry", *IEEE conference on Industrial electronics and Application*, sept, 24-26, 2012.



Syarifuddin Nojeng received the B. Eng. in Electrical Engineering from Universitas Hasanuddin in 1988, and M.E.E. from Institut Teknologi Bandung (ITB), Indonesia in 1994. He is currently a Ph.D student at Faculty of Electrical Engineering, Universiti Teknologi Malaysia (UTM), Johor, Malaysia. His current research interests are power system deregulation and transmission pricing.



Mohammad Yusri Hassan (M'09) received his B.Eng. in Electrical and Electronics Engineering from Strathclyde University, UK in 1988, M.E.E. from Universiti Teknologi Malaysia (UTM) in 1993 and PhD from Strathclyde University, UK in 2004. Dr. Hassan is an Associate Professor and Director of Centre of Electrical Energy Systems (CEES) in the Faculty of Electrical Engineering at UTM, Johor, Malaysia. His research interest is in power system economics, transmission pricing and energy management. Dr. Hassan is a member of IEEE.



Dalila Mat Said (M'11) received B.Eng Degree, M.Sc Degree and PhD from Universiti Teknologi Malaysia. She is currently, a Senior Lecturer in the Faculty of Electrical Engineering at Universiti Teknologi Malaysia. Her research interest includes power quality and energy supply reliability. Dr. Said is a member of IEEE.

Syarifuddin Nojeng, Mohammad Yusri Hassan, Dalila Mat Said, Md.Pauzi Abdullah and Faridah Hussin



Md. Pauzi Abdullah (M'05-SM'13) received his B.Eng.in Electrical and Electronics Engineering from Universiti Tenaga Nasional, Malaysia in 2002, M.Sc. and PhD from Strathclyde University, UK in 2003 and in 2007 respectively. Dr. Abdullah currently is a Senior Lecturer in the Faculty of Electrical Engineering at UTM. His research interest is in power system economics and congestion management. Dr. Abdullah is a Senior Member of IEEE.



Faridah Hussin (M'11) received her B. Eng. in Electrical and Electronics Engineering from Strathclyde University, UK in 1987, and M.E.E. from Universiti Teknologi Malaysia (UTM) in 1990. Her research interests include power system economics and transmission congestion management.