

Similarity Check Effect of Spraying Discharge Towards the Microstructure Morphology of the AL Mg Powder Hardness as a Result of Water Atomization Process Using a Twenty-Hole Nozzle

by Pdti Turnitin

Submission date: 01-Nov-2023 07:44AM (UTC+0800)

Submission ID: 2213625941

File name: ijaerv9n24_289.pdf (3M)

Word count: 3135

Character count: 16131

3

2

Effect of Spraying Discharge Towards the Microstructure Morphology of the AL Mg Powder Hardness as a Result of Water Atomization Process Using a Twenty-Hole Nozzle

Muh. Halim Asiri^{1,3)}, Rudy Soenoko¹⁾, Agus Suprpto²⁾, Yudy Surya Irawan¹⁾

4

¹⁾ Brawijaya University, Mechanical Engineering Department, Engineering Faculty,
65145, Malang Indonesia

²⁾ Merdeka University, Mechanical Engineering Department, Engineering Faculty
65145, Malang Indonesia

³⁾ The Muslim University of Indonesia, Mechanical Engineering Department, 9023,
Makassar, Indonesia.

E – mail: masiri32@yahoo.co.id

ABSTRACT

1

Aluminum alloy is the base material to produce aluminum metal powders by using a water atomization system with a spraying method under a high pressure condition of about 30 to 40 psi. The water spraying discharge was set as $Q = 20$ l/s with a spraying angle variation of 20° , 30° and 40° and by implementing a 20 holed nozzle. Each nozzle hole has a diameter of $\phi_{\text{hole}} = 1\text{mm}$. The aim of setting these parameters is to get a fine and bulky aluminum alloy powder. The other objective is that a fine grain powder could have a better structure and hopefully can avoid porosity as well as improve the aluminum alloy mechanical properties, such as the metal hardness, metal tensile strength, metal ductility and of course a normal micro and macro structure. Furthermore, to determine the metal powder granules form and size it is depend on the spraying distance parameters variation. The spraying parameter variations are the nozzle spraying distance to the hot liquid metal and the nozzle angle toward the hot liquid metal stream (θ). In this research the parameter variations are 2.5 cm spraying distance for the 20° spraying angle, a 3.5 cm spraying distance for the 30° spraying angle and a 4.5 cm spraying distance for the 40° spraying angle. The spray angle variation would give a special powder shape characteristic. Moreover, the spray distance could give a specific powder number produced. From the three kind of spray angle variation the highest metal powder number produced occurs at a spray angle

of 30°, with a 3.5 cm spray distance a 297 grams of metal powder was produced. With a 20 holes nozzle and a nozzle hole diameter of $\varnothing = 1$ mm and a pressure of = 15 psi, and water flow rate of 15 l/s.

Keywords: Water Atomization, Granule shape, Micro-vickers, Macro and Micro Structure

INTRODUCTION

Public demand for the industry to continue to improve their productivity was the main concern that could not be denied. In addition to meet these needs, the industry should also increase their product quality, competing by offering reasonable product prices, a good product physical quality and a short production time, as well as to meet the customer design aspects demands. One of the technologies that developed nowadays to meet the community demands is powder metallurgy. Aluminum powder metallurgy is a technology of metal production in which the metal is produced from aluminum metal material. In producing this powder metallurgy, researchers used a system of water atomization by implementing two nozzles with a spraying direction from the left and right and a high pressure water jet. For the aluminum metal alloy smelting a special non-ferrous metals furnace is used with a maximum temperature 1300°C up to 1400°C and an Aluminum melting point of 650°C. The powder metallurgy process was first performed for cast iron, steel, nickel and a small number done on copper and some refractory metals such as molybdenum and tungsten. Some products made by implementing this powder metallurgy process are for example producing gears, bearings, electrical tools and household appliances. [1] Economically, powder metallurgy process for metal production is very profitable because of several things, such as:

- Powder metallurgy could produce the form that corresponds to the desired shape, a minimum or no finishing process is needed.
- Some of metal products that could not or difficult to produce by other means, can be produced by powder metallurgy system, for example: Wolfram Filament (tungsten)
- The product size could be easily controlled and be more precise with a tolerance of 0.13 mm.
- The powder metallurgy production process could be done automatically.

The powder metallurgy technology also has some weakness:

- PM production requires tools and production costs are relatively high.
- Metal powders could not flow by itself in the mold during the compacting process.
- The product strength could be varied for complex product shapes. [2] Aluminum alloy metals are widely used for automotive components, food packaging, home appliances and others. Aluminum alloy is widely used because it is corrosion-resistant and it is very light [3].

Hisashi [4] conducting a research using the Spinning Water Atomization Process (SWAP). This system process is one of the sophisticated powder metallurgy processing and a high performance is required, to get a fine powder [5].

Ileana [6] examined the process of making metal powders using water atomization with iron (Fe) as the raw material in order to obtain high quality powder. The iron powder product was then tested their mechanical properties and physical properties.

Suchart [7] examines the metal powders producing of stainless steel material AISi 304, by using water atomization and by combining the vertical and horizontal spray direction. Variables affecting this system are the product size; product shape and metal powder particles distribution. Other variables are the water pressure, water flow rate, temperature that is higher than the metal melting point and liquid metal flow rate.

Research done by Omar [8], is producing metal powders by water atomization for stainless steel. The purpose of this research is to increase the stainless steel physical properties and mechanical properties. This system is using the Metal Injection Molding (MIM).


In this research, three kind of spray angle was chosen which are the spray angle of $\theta = 20^\circ$, $\theta = 30^\circ$ and $\theta = 40^\circ$. The spray distance for $\theta = 20^\circ$ is 2.5 cm, while the spray distance for $\theta = 30^\circ$ is 3.5 cm and lastly for the spray angle of $\theta = 20^\circ$ the spray distance is 4.5 cm.

EXPERIMENTAL PROCEDURES

Before the metal smelting, weight as much as 300 grams aluminum alloy as the base metals and then melt it in the furnace with a melting temperature of 800 and then leave the melted aluminum about 30 minutes until the aluminum alloy melt completely. Furthermore, pour the melted metal into the water atomization barrel through a funnel and then spray the melted aluminum with a high pressure water spray about 15 to 20 psi with a 30° spray angle and a spray distance of 3.5 cm. Finally, a powder granulation process occurs. The granule product is then screened on a mesh of 8, 16, 30, 50, 100 and 200. The granule produced could be seen in table 1 below.

Table 1: The metal powder result amount for 3 spray angle variation with a 300 gram raw material and sprayed with a 20 hole nozzle with a nozzle diameter of 1mm.

No	Spray angle(θ)	Spray Distance	Pressure (P)	Powder amount (gr)
1	20°	2,5 cm	15psi	292
2	30°	3,5 cm	15psi	297
3	40°	4,5cm	15psi	279

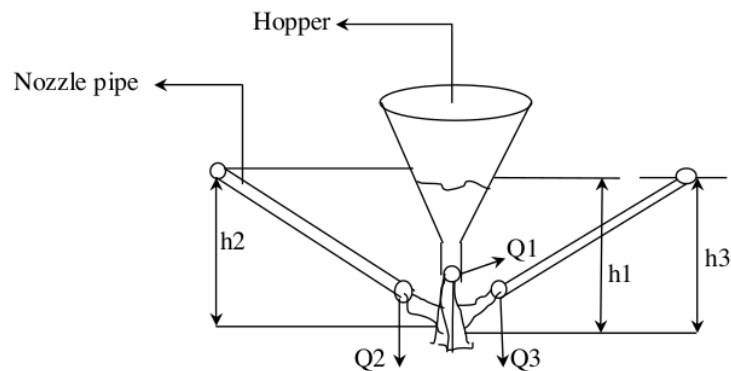

The chemical reaction that occurs at the time of the collision between the liquid hot metal with the speed of water spray:

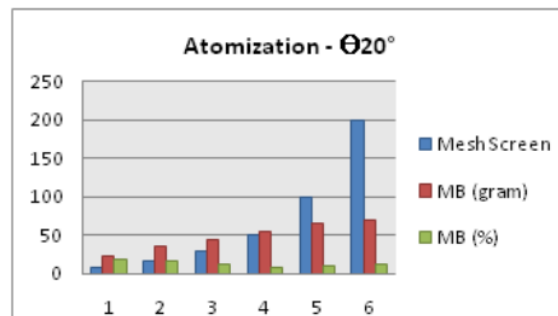
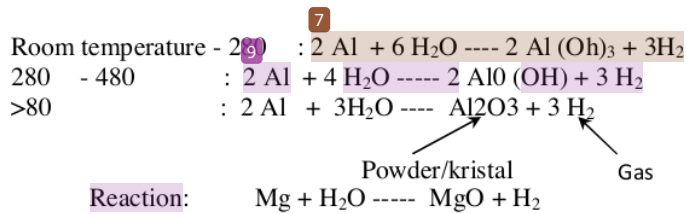


Fig 1: Atomization process graph results under a 20° spray angle

From figure 1 it is seen the powder product after a screen mesh result. The first aluminum raw material is about 300 grams and become 292 grams after the powdering process with a 20° spray angle, the MB percentage = 97.64%.The distance

between the hopper and the atomization process is about 2.5 cm, this is a very close distance so that a rapid cooling occurs. The powder product percentage would be very high and the grain powder size would be very fine and has a high strength.

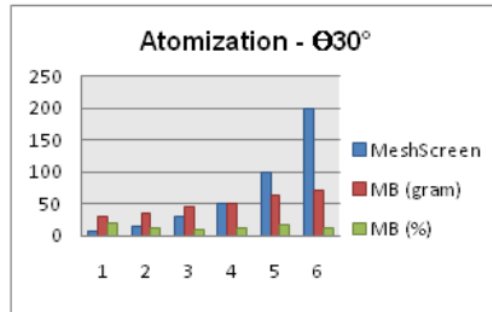


Fig 2: Atomization process graph results under a 30° spray angle

The distance between the hopper and the atomization process is about 3.5 cm, this distance is a very ideal distance, because the spray distance is not too far and not too close to the hopper outlet where liquid hot metal falls. The approximately powder mass weight (MB) = 297 grams. The powder product got a heat treatment process under a low cooling rate process. It would be a result of a ductile and high strength product.

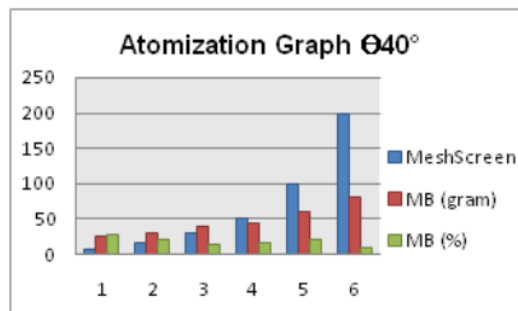


Fig 3: Atomization process graph results under a 40° spray angle

From figure 3 it is seen the powder product after a screen mesh result. The first aluminum raw material is about 300 grams and become 279 grams after the powdering process with a 40° spray angle, the MB percentage = 92.98%. The distance between the hopper and the atomization process is about 4.5 cm, this distance is a bit too far so that the cooling rate become a little bit too slow and would result in a large

aluminum granule size.

Hardness Test

All powder produced from the research would be test by a Micro Vickers Hardness.



Fig 4: Hardness test results for a 20° spray angle

From the micro-vickers hardness test results above it is seen that the hardness could reach a number of 52.65 Hv. It is caused by the high spray pressure, a spray angle of 75° and the spray distance 2.5 cm so that the liquid hot metal cools very quickly and the Al powder properties could change their properties, such as lowered the porosity.

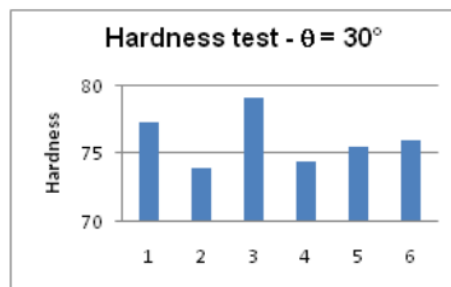


Fig 5: Hardness test results for a 30° spray angle

From the hardness test results (Figure 5) above it is seen that the hardness increase significantly and could reach an average number of 75.97 Hv. It is caused by the low granulation process time, a perfect spray distance of 3.5 cm and a water spray pressure of 15 psi. If the microstructure or phase changes, it will change the mechanical properties too, such as the hardness number, ductility and toughness.

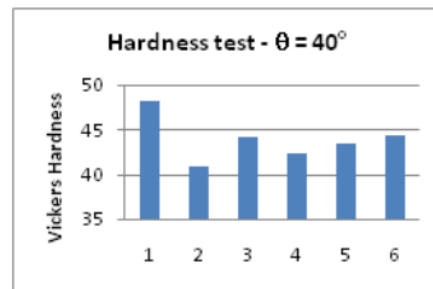


Fig 6: Hardness test results for a 40° spray angle

From the hardness test results for a spray angle of 40° (Figure 6) above it is seen that the hardness is a little bit lower than that the experiment for a spray angle of 20° and 30°. This is because of the spraying distance is too large (4.5 cm), so that cooling process would be longer than that in the 20° and 30° spray angle, and resulted a bigger powder grain size.

Micro Structure Test Result:

After getting the aluminum metal powder results a further powder microstructure was conducted using a Photo Optical Microscope with a magnification of 4000 times. This test done is to find out the microstructure content.

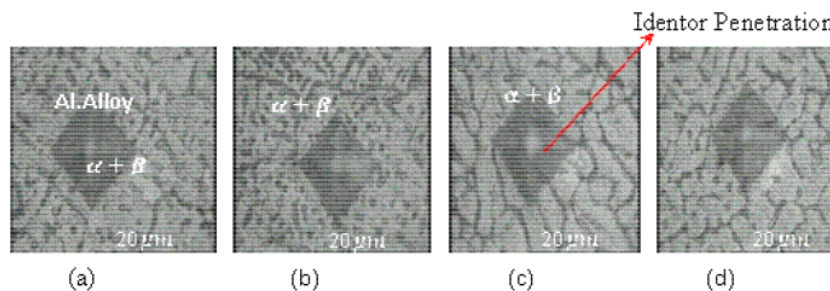


Fig 7: A Microstructure test result, 4000X magnification ($\theta = 20^\circ$)

From the microscope optic picture result, a $\alpha + \beta$ phase substance was identified with a 75% α content and 25% of β phase. The β phase has a harder characteristic compared with the α phase it could be seen from figure 7 (a), (b) and (c), this means that the material is more ductile.

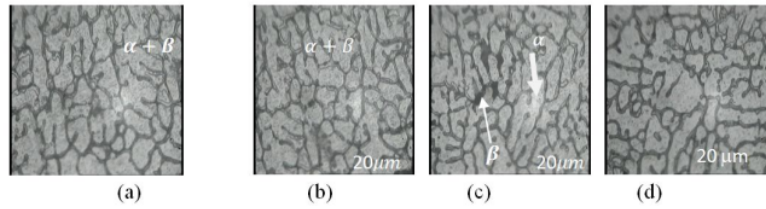


Fig 8: A Microstructure test result, 4000X magnification ($\theta = 30^\circ$)

From the microscope optic picture result, it is detected a $\alpha + \beta$ phase substance, the α phase is more dominant than the β phase. This is because of the spraying distance is little bit too far, which would affect the slow cooling process and resulted a recrystallization or a new grain growth process. This kind of powder has a strong and has a high ductility.

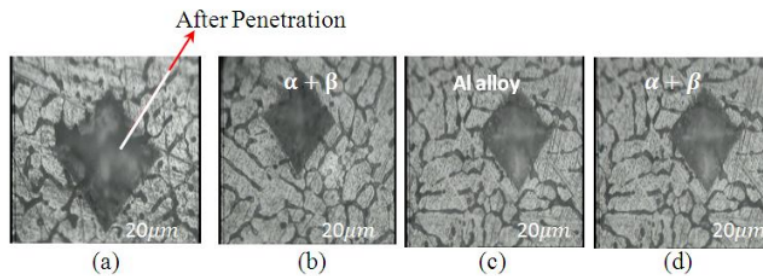


Fig 9: A Microstructure test result, 4000X magnification ($\theta = 40^\circ$)

From the microscope optic picture result, it is detected a $\alpha + \beta$ phase. On figure 9 part (a), (c) and (d) it could be seen that the grains are large. This kind of material has a strong and ductile characteristic. Furthermore, from figure 9 part (b) it is seen that the $\alpha + \beta$ phase has a more small structure. This kind of material is more ductile and hard compared with the materials shown in figure (a), (c) and (d).

The aim of Scanning Electron Microscope process is to identify and analyzed the material surface defect such as porosity, point defect and line defect.

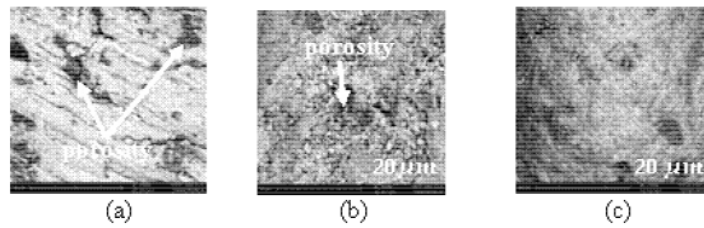


Fig 10: SEM photograph, water atomization process with a 20° spray angle. (5000 X)

On the 20° spray angle SEM photo result, it is seen on figure 10, part (a) and part (b) there has been some porosity while on part (c) there is almost no porosity. The porosity occurrence take place because there is no oxygen or hydrogen trapped during the granulation process. This is because of the rapid cooling process, so that very often a defect could take place such as a hole defect, crack defect, although some of the granules did not suffering from porosity.

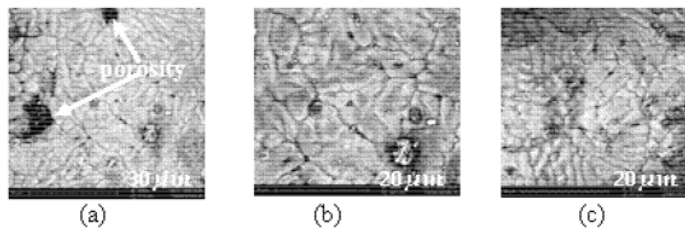


Fig 11: SEM photograph, water atomization process with a 30° spray angle. (4000 X)

On the 30° spray angle SEM photo result, it is seen on figure 11, part (a) porosity occurred while on part (b) and part (c) there is almost no porosity. The porosity did not appear because during the atomization process no oxygen or hydrogen was trapped during the granulation process. This is because of the rapid cooling process. From the whole research result the 30° spray angle gives the best metal powder quality.

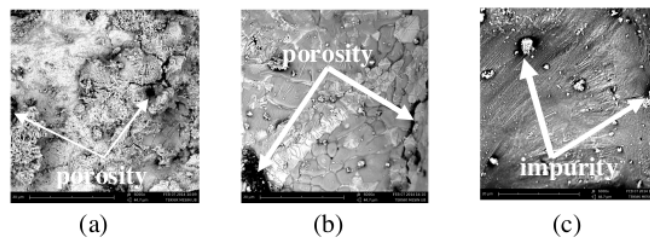


Fig 12: SEM photograph, water atomization process with a 40° spray angle. (5000 X)

On the 40° spray angle SEM photo result, it is seen on figure 12, part (a) and part (b) about the product structure has undergone porosity and part (c) there is no porosity, but there is a little bit impurity. With a spray distance rather far from the hopper mouth, about 4.5 cm, the cooling process would rather slow and ended with a grain surface porosity and cracks.

CONCLUSIONS

- The water atomization method implementing a 20 holes nozzle with a 1 mm diameter hole. The spraying angle variation is 20°, 30° and 40°. The liquid metal aluminum alloy temperature is around 850°C. According to the research result the 30° has the best result in producing the powder. With a mass of 297 grams, compared with the 20° spray angle with a result of 292 grams and 279 grams for the 40° spray angle. This is because of accurate the spray distance.
- The aluminum metal powder alloy hardness test results reported a $H_v = 75.96$ N for the 30° spray angle, which is the highest number compared with $H_v = 52.65$ N for the 20° spray angle and $H_v = 52.65$ N for the 40° spray angle. On the 30° spray angle the cooling process was continuously so that a process recrystallization process occurs, obviously the α and β phase forms small phases and resulted a hard and strong material.
- From the water atomization process microstructure test under the three spray angle variations the 30° spray angle gives the best product result. The α phase content has a higher amount compared with the β phase it would resulted a ductile and strong material.
- From the SEM, the 30° spray angle gives the best result too, no porosity and impurities occurs in this spray angle variation.

ACKNOWLEDGEMENT

Special and deeply thanks I dedicate to the Technicians in the Metallurgy Laboratory of Mechanical Engineering – Brawijaya University Malang, Metallurgy Laboratory of Mechanical Engineering and Faculty of Engineering, University of Muslim Indonesia

Makassar, and University of Malang (UNM)

REFERENCES

- [1] Groover, Mikell P. 1996. "Fundamentals of Modern Manufacturing Material Processes and Systems", By Prentice-Hall, Inc. A Simon and Schester Company, Upper Suddie River, New Jersey 07458
- [2] Elsayed Ayman, et. al, 2008. "Mechanical Characteristics of Hot Extruded Non-Combustible Magnesium Alloy using Water Atomized Powder", Transactions of JWRI, vol.37, No.2
- [3] Dunkley, J. J. and Norval. D. 2008. "Atomization of Ferro Alloys Transformation through Technology ISBN o-9584663-5-1
- [4] Imai Hisashi. Kawakami Masashi. Kondoh Katsuyoshi. Otsuka Isamu and Izaki Hiroshi, 2007. "Characteristics of Hot Extruded P/M Aluminum Alloy When Using the Rapidly Solidified Powder SWAP Process
- [5] Matthew L, Anderson, 2000."Gas Atomization of Metal Hydrides for Ni-MHBattery Applications", Journal of Alloy and Compounds 47-52
- [6] Ileana Nicoleta Popescu, Dionezie Bojin, Irina Carceanu, Gabriela Novac, Florina Violeta Anghelina, 2010, "Morphological and Structural Aspects Using Electronic Microscopy and Image Analysis of IRON Powers Obtained by Water Atomization Process". Metallurgical Research Institute, Romania
- [7] Suchart, 2011. "Design and Construction of Water Atomizer for Making Metal Powder", Journal of Metal, Vol. 21 No. 1, Thailand
- [8] Omar, M.A. I. Subuki, N.S. Abdullah, N. Mohd Zainon and N.Roslani, 2012."Processing of Water – Atomized 316L Stainless Steel Powder Using Metal-Injection Processes", Vol. 8, 1-13
- [9] Demirskyi, D. Agrawal. D, Ragulya, A. 2011."Neck Growth Kinetics during MicrowaveSintering of Nickel Powder", Journal of Alloy and Compo 1790-1795
- [10] Taku Iwaoka, and Mitsuru Nakamura. 2011."Effect of Compaction Temperature on Sinterabilityof Magnesium and Aluminum Powder Mixtures by Warm Compaction Method", Materials Transactions, Morioka 020-8551, Japan
- [11] M.H.I, Ibrahim, N. Muhammad and A.B. Sulong. 2009."Rheological Investigation of Water Atomized Stainless Steel Powder for Micro Metal Injection Molding", (IJMME),Vol.4
- [12] Suk Hwan Chung, et. al, 2010."Modeling and Simulation of Press and Sinter Powder Metallurgy", ASM Hand Book, Volume 22B, Metal Process simulation, San Diego StateUniversity
- [13] Shanmuga. Velayutham, G, and Selvarajan. V. 2004."Plasma Spheroidization of Nickel Powders in a Plasma Reactor", Bull Mater, Sci, 27, No.5, pp 453-457, Indian Academy of Science
- [14] Naveen Beri, S. at al.2008. "Performance Evaluationof Powder Metallurgy Electrode in Electrical Discharge Machining of AISI D2 Steel Using Taguchi

- Method”, International Journal of Aerospace and Mechanical Engineering
- [15] Alan Lawley, APMI, 2009. "International Journal of Powder Metallurgy Focus Issue: Precious Metals" International, Princeton, USA, September/October, Volume 45, Issue 5, pp1-55
- [16] Mater.J.Sci., 2010. "The Rapid Solidification Processing of Materials", Advances and Application, 45 – 287 – 325
- [17] Sulema, P. Klimczyk, P, Hyjek, P.,2009."The Influence of Sintering Conditions on The Properties of Stainless Steel Reinforced With Ti B2 Ceramic",Institute of Technology, Pedagogical University, UI, Podchorazych 2,30- 287-325
- [18] Thitirat, Theerabomkul and Sukasem Kangwantrakool, 2005. "Fabrication of Al₂O₃-Ni Composites Using Ceramic Nanoparticles School of Ceramic Engineering, Institute of Engineering, Suranaree University of Technology, Journal Special Issue on Nano Technology Vol.4.No.1

Similarity Check Effect of Spraying Discharge Towards the Microstructure Morphology of the AL Mg Powder Hardness as a Result of Water Atomization Process Using a Twenty-Hole Nozzle

ORIGINALITY REPORT

16%

SIMILARITY INDEX

16%

INTERNET SOURCES

2%

PUBLICATIONS

2%

STUDENT PAPERS

PRIMARY SOURCES

1	www.researchgate.net Internet Source	11%
2	www.ripublication.com Internet Source	1%
3	www.slideshare.net Internet Source	1%
4	Submitted to Udayana University Student Paper	1%
5	jmmm.material.chula.ac.th Internet Source	1%
6	K Suarsana, I M Astika, P W Sunu. " Properties of thermal conductivity, density and hardness of aluminium matrices with reinforcement of sicw / al o hybrid after sintering process ", IOP Conference Series: Materials Science and Engineering, 2019 Publication	<1%

7

cdn.slideserve.com

Internet Source

<1 %

8

ir.library.osaka-u.ac.jp

Internet Source

<1 %

9

en.wikipedia.org

Internet Source

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On