

BUKTI KORESPONDENSI
ARTIKEL JURNAL INTERNASIONAL BEREPUTASI

Judul Artikel : Effect Of Oil Use On Agglomeration Process For Coal Quality Improvement
Jurnal : International Journal on "Technical and Physical Problems of Engineering"
(IJTPE). Vol/No/Hal: 16/3/36-40
Penerbit : International Organization of IOTPE
Penulis : Nurliah Jafar, Muhammad Idris Juradi, Suriyanto Bakri, Lamatinulu

No.	Perihal	Tanggal
1.	Bukti konfirmasi submit artikel dan artikel yang disubmit	24 januari 2024
2.	Bukti konfirmasi review (Cek kemiripan/Similarity) dan hasil review pertama	25 Januari 2024
3.	Bukti konfirmasi submit revisi pertama, respon kepada reviewer dan artikel di resubmit	26 Januari 2024
4.	Bukti konfirmasi review (Cek kemiripan/Similarity) kedua	27 Januari 2024
5.	Bukti konfirmasi review ketiga	4 Februari 2024
6.	Bukti konfirmasi submit revisi ketiga dan respon kepada reviewer serta artikel yang diresubmit	12 Februari 2024
7.	Bukti Konfirmasi review keempat	12 Februari 2024
8.	Bukti Konfirmasi submit revisi ketiga dan respon kepada Reviewer serta artikel yang diresubmit	13 Februari 2024
9.	Bukti Konfirmasi artikel accepted	13 Februari 2024
10.	Bukti Konfirmasi artikel published online	27 September 2024

**1. Bukti konfirmasi submit artikel dan artikel yang
disubmit (24 Januari 2024)**

Submission manuscript Muhammad Idris Juradi External Inbox x



Muh. Idris Juradi <muhidris.juradi@umi.ac.id>
to ijtp, ijtp0

Jan 24, 2024, 5:31 PM

Dear journal managers,

Attached is our manuscript article with the title "EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT" Author M.I. Juradi, S.Bakri, Lamatinulu.

We hope that our manuscript will soon be processed further.

Best regards

Muhammad Idris Juradi

One attachment • Scanned by Gmail



EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

N. Jafar¹ M.I. Juradi¹ S.Bakri¹ Lamatinulu²

1. Department of Mining Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, nurliah.jafar@umi.ac.id, muhidris.juradi@umi.ac.id, suriyanto.bakri@umi.ac.id,
2. Department of Industrial Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, Lamatinulu@gmail.com

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal. (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

Data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources indicate that Indonesia has a very large potential for coal resources., Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Beyond calorific value, ash (A) and sulphur (S) are contaminants and a measure of coal quality. Burning coal will produce sulphur (S) oxides due to its sulphur (S) concentration. [3]. This substance may react with atmospheric water vapour to produce H_2SO_3 and H_2SO_4 . Acid rain will happen if both acids are polluted in the atmosphere and descend with rains at the same time. Sulphur (S) oxides released from burning coal have the potential to produce acid rain hundreds of miles away. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Washing the coal reduces the amount of ash (A) and sulphur (S) from inorganic components; this process is known as the agglomeration technique [5]. The presence of sulfur will also affect the compounds present in coal so that it is necessary to reduce the sulfur content [6].

Ash (A) and sulphur (S) may be effectively removed from coal using the oil-water agglomeration method. Oil agglomeration can be used to create a solid, viscous product by combining coal particles of various sizes, or agglomerates [7]. Because the coal surface is hydrophobic (hates water) and lipophilic (loves oil), this agglomeration approach can be used. [8]. Waste material is submerged in the media, but clean coal floats in the same medium (water) [9].

Coal particles may be formed into agglomerates to create coal oil mixes since they are hydrophobic by nature [10]. However, the hydrophilic mineral particles that give coal its ash (A) and sulphur (S) are unaffected and stay in the water [11]. The coal agglomeration particles may be separated from the mineral particles because they are bigger. When oil is present during washing, water containing ash (A) will no longer stick to the coal surface [12]. This study is to examine the use of virgin coconut oil

and palm cooking oil on lowering ash (A), sulphur (S), and raising the calorific value (CV) of coal, as well as to ascertain the impact of oil volume variation.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1,000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24. The resulting agglomerate is then ovenised at 110°C for 2 hours.

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [13], volatile matter standard method ASTM D3175 [14], fixed carbon standard method ASTM D5142 [15], ash content with standard method used ASTM D3174 [16], total sulfur analysis ASTM D2492 [17] and calorific value with standard measurement ASTM D2015 [18]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1) [16], the equation for reducing sulfur content (equation 2) [17] and increasing calorific value (equation 3) [18] can be calculated using the equation:

$$\text{Decrease in AC (\%)} = \frac{(a_1 - a_2)}{a_2} \cdot 100\% \quad (1)$$

$$\text{Decrease in S (\%)} = \frac{(S_1 - S_2)}{S_2} \cdot 100\% \quad (2)$$

$$\text{Increase in CV (\%)} = \frac{(C_1 - C_2)}{C_1} \cdot 100\% \quad (3)$$

Table 1. Description of equations 1-3 [16, 17, 18]

No.	Description	Unit	Code
1	Ash content of coal samples	%	a ₁
2	Coal ash content after agglomeration process	%	a ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Analysis of the characteristics of coal samples reveals the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) by 2.78% and The Calorific Value (CV) of 3,648 cal/gr. Table 2 displays the full coal analysis results.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3,648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters				
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)
	AC	Decrease in AC (%)			
Starting Coal	36.72		2.78		3,648
CPO 10 mL	24.70	32.73	1.96	29.50	4,402
CPO 15 mL	22.84	37.80	1.68	39.57	4,670
CPO 20 mL	15.55	57.65	1.30	53.24	5,124
VCO 20 mL	9.77	73.39	1.79	35.61	5,037

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL. In Figure 1 below, the outcomes of the proximate analysis are displayed.

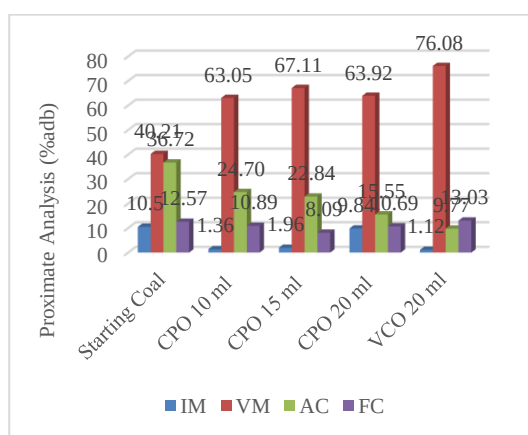


Figure 1. Comparison of proximate analysis after agglomeration process

Figure 1 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [19] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing the agglomeration process [20]. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 24.70%, 22.84%, 15.55% and 9.77%.

Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Since coal agglomerate particles are larger than mineral particles, they can be [21]. The fixed carbon value decreased by about 10.89% 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 2 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68% 1.30% and 1.79%. Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Coal agglomerate particles may be isolated from mineral particles because they are bigger [22].

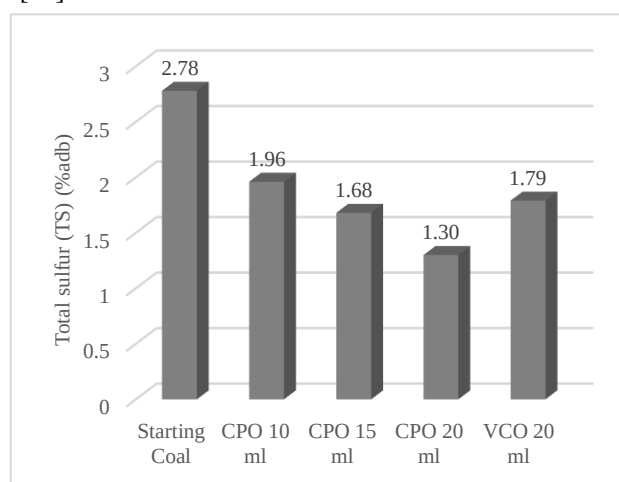


Figure 2. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 3 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89% 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [23].

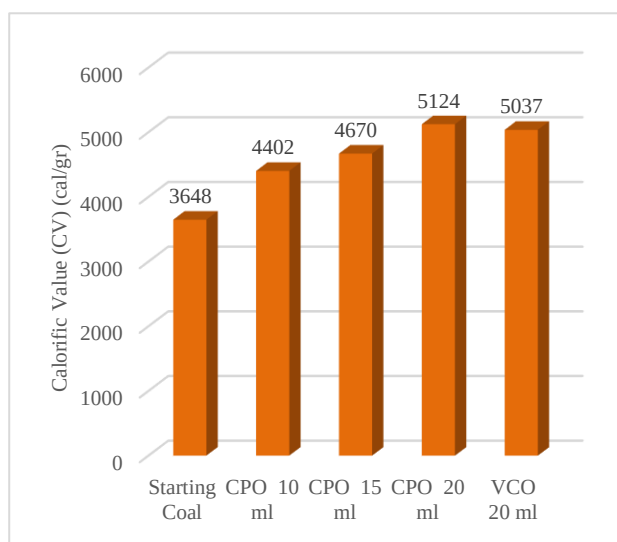


Figure 3. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV). It can be seen that the use of virgin coconut oil (VCO) in the agglomeration process is the optimum result obtained.

ACKNOWLEDGEMENTS

The faculty of industrial technology provided the writers with moral and financial support that allowed them to do this study and write an essay.

REFERENCES

- [1] Ministry of Energy and Mineral Resources, "Indonesia's Mineral & Coal Policy". Jakarta: Directorate General of Mineral and Coal, 2021a.
- [2] Ministry of Energy and Mineral Resources, "Road Map for Coal Development and Utilisation". Jakarta: Directorate General of Mineral and Coal, 2021b.
- [3] R. Prabowo and I. Prengki, "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using minyak jelantah", IOP Conference Series: Earth and Environmental Science, Vol. 413, No. 1, pp. 34-40, 2020.
- [4] C. Cerik and V. Arslan, "The Modelling Of Fine Coal Beneficiation With A Water-Only Cyclone", Gospodarka Surowcami Mineralnymi - Mineral Resources Management, Vol. 38, No. 3, pp. 137-150, Jul. 2023.
- [5] E. Sanwani, A. Ibrahim, A. Sudarsono, and I. Handayani, "Coal Washing", Bandung: Department of Mining Engineering, Bandung Institute of Technology, 1998.
- [6] R.G. Abaszade, A.G. Mammadov, V.O. Kotsyubynsky, E.Y. Gur, I.Y. Bayramov, E.A. Khanmamadova and O.A. Kapush, "Modeling Of Voltage-Ampere Characteristic Structures On The Basis Of Graphene Oxide/Sulfur Compounds", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 2, pp. 302-306, 2022.
- [7] A. Nelvi, A. Fadhly, J. A. Wardani, and H. Rahmi, "Optimisation of Calorific Value and Ash Content of Brown Coal Using Crude Lime-Palm Oil-Water Agglomeration Method", Mining Journal, Vol. 6, No. 4, pp. 178-183, Feb. 2023.
- [8] M. Özer, O. M. Basha, and B. Morsi, "Coal-Agglomeration Processes: A Review", International Journal of Coal Preparation and Utilization, Vol. 37, No. 3, pp. 131-167, May 2017.
- [9] Nukman and S. Poertadji, "Reduction of Ash and Sulphur Content in Sub Bituminous Coal by Palm Oil-Water Agglomeration Method", Indonesian Journal of Materials Science, Vol. 7, No. 3, pp. 31-36, 2006.
- [10] S. Wang and X. Tao, "Effect Of Surfactants On The Flotation Performance Of Low-Rank Coal By Particle Sliding Process Measurements", Mineral Resources Management, Vol. 34, No. 1, pp. 69-82, 2018.
- [11] M. Arifin, E. Sanwani, and S. K. Chaerun, "Removal Of Sulfur And Ash From Indonesian Coal By Indigenous Mixotrophic Bacteria", Current Research on Biosciences and Biotechnology, Vol. 1, No. 2, pp. 71-76, Feb. 2020.
- [12] S. R. Nurhawaisyah, E. Sanwani, S. K. Chaerun, and M. A. Rasyid, "Clean Coal Technology Using An Iron-And Sulfur-Oxidizing Mixotrophic Bacterium", IOP Conf Ser Mater Sci Eng, Vol. 478, No. 34, pp. 103-109, 2019.
- [13] ASTM D3173/D3173M-17a, "Standard Test Method For Moisture In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2017

- [14] ASTM D3175-18, "Standard Test Method For Volatile Matter In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2018.
- [15] ASTM D5142-09, "Standard Test Method For Fixed Carbon In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2009
- [16] ASTM D3174-12, "Standard Test Method For Ash In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2012.
- [17] ASTM D2492-02, "Standard Test Method For Sulfur In Coal", ASTM International, West Conshohocken, PA, 2002.
- [18] ASTM D2015-00, "Standard Test Method For Gross Calorific Value Of Coal And Coke By The Adiabatic Bomb Calorimeter", ASTM International, West Conshohocken, PA, 2000.
- [19] R. Pratama, Sufriadin, and S. Widodo, "Study Of Increasing The Calorific Value Of Coal Using Waste Cooking Oil", IOP Conf Ser Earth Environ Sci, vol. 1134, No. 1, pp. 78-82, Jan. 2023.
- [20] M. Irsyad, A. Amrizal, M.D. Susila, A. Amrul and T.M. Fransisco, "Heat Transfer Characteristics Of Coconut Oil As Phase Change Materials In Freezing Process", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 1, pp. 29-33, 2022.
- [21] A. Aladin, "Empirical Modelling of Coal Desulphurisation by Flotation with Rayleigh Method", Journal of Chemical Process Engineering, Vol. 5, No. 1, pp. 45-53, 2020.
- [22] A. Aladin, "Determination of the Optimum Ratio of CPO: Coal in Desulphurisation and Deashing by Continuous Flotation System", Journal of Process Engineering, Vol. 3, No. 2, pp. 50-56, 2009.
- [23] N. M. N. W. H. H. Agung, "Relationship between total sulphur content and gross calorific value of coal PT. Carsurin Samarinda", Journal of Mineral Technology, Vol. 7, No. 1, pp. 1-8, 2019.

BIOGRAPHIES



Name: Nurliah
Surname: Jafar
Birthday: 29.09.1984
Birthplace: Barru, Indonesia
Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2008

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2014

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2009

Research Interests: Exploration mining

Scientific Publications: 38 Research

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Muhammad

Middle Name: Idris

Surname: Juradi

Birthday: 12.02.1992

Birthplace: Malili, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 2014

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2017

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2016

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 22 Papers, 4 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Suriyanto

Surname: Bakri

Birthday: 19.11.1986

Birthplace: Sidrap, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2009

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2018

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2018

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 29 Papers, 3 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: **Lamatinulu**

Surname: **Lamatinulu**

Birthday: 08.06.1969

Birthplace: Palopo, Indonesia

Bachelor: Industrial Engineering and Management, Industrial Engineering Department, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Master: Industrial Management, Department of Industrial Engineering, Faculty of Industrial Technology, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia, 2002
Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Doctorate: Manufacturing Industrial Engineering, Mechanical Engineering Department, Faculty of Engineering, Brawijaya University, Malang, Indonesia, 2018

The Last Scientific Position: Prof., Department of Engineering Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2007

Research Interests: Operation Research, Performance Measurement, Product Development, Production Planning and Control

Scientific Publications: 30 Papers, 3 Books, 7 Copyrights, 5 Research Projects

Scientific Memberships: Indonesian Engineers Association, Indonesian Lecturer Association

2. Bukti Konfirmasi review dan hasil review pertama (25 Januari 2024)



Int Journal of IJTPE (IJTPE) <ijtp0@gmail.com>

to me ▾

Jan 25, 2024, 6:53 PM



Dear Author,

SIR = 14%

- **REDUCE THE SIMILAR PARTS (SIR) AND CONTENTS UNDER 5%**

Please note to the following comments to proceed your submitted paper in the IJTPE journal:

- **You are advised to change/improve and rephrase the colored paragraphs/sentences to your own phrases, contribution and research.**

- Review very carefully your revised paper that the colored paragraphs /sentences to be totally changed/improved.

- Publish the Similarity Index Reports (SIR) and trusted plagiarism of the revised paper using available services (e.g. www.iThenticate.com) and try to reach **SIR<5%**

- The result of plagiarism services should completely report the similarities percentage and address them.

- Send the **revised paper** in the IJTPE format AND the **SIR** to be checked out by the journal review system (It is necessary to receive the submitted papers + SIR from the authors every time.)

One attachment • Scanned by Gmail ⓘ



1826-240125-SIR.docx

EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

In Indonesia, the potential for coal resources is very abundant, according to data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources, Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Ash (A) and sulfur (S) are impurities and one of the parameters of coal quality besides calorific value. The sulfur (S) content in coal, when burnt, will turn into sulfur (S) oxides [3]. This compound can react with water vapour in the air to form H_2SO_3 and H_2SO_4 . If both acids are contaminated in the air and fall together with rainwater, acid rain will occur. The release of sulfur (S) oxides from burning coal can cause acid rain for hundreds of kilometres. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Ash (A) and sulfur (S) from inorganic materials in coal can be reduced by washing the coal, and this method is called the agglomeration method [5].

The oil-water agglomeration method is an effective technique for removing ash (A) and sulfur (S) from coal, agglomeration can be used to produce a solid, viscous product combined from different sizes of coal particles, referred to as agglomerates [6]. This agglomeration method can be applied due to the lipophilic (oil loving) and hydrophobic (water hating) nature of the coal surface [7]. Material that sinks in the media is waste material, while material that floats in the same media (water) is clean coal [8].

As coal particles are hydrophobic in nature, they can be made into agglomerates in the form of coal oil blends [9]. On the other hand, hydrophilic mineral particles which are the source of ash (A) and sulfur (S) in coal are not affected and remain in the water [10]. Since the coal agglomerate particles are larger than the mineral particles, they can be separated, with the presence of oil during washing resulting in water mixed with ash (A) will no longer adhere to the coal surface [11]. This study aims to determine the effect of oil volume variation and compare the use of palm cooking oil and virgin coconut oil

reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24 hours as seen in Figure 1. The resulting agglomerate is then ovenised at 110°C for 2 hours, until only inherent moisture remains in the coal pores as seen in Figure 2.



Figure 1. Agglomerate screening for 24 hours



Figure 2. Sample that has been in the oven

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [12], volatile matter standard method ASTM D3175 [13], fixed carbon standard method ASTM D5142 [14], ash content with standard method used ASTM D3174 [15], total sulfur analysis ASTM D2492 [16] and calorific value with standard measurement ASTM D2015 [17]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1), the equation for reducing sulfur content (equation 2) and increasing calorific value (equation 3) can be calculated using the equation:

$$\text{Decrease in Ash Content (\%)} = \frac{(A1-A2)}{A2} \times 100\% \quad (1)$$

$$\text{Decrease in total sulfur (\%)} = \frac{S1-S2}{S2} \times 100\% \quad (2)$$

$$\text{Increase in calorific value (\%)} = \frac{C1-C2}{C1} \times 100\% \quad (3)$$

Table 1. Description of equations 1-3

No.	Description	Unit	Code
1	Ash content of coal samples	%	A ₁
2	Coal ash content after agglomeration process	%	A ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Coal samples parameters analysis shows the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) 2.78% and The Calorific Value (CV) of 3648 cal/gr. The detailed result of coal analyses are shown in Table 2.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters					
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)	Increase in CV (%)
	AC	Decrease in AC (%)				
Starting Coal	36,72		2,78		3.648	
CPO 10 mL	24,70	32,73	1,96	29,50	4.402	20,67
CPO 15 mL	22,84	37,80	1,68	39,57	4.670	28,02
CPO 20 mL	15,55	57,65	1,30	53,24	5.124	40,46
VCO 20 mL	9,77	73,39	1,79	35,61	5.037	38,08

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL on the results of proximate analysis can be seen in Figure 3 below.

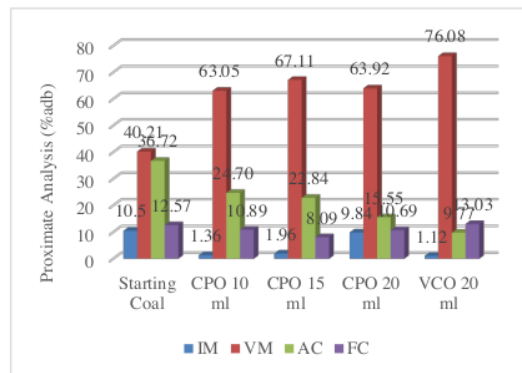


Figure 3. Comparison of proximate analysis after agglomeration process

Figure 3 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [18] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing process. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 21.0%, 22.84%, 15.55% and 9.77%.

Because coal particles are hydrophobic by nature, they can be made into agglomerates in the form of coal-oil blends. On the other hand, hydrophilic mineral particles (which are the source of ash (A) and sulfur (S) content in coal) are not affected and remain in the water. Since coal agglomerate particles are larger than mineral particles, they can be [19]. The fixed carbon value decreased by about 10.89%, 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 4 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68%, 1.30% and 1.79%. Because coal particles are hydrophobic by nature, they can be made into agglomerates in the form of coal-oil blends. On the other hand, hydrophilic mineral particles (which are the source of ash (A) and sulfur (S) content in coal) are not affected and remain in the water. Since coal agglomerate particles are larger than mineral particles, they can be separated [20].

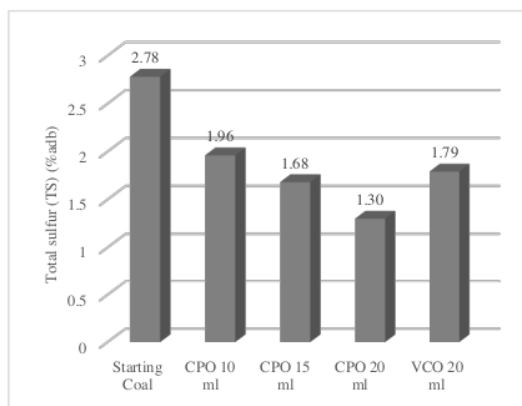


Figure 4. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 5 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89%, 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [21].

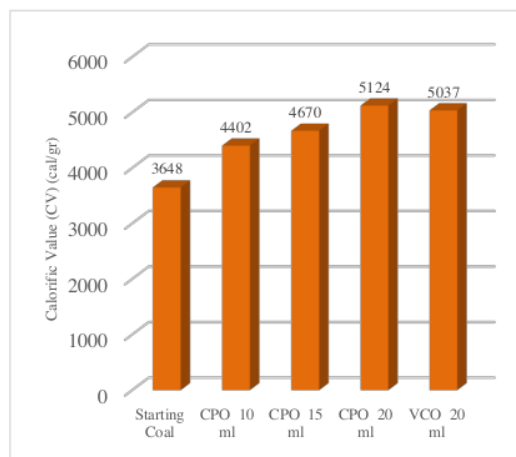


Figure 5. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV)

8

ACKNOWLEDGEMENTS

The authors are grateful to the faculty of industrial technology for financial and moral assistance so that this research can be carried out and produce an article.

14%

SIMILARITY INDEX

PRIMARY SOURCES

- 1

H Prabowo, I Prengki. "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using "minyak jelantah"", IOP Conference Series: Earth and Environmental Science, 2020
Crossref

270 words — 10%
- 2

R Pratama, Sufriadin, S Widodo. "Study of increasing the calorific value of coal using waste cooking oil", IOP Conference Series: Earth and Environmental Science, 2023
Crossref

40 words — 1%
- 3

[mafiadoc.com](#)
Internet

24 words — 1%
- 4

[doaj.org](#)
Internet

17 words — 1%
- 5

Edwin Akhdiat Daranin, Datin Fatia Umar, Gunawan, Nendaryono, Z. Zulfahmi, Truman Wijaya, Liston Setiawan. "Preliminary study of the methanol production process from coal to support the coal downstream program", IOP Conference Series: Earth and Environmental Science, 2023
Crossref

13 words — < 1%
- 6

[etheses.uin-malang.ac.id](#)
Internet

12 words — < 1%

7

4youkebab.pl
Internet

10 words — < 1%

8

D Triardianto, N Bintoro. "The Effect of Gaseous Ozone Exposure and Storage Room Temperatures on Ethylene Production, Peel Colour, and Total Soluble Solid Content of Banana Fruit (*Musa acuminata*) During Storage", IOP Conference Series: Earth and Environmental Science, 2021
Crossref

9 words — < 1%

EXCLUDE QUOTES OFF
EXCLUDE BIBLIOGRAPHY OFF

EXCLUDE SOURCES OFF
EXCLUDE MATCHES OFF

**3. Bukti konfirmasi submit revisi pertama, respon
kepada reviewer dan artikel di resubmit (26 Januari
2024)**



Muh. Idris Juradi <muhidris.juradi@umi.ac.id>
to Int ▾

Jan 26, 2024, 9:31AM



Dear Journal managers,

Please find below the revised manuscript that we have paraphrased.

Best regards,

Muhammad Idris Juradi

One attachment • Scanned by Gmail ⓘ



EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

N. Jafar¹ M.I. Juradi¹ S.Bakri¹ Lamatinulu²

1. Department of Mining Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, nurliah.jafar@umi.ac.id, muhidris.juradi@umi.ac.id, suriyanto.bakri@umi.ac.id,
2. Department of Industrial Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, Lamatinulu@gmail.com

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal. (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

Data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources indicate that Indonesia has a very large potential for coal resources., Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Beyond calorific value, ash (A) and sulphur (S) are contaminants and a measure of coal quality. Burning coal will produce sulphur (S) oxides due to its sulphur (S) concentration. [3]. This substance may react with atmospheric water vapour to produce H_2SO_3 and H_2SO_4 . Acid rain will happen if both acids are polluted in the atmosphere and descend with rains at the same time. Sulphur (S) oxides released from burning coal have the potential to produce acid rain hundreds of miles away. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Washing the coal reduces the amount of ash (A) and sulphur (S) from inorganic components; this process is known as the agglomeration technique [5]. The presence of sulfur will also affect the compounds present in coal so that it is necessary to reduce the sulfur content [6].

Ash (A) and sulphur (S) may be effectively removed from coal using the oil-water agglomeration method. Oil agglomeration can be used to create a solid, viscous product by combining coal particles of various sizes, or agglomerates [7]. Because the coal surface is hydrophobic (hates water) and lipophilic (loves oil), this agglomeration approach can be used. [8]. Waste material is submerged in the media, but clean coal floats in the same medium (water) [9].

Coal particles may be formed into agglomerates to create coal oil mixes since they are hydrophobic by nature [10]. However, the hydrophilic mineral particles that give coal its ash (A) and sulphur (S) are unaffected and stay in the water [11]. The coal agglomeration particles may be separated from the mineral particles because they are bigger. When oil is present during washing, water containing ash (A) will no longer stick to the coal surface [12]. This study is to examine the use of virgin coconut oil

and palm cooking oil on lowering ash (A), sulphur (S), and raising the calorific value (CV) of coal, as well as to ascertain the impact of oil volume variation.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1,000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24. The resulting agglomerate is then ovenised at 110°C for 2 hours.

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [13], volatile matter standard method ASTM D3175 [14], fixed carbon standard method ASTM D5142 [15], ash content with standard method used ASTM D3174 [16], total sulfur analysis ASTM D2492 [17] and calorific value with standard measurement ASTM D2015 [18]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1) [16], the equation for reducing sulfur content (equation 2) [17] and increasing calorific value (equation 3) [18] can be calculated using the equation:

$$\text{Decrease in AC (\%)} = \frac{(a_1 - a_2)}{a_2} \cdot 100\% \quad (1)$$

$$\text{Decrease in S (\%)} = \frac{(S_1 - S_2)}{S_2} \cdot 100\% \quad (2)$$

$$\text{Increase in CV (\%)} = \frac{(C_1 - C_2)}{C_1} \cdot 100\% \quad (3)$$

Table 1. Description of equations 1-3 [16, 17, 18]

No.	Description	Unit	Code
1	Ash content of coal samples	%	a ₁
2	Coal ash content after agglomeration process	%	a ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Analysis of the characteristics of coal samples reveals the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) by 2.78% and The Calorific Value (CV) of 3,648 cal/gr. Table 2 displays the full coal analysis results.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3,648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters				
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)
	AC	Decrease in AC (%)			
Starting Coal	36.72		2.78		3,648
CPO 10 mL	24.70	32.73	1.96	29.50	4,402
CPO 15 mL	22.84	37.80	1.68	39.57	4,670
CPO 20 mL	15.55	57.65	1.30	53.24	5,124
VCO 20 mL	9.77	73.39	1.79	35.61	5,037

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL. In Figure 1 below, the outcomes of the proximate analysis are displayed.

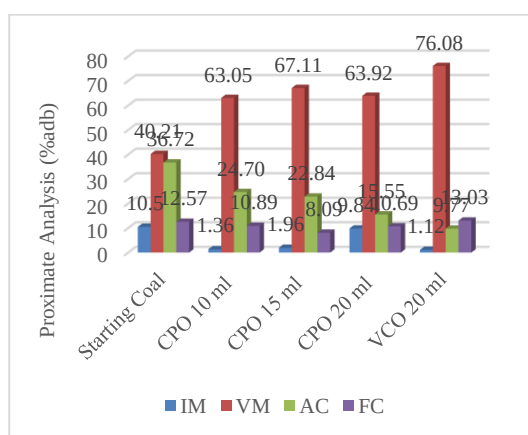


Figure 1. Comparison of proximate analysis after agglomeration process

Figure 1 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [19] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing the agglomeration process [20]. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 24.70%, 22.84%, 15.55% and 9.77%.

Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Since coal agglomerate particles are larger than mineral particles, they can be [21]. The fixed carbon value decreased by about 10.89% 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 2 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68% 1.30% and 1.79%. Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Coal agglomerate particles may be isolated from mineral particles because they are bigger [22].

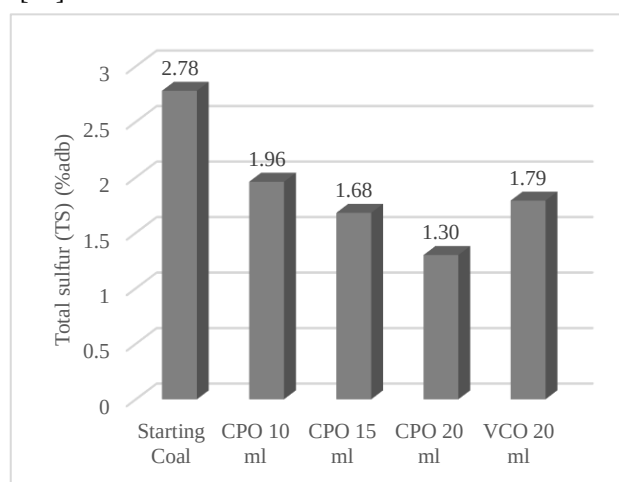


Figure 2. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 3 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89% 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [23].

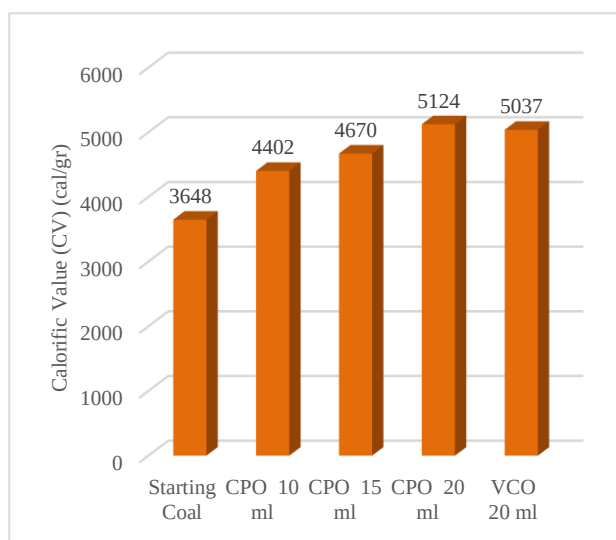


Figure 3. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV). It can be seen that the use of virgin coconut oil (VCO) in the agglomeration process is the optimum result obtained.

ACKNOWLEDGEMENTS

The faculty of industrial technology provided the writers with moral and financial support that allowed them to do this study and write an essay.

REFERENCES

- [1] Ministry of Energy and Mineral Resources, "Indonesia's Mineral & Coal Policy". Jakarta: Directorate General of Mineral and Coal, 2021a.
- [2] Ministry of Energy and Mineral Resources, "Road Map for Coal Development and Utilisation". Jakarta: Directorate General of Mineral and Coal, 2021b.
- [3] R. Prabowo and I. Prengki, "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using minyak jelantah", IOP Conference Series: Earth and Environmental Science, Vol. 413, No. 1, pp. 34-40, 2020.
- [4] C. Cerik and V. Arslan, "The Modelling Of Fine Coal Beneficiation With A Water-Only Cyclone", Gospodarka Surowcami Mineralnymi - Mineral Resources Management, Vol. 38, No. 3, pp. 137-150, Jul. 2023.
- [5] E. Sanwani, A. Ibrahim, A. Sudarsono, and I. Handayani, "Coal Washing", Bandung: Department of Mining Engineering, Bandung Institute of Technology, 1998.
- [6] R.G. Abaszade, A.G. Mammadov, V.O. Kotsyubynsky, E.Y. Gur, I.Y. Bayramov, E.A. Khanmamadova and O.A. Kapush, "Modeling Of Voltage-Ampere Characteristic Structures On The Basis Of Graphene Oxide/Sulfur Compounds", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 2, pp. 302-306, 2022.
- [7] A. Nelvi, A. Fadhly, J. A. Wardani, and H. Rahmi, "Optimisation of Calorific Value and Ash Content of Brown Coal Using Crude Lime-Palm Oil-Water Agglomeration Method", Mining Journal, Vol. 6, No. 4, pp. 178-183, Feb. 2023.
- [8] M. Özer, O. M. Basha, and B. Morsi, "Coal-Agglomeration Processes: A Review", International Journal of Coal Preparation and Utilization, Vol. 37, No. 3, pp. 131-167, May 2017.
- [9] Nukman and S. Poertadji, "Reduction of Ash and Sulphur Content in Sub Bituminous Coal by Palm Oil-Water Agglomeration Method", Indonesian Journal of Materials Science, Vol. 7, No. 3, pp. 31-36, 2006.
- [10] S. Wang and X. Tao, "Effect Of Surfactants On The Flotation Performance Of Low-Rank Coal By Particle Sliding Process Measurements", Mineral Resources Management, Vol. 34, No. 1, pp. 69-82, 2018.
- [11] M. Arifin, E. Sanwani, and S. K. Chaerun, "Removal Of Sulfur And Ash From Indonesian Coal By Indigenous Mixotrophic Bacteria", Current Research on Biosciences and Biotechnology, Vol. 1, No. 2, pp. 71-76, Feb. 2020.
- [12] S. R. Nurhawaisyah, E. Sanwani, S. K. Chaerun, and M. A. Rasyid, "Clean Coal Technology Using An Iron-And Sulfur-Oxidizing Mixotrophic Bacterium", IOP Conf Ser Mater Sci Eng, Vol. 478, No. 34, pp. 103-109, 2019.
- [13] ASTM D3173/D3173M-17a, "Standard Test Method For Moisture In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2017

- [14] ASTM D3175-18, “Standard Test Method For Volatile Matter In The Analysis Sample Of Coal And Coke”, ASTM International, West Conshohocken, PA, 2018.
- [15] ASTM D5142-09, “Standard Test Method For Fixed Carbon In The Analysis Sample Of Coal And Coke From Coal”, ASTM International, West Conshohocken, PA, 2009
- [16] ASTM D3174-12, “Standard Test Method For Ash In The Analysis Sample Of Coal And Coke From Coal”, ASTM International, West Conshohocken, PA, 2012.
- [17] ASTM D2492-02, “Standard Test Method For Sulfur In Coal”, ASTM International, West Conshohocken, PA, 2002.
- [18] ASTM D2015-00, “Standard Test Method For Gross Calorific Value Of Coal And Coke By The Adiabatic Bomb Calorimeter”, ASTM International, West Conshohocken, PA, 2000.
- [19] R. Pratama, Sufriadin, and S. Widodo, “Study Of Increasing The Calorific Value Of Coal Using Waste Cooking Oil”, IOP Conf Ser Earth Environ Sci, vol. 1134, No. 1, pp. 78-82, Jan. 2023.
- [20] M. Irsyad, A. Amrizal, M.D. Susila, A. Amrul and T.M. Fransisco, “Heat Transfer Characteristics Of Coconut Oil As Phase Change Materials In Freezing Process”, International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 1, pp. 29-33, 2022.
- [21] A. Aladin, “Empirical Modelling of Coal Desulphurisation by Flotation with Rayleigh Method”, Journal of Chemical Process Engineering, Vol. 5, No. 1, pp. 45–53, 2020.
- [22] A. Aladin, “Determination of the Optimum Ratio of CPO: Coal in Desulphurisation and Deashing by Continuous Flotation System”, Journal of Process Engineering, Vol. 3, No. 2, pp. 50–56, 2009.
- [23] N. M. N. W. H. H. Agung, “Relationship between total sulphur content and gross calorific value of coal PT. Carsurin Samarinda”, Journal of Mineral Technology, Vol. 7, No. 1, pp. 1–8, 2019.

BIOGRAPHIES



Name: Nurliah
Surname: Jafar
Birthday: 29.09.1984
Birthplace: Barru, Indonesia
Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2008

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2014

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2009

Research Interests: Exploration mining

Scientific Publications: 38 Research

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Muhammad

Middle Name: Idris

Surname: Juradi

Birthday: 12.02.1992

Birthplace: Malili, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 2014

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2017

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2016

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 22 Papers, 4 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Suriyanto

Surname: Bakri

Birthday: 19.11.1986

Birthplace: Sidrap, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2009

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2018

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2018

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 29 Papers, 3 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: **Lamatinulu**

Surname: **Lamatinulu**

Birthday: 08.06.1969

Birthplace: Palopo, Indonesia

Bachelor: Industrial Engineering and Management, Industrial Engineering Department, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Master: Industrial Management, Department of Industrial Engineering, Faculty of Industrial Technology, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia, 2002
Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Doctorate: Manufacturing Industrial Engineering, Mechanical Engineering Department, Faculty of Engineering, Brawijaya University, Malang, Indonesia, 2018

The Last Scientific Position: Prof., Department of Engineering Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2007

Research Interests: Operation Research, Performance Measurement, Product Development, Production Planning and Control

Scientific Publications: 30 Papers, 3 Books, 7 Copyrights, 5 Research Projects

Scientific Memberships: Indonesian Engineers Association, Indonesian Lecturer Association

4. Bukti konfirmasi review dan hasil review (27 Januari 2024)



Int Journal of IJTPE (IOTPE) <ijtp0@gmail.com>
to me ▾

Jan 27, 2024, 12:23 AM



Dear Author,

The revised paper is received and under review.



Best regards,

Editor-in-Chief of International Journal on
"Technical and Physical Problems of Engineering" (IJTPE)
ISSN 2077-3528
is supported by: International Organization of IOTPE
URL: www.iotpe.com
Email: ijtp0@iotpe.com , ijtp0@gmail.com

IOTPE is supporting: ICTPE Conference, IJTPE Journal, IETPE Enterprise



5. Bukti konfirmasi review (4 Februari 2024)



Int Journal of IJTPE (IJTPE) <ijtp0@gma... Feb 4, 2024, 1:50 AM



to me ▾

Dear Author,

Paper ID: 1826-240125

Please kindly revise your submitted paper considering the following Review Comments and resend it again for checking out.

REVIEW COMMENTS:

- Please send your paper according to the IJTPE journal format and the following review comments:

www.ijtp0.com/IJTPE/FormatOfPapers.html

- All used figures, tables and equations SHOULD BE addressed to the related ORIGINAL references by [] in the end of titles.

- (IMPORTANT) - Address all the used figures and tables from the related original references in text as well as the titles using [].

- Request PERMISSION to use the figures and tables from related resources.

- (IMPORTANT) - Address all the used equations from the related original references.

- If any figure/table/equation is used from a reference then write down the reference number inside [] at the end of the figure/table title and also at the end of the related paragraphs.

- Change the picture(s) resolution by the following setting in the paper.

Click File -> Options -> Advanced

Select:

Image Size and Quality

Default Resolution: High Fidelity

OK

6. Bukti konfirmasi submit revisi ketiga dan respon kepada reviewer serta artikel yang diresubmit (12 Februari 2024)



Muh. Idris Juradi <muhidris.juradi@umi....>
to Int ▾

Mon, Feb 12, 11:19 AM



Dear journal managers,

attached is our revised manuscript, please apologize for the delay.

Best regards,

Muhammad Idris Juradi

One attachment • Scanned by Gmail ⓘ



EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

N. Jafar¹ M.I. Juradi¹ S.Bakri¹ Lamatinulu²

1. Department of Mining Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, nurliah.jafar@umi.ac.id, muhidris.juradi@umi.ac.id, suriyanto.bakri@umi.ac.id,
2. Department of Industrial Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, Lamatinulu@gmail.com

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal. (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

Data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources indicate that Indonesia has a very large potential for coal resources., Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Beyond calorific value, ash (A) and sulphur (S) are contaminants and a measure of coal quality. Burning coal will produce sulphur (S) oxides due to its sulphur (S) concentration. [3]. This substance may react with atmospheric water vapour to produce H_2SO_3 and H_2SO_4 . Acid rain will happen if both acids are polluted in the atmosphere and descend with rains at the same time. Sulphur (S) oxides released from burning coal have the potential to produce acid rain hundreds of miles away. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Washing the coal reduces the amount of ash (A) and sulphur (S) from inorganic components; this process is known as the agglomeration technique [5]. The presence of sulfur will also affect the compounds present in coal so that it is necessary to reduce the sulfur content [6].

Ash (A) and sulphur (S) may be effectively removed from coal using the oil-water agglomeration method. Oil agglomeration can be used to create a solid, viscous product by combining coal particles of various sizes, or agglomerates [7]. Because the coal surface is hydrophobic (hates water) and lipophilic (loves oil), this agglomeration approach can be used. [8]. Waste material is submerged in the media, but clean coal floats in the same medium (water) [9].

Coal particles may be formed into agglomerates to create coal oil mixes since they are hydrophobic by nature [10]. However, the hydrophilic mineral particles that give coal its ash (A) and sulphur (S) are unaffected and stay in the water [11]. The coal agglomeration particles may be separated from the mineral particles because they are bigger. When oil is present during washing, water containing ash (A) will no longer stick to the coal surface [12]. This study is to examine the use of virgin coconut oil

and palm cooking oil on lowering ash (A), sulphur (S), and raising the calorific value (CV) of coal, as well as to ascertain the impact of oil volume variation.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1,000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24. The resulting agglomerate is then ovenised at 110°C for 2 hours.

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [13], volatile matter standard method ASTM D3175 [14], fixed carbon standard method ASTM D5142 [15], ash content with standard method used ASTM D3174 [16], total sulfur analysis ASTM D2492 [17] and calorific value with standard measurement ASTM D2015 [18]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1) [16], the equation for reducing sulfur content (equation 2) [17] and increasing calorific value (equation 3) [18] can be calculated using the equation:

$$\text{Decrease in AC (\%)} = \frac{(a_1 - a_2)}{a_2} \cdot 100\% \quad (1)$$

$$\text{Decrease in S (\%)} = \frac{(S_1 - S_2)}{S_2} \cdot 100\% \quad (2)$$

$$\text{Increase in CV (\%)} = \frac{(C_1 - C_2)}{C_1} \cdot 100\% \quad (3)$$

Table 1. Description of equations 1-3 [16, 17, 18]

No.	Description	Unit	Code
1	Ash content of coal samples	%	a ₁
2	Coal ash content after agglomeration process	%	a ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Analysis of the characteristics of coal samples reveals the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) by 2.78% and The Calorific Value (CV) of 3,648 cal/gr. Table 2 displays the full coal analysis results.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3,648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters				
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)
	AC	Decrease in AC (%)			
Starting Coal	36.72		2.78		3,648
CPO 10 mL	24.70	32.73	1.96	29.50	4,402
CPO 15 mL	22.84	37.80	1.68	39.57	4,670
CPO 20 mL	15.55	57.65	1.30	53.24	5,124
VCO 20 mL	9.77	73.39	1.79	35.61	5,037

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL. In Figure 1 below, the outcomes of the proximate analysis are displayed.

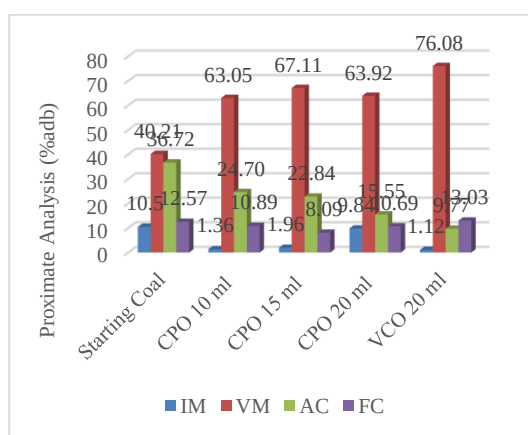


Figure 1. Comparison of proximate analysis after agglomeration process

Figure 1 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [19] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing the agglomeration process [20]. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 24.70%, 22.84%, 15.55% and 9.77%.

Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Since coal agglomerate particles are larger than mineral particles, they can be [21]. The fixed carbon value decreased by about 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 2 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68%, 1.30% and 1.79%. Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Coal agglomerate particles may be isolated from mineral particles because they are bigger [22].

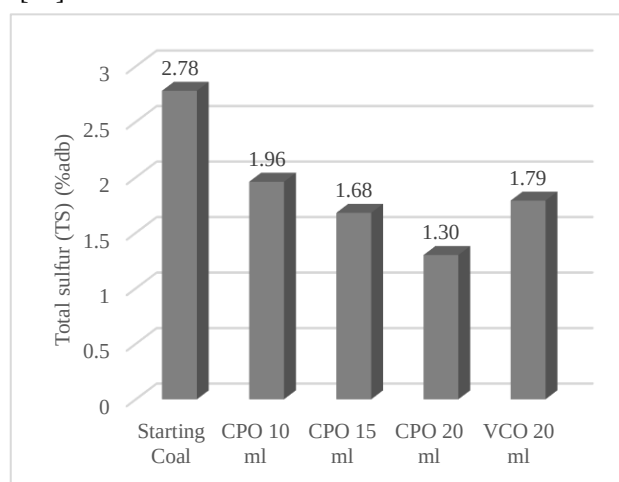


Figure 2. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 3 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89% 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [23].

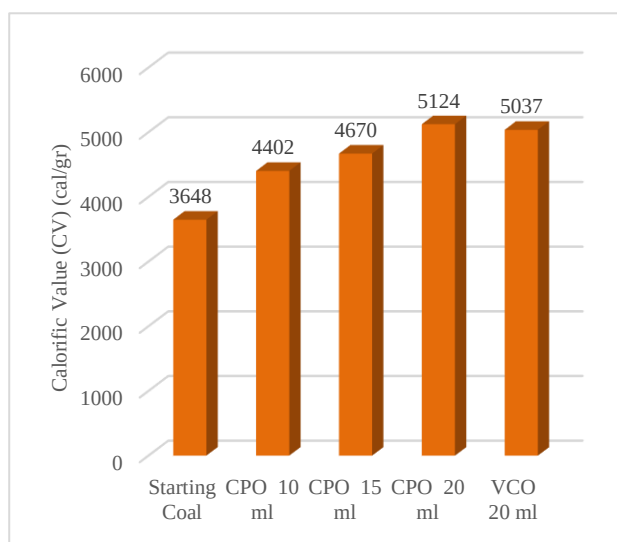


Figure 3. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV). It can be seen that the use of virgin coconut oil (VCO) in the agglomeration process is the optimum result obtained.

ACKNOWLEDGEMENTS

The faculty of industrial technology provided the writers with moral and financial support that allowed them to do this study and write an essay.

REFERENCES

- [1] Ministry of Energy and Mineral Resources, "Indonesia's Mineral & Coal Policy". Jakarta: Directorate General of Mineral and Coal, 2021a.
- [2] Ministry of Energy and Mineral Resources, "Road Map for Coal Development and Utilisation". Jakarta: Directorate General of Mineral and Coal, 2021b.
- [3] R. Prabowo and I. Prengki, "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using minyak jelantah", IOP Conference Series: Earth and Environmental Science, Vol. 413, No. 1, pp. 34-40, 2020.
- [4] C. Cerik and V. Arslan, "The Modelling Of Fine Coal Beneficiation With A Water-Only Cyclone", Gospodarka Surowcami Mineralnymi - Mineral Resources Management, Vol. 38, No. 3, pp. 137-150, Jul. 2023.
- [5] E. Sanwani, A. Ibrahim, A. Sudarsono, and I. Handayani, "Coal Washing", Bandung: Department of Mining Engineering, Bandung Institute of Technology, 1998.
- [6] R.G. Abaszade, A.G. Mammadov, V.O. Kotsyubynsky, E.Y. Gur, I.Y. Bayramov, E.A. Khanmamadova and O.A. Kapush, "Modeling Of Voltage-Ampere Characteristic Structures On The Basis Of Graphene Oxide/Sulfur Compounds", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 2, pp. 302-306, 2022.
- [7] A. Nelvi, A. Fadhly, J. A. Wardani, and H. Rahmi, "Optimisation of Calorific Value and Ash Content of Brown Coal Using Crude Lime-Palm Oil-Water Agglomeration Method", Mining Journal, Vol. 6, No. 4, pp. 178-183, Feb. 2023.
- [8] M. Özer, O. M. Basha, and B. Morsi, "Coal-Agglomeration Processes: A Review", International Journal of Coal Preparation and Utilization, Vol. 37, No. 3, pp. 131-167, May 2017.
- [9] Nukman and S. Poertadji, "Reduction of Ash and Sulphur Content in Sub Bituminous Coal by Palm Oil-Water Agglomeration Method", Indonesian Journal of Materials Science, Vol. 7, No. 3, pp. 31-36, 2006.
- [10] S. Wang and X. Tao, "Effect Of Surfactants On The Flotation Performance Of Low-Rank Coal By Particle Sliding Process Measurements", Mineral Resources Management, Vol. 34, No. 1, pp. 69-82, 2018.
- [11] M. Arifin, E. Sanwani, and S. K. Chaerun, "Removal Of Sulfur And Ash From Indonesian Coal By Indigenous Mixotrophic Bacteria", Current Research on Biosciences and Biotechnology, Vol. 1, No. 2, pp. 71-76, Feb. 2020.
- [12] S. R. Nurhawaisyah, E. Sanwani, S. K. Chaerun, and M. A. Rasyid, "Clean Coal Technology Using An Iron-And Sulfur-Oxidizing Mixotrophic Bacterium", IOP Conf Ser Mater Sci Eng, Vol. 478, No. 34, pp. 103-109, 2019.
- [13] ASTM D3173/D3173M-17a, "Standard Test Method For Moisture In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2017

- [14] ASTM D3175-18, "Standard Test Method For Volatile Matter In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2018.
- [15] ASTM D5142-09, "Standard Test Method For Fixed Carbon In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2009
- [16] ASTM D3174-12, "Standard Test Method For Ash In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2012.
- [17] ASTM D2492-02, "Standard Test Method For Sulfur In Coal", ASTM International, West Conshohocken, PA, 2002.
- [18] ASTM D2015-00, "Standard Test Method For Gross Calorific Value Of Coal And Coke By The Adiabatic Bomb Calorimeter", ASTM International, West Conshohocken, PA, 2000.
- [19] R. Pratama, Sufriadin, and S. Widodo, "Study Of Increasing The Calorific Value Of Coal Using Waste Cooking Oil", IOP Conf Ser Earth Environ Sci, vol. 1134, No. 1, pp. 78-82, Jan. 2023.
- [20] M. Irsyad, A. Amrizal, M.D. Susila, A. Amrul and T.M. Fransisco, "Heat Transfer Characteristics Of Coconut Oil As Phase Change Materials In Freezing Process", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 1, pp. 29-33, 2022.
- [21] A. Aladin, "Empirical Modelling of Coal Desulphurisation by Flotation with Rayleigh Method", Journal of Chemical Process Engineering, Vol. 5, No. 1, pp. 45-53, 2020.
- [22] A. Aladin, "Determination of the Optimum Ratio of CPO: Coal in Desulphurisation and Deashing by Continuous Flotation System", Journal of Process Engineering, Vol. 3, No. 2, pp. 50-56, 2009.
- [23] N. M. N. W. H. H. Agung, "Relationship between total sulphur content and gross calorific value of coal PT. Carsurin Samarinda", Journal of Mineral Technology, Vol. 7, No. 1, pp. 1-8, 2019.

BIOGRAPHIES



Name: Nurliah
Surname: Jafar
Birthday: 29.09.1984
Birthplace: Barru, Indonesia
Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2008

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2014

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2009

Research Interests: Exploration mining

Scientific Publications: 38 Research

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Muhammad

Middle Name: Idris

Surname: Juradi

Birthday: 12.02.1992

Birthplace: Malili, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 2014

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2017

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2016

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 22 Papers, 4 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Suriyanto

Surname: Bakri

Birthday: 19.11.1986

Birthplace: Sidrap, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2009

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2018

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2018

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 29 Papers, 3 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: **Lamatinulu**

Surname: **Lamatinulu**

Birthday: 08.06.1969

Birthplace: Palopo, Indonesia

Bachelor: Industrial Engineering and Management, Industrial Engineering Department, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Master: Industrial Management, Department of Industrial Engineering, Faculty of Industrial Technology, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia, 2002
Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Doctorate: Manufacturing Industrial Engineering, Mechanical Engineering Department, Faculty of Engineering, Brawijaya University, Malang, Indonesia, 2018

The Last Scientific Position: Prof., Department of Engineering Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2007

Research Interests: Operation Research, Performance Measurement, Product Development, Production Planning and Control

Scientific Publications: 30 Papers, 3 Books, 7 Copyrights, 5 Research Projects

Scientific Memberships: Indonesian Engineers Association, Indonesian Lecturer Association

7. Bukti konfirmasi review keempat (12 Februari 2024)



Int Journal of IJTPE (IOTPE) <ijtp0@gma... Mon, Feb 12, 7:47 PM
to me ▾



Dear Author,

Paper ID: 1826-240125

Please kindly revise your submitted paper considering the following Review Comments and resend it again for checking out.

REVIEW COMMENTS:

- Translate non-English phrases in English in reference 10.
- Complete information of references 13-18.

RC 2

Best regards,

Editor-in-Chief of International Journal on
"Technical and Physical Problems of Engineering" (IJTPE)
ISSN 2077-3528
is supported by: International Organization of IOTPE
URL: www.iotpe.com
Email: ijtp0@iotpe.com , ijtp0@gmail.com

IOTPE is supporting: ICTPE Conference, IJTPE Journal, IETPE Enterprise



Membership & Citation: www.iotpe.com

8. Bukti konfirmasi submit revisi ketiga dan respon kepada reviewer serta artikel yang diresubmit (13 Februari 2024)



EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

N. Jafar¹ M.I. Juradi¹ S.Bakri¹ Lamatinulu²

1. Department of Mining Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, nurliah.jafar@umi.ac.id, muhidris.juradi@umi.ac.id, suriyanto.bakri@umi.ac.id,
2. Department of Industrial Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, Lamatinulu@gmail.com

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal. (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

Data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources indicate that Indonesia has a very large potential for coal resources., Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Beyond calorific value, ash (A) and sulphur (S) are contaminants and a measure of coal quality. Burning coal will produce sulphur (S) oxides due to its sulphur (S) concentration. [3]. This substance may react with atmospheric water vapour to produce H_2SO_3 and H_2SO_4 . Acid rain will happen if both acids are polluted in the atmosphere and descend with rains at the same time. Sulphur (S) oxides released from burning coal have the potential to produce acid rain hundreds of miles away. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Washing the coal reduces the amount of ash (A) and sulphur (S) from inorganic components; this process is known as the agglomeration technique [5]. The presence of sulfur will also affect the compounds present in coal so that it is necessary to reduce the sulfur content [6].

Ash (A) and sulphur (S) may be effectively removed from coal using the oil-water agglomeration method. Oil agglomeration can be used to create a solid, viscous product by combining coal particles of various sizes, or agglomerates [7]. Because the coal surface is hydrophobic (hates water) and lipophilic (loves oil), this agglomeration approach can be used. [8]. Waste material is submerged in the media, but clean coal floats in the same medium (water) [9].

Coal particles may be formed into agglomerates to create coal oil mixes since they are hydrophobic by nature [10]. However, the hydrophilic mineral particles that give coal its ash (A) and sulphur (S) are unaffected and stay in the water [11]. The coal agglomeration particles may be separated from the mineral particles because they are bigger. When oil is present during washing, water containing ash (A) will no longer stick to the coal surface [12]. This study is to examine the use of virgin coconut oil

and palm cooking oil on lowering ash (A), sulphur (S), and raising the calorific value (CV) of coal, as well as to ascertain the impact of oil volume variation.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1,000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24. The resulting agglomerate is then ovenised at 110°C for 2 hours.

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [13], volatile matter standard method ASTM D3175 [14], fixed carbon standard method ASTM D5142 [15], ash content with standard method used ASTM D3174 [16], total sulfur analysis ASTM D2492 [17] and calorific value with standard measurement ASTM D2015 [18]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1) [16], the equation for reducing sulfur content (equation 2) [17] and increasing calorific value (equation 3) [18] can be calculated using the equation:

$$\text{Decrease in AC (\%)} = \frac{(a_1 - a_2)}{a_2} \cdot 100\% \quad (1)$$

$$\text{Decrease in S (\%)} = \frac{(S_1 - S_2)}{S_2} \cdot 100\% \quad (2)$$

$$\text{Increase in CV (\%)} = \frac{(C_1 - C_2)}{C_1} \cdot 100\% \quad (3)$$

Table 1. Description of equations 1-3 [16, 17, 18]

No.	Description	Unit	Code
1	Ash content of coal samples	%	a ₁
2	Coal ash content after agglomeration process	%	a ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Analysis of the characteristics of coal samples reveals the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) by 2.78% and The Calorific Value (CV) of 3,648 cal/gr. Table 2 displays the full coal analysis results.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3,648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters				
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)
	AC	Decrease in AC (%)			
Starting Coal	36.72		2.78		3,648
CPO 10 mL	24.70	32.73	1.96	29.50	4,402
CPO 15 mL	22.84	37.80	1.68	39.57	4,670
CPO 20 mL	15.55	57.65	1.30	53.24	5,124
VCO 20 mL	9.77	73.39	1.79	35.61	5,037

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL. In Figure 1 below, the outcomes of the proximate analysis are displayed.

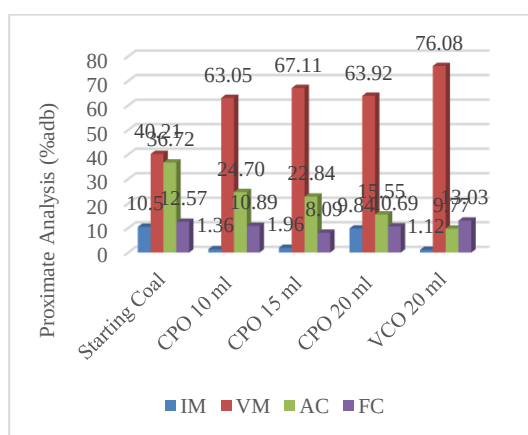


Figure 1. Comparison of proximate analysis after agglomeration process

Figure 1 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [19] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing the agglomeration process [20]. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 24.70%, 22.84%, 15.55% and 9.77%.

Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Since coal agglomerate particles are larger than mineral particles, they can be [21]. The fixed carbon value decreased by about 10.89% 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 2 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68% 1.30% and 1.79%. Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Coal agglomerate particles may be isolated from mineral particles because they are bigger [22].

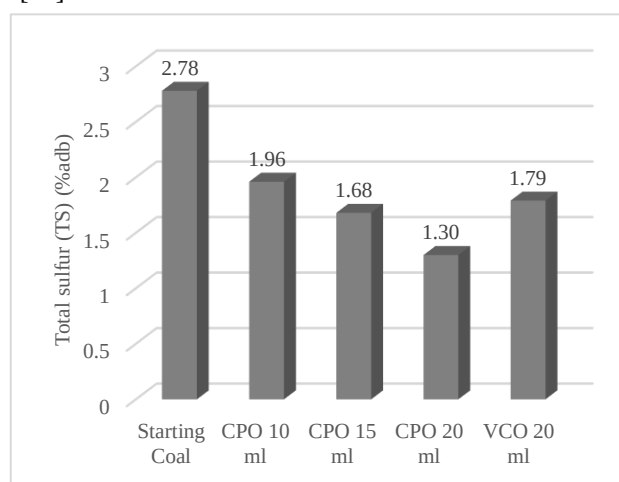


Figure 2. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 3 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89% 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [23].

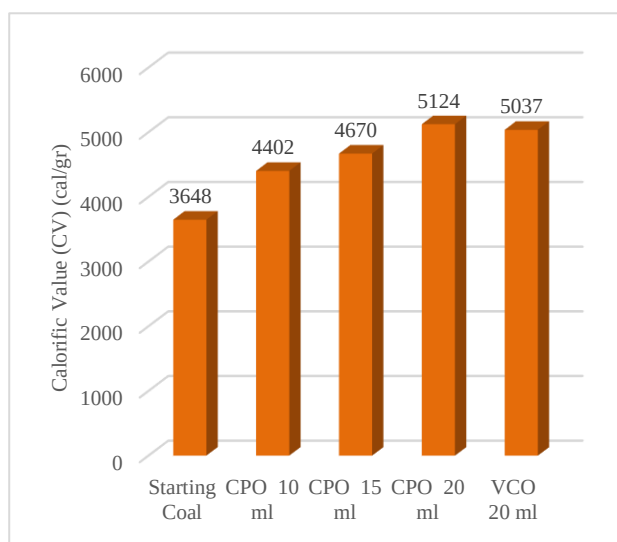


Figure 3. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV). It can be seen that the use of virgin coconut oil (VCO) in the agglomeration process is the optimum result obtained.

ACKNOWLEDGEMENTS

The faculty of industrial technology provided the writers with moral and financial support that allowed them to do this study and write an essay.

REFERENCES

- [1] Ministry of Energy and Mineral Resources, "Indonesia's Mineral & Coal Policy". Jakarta: Directorate General of Mineral and Coal, 2021a.
- [2] Ministry of Energy and Mineral Resources, "Road Map for Coal Development and Utilisation". Jakarta: Directorate General of Mineral and Coal, 2021b.
- [3] R. Prabowo and I. Prengki, "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using minyak jelantah", IOP Conference Series: Earth and Environmental Science, Vol. 413, No. 1, pp. 34-40, 2020.
- [4] C. Cerik and V. Arslan, "The Modelling Of Fine Coal Beneficiation With A Water-Only Cyclone", Gospodarka Surowcami Mineralnymi - Mineral Resources Management, Vol. 38, No. 3, pp. 137-150, Jul. 2023.
- [5] E. Sanwani, A. Ibrahim, A. Sudarsono, and I. Handayani, "Coal Washing", Bandung: Department of Mining Engineering, Bandung Institute of Technology, 1998.
- [6] R.G. Abaszade, A.G. Mammadov, V.O. Kotsyubynsky, E.Y. Gur, I.Y. Bayramov, E.A. Khanmamadova and O.A. Kapush, "Modeling Of Voltage-Ampere Characteristic Structures On The Basis Of Graphene Oxide/Sulfur Compounds", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 2, pp. 302-306, 2022.
- [7] A. Nelvi, A. Fadhly, J. A. Wardani, and H. Rahmi, "Optimisation of Calorific Value and Ash Content of Brown Coal Using Crude Lime-Palm Oil-Water Agglomeration Method", Mining Journal, Vol. 6, No. 4, pp. 178-183, Feb. 2023.
- [8] M. Özer, O. M. Basha, and B. Morsi, "Coal-Agglomeration Processes: A Review", International Journal of Coal Preparation and Utilization, Vol. 37, No. 3, pp. 131-167, May 2017.
- [9] Nukman and S. Poertadji, "Reduction of Ash and Sulphur Content in Sub Bituminous Coal by Palm Oil-Water Agglomeration Method", Indonesian Journal of Materials Science, Vol. 7, No. 3, pp. 31-36, 2006.
- [10] S. Wang and X. Tao, "Effect Of Surfactants On The Flotation Performance Of Low-Rank Coal By Particle Sliding Process Measurements", Mineral Resources Management, Vol. 34, No. 1, pp. 69-82, 2018.
- [11] M. Arifin, E. Sanwani, and S. K. Chaerun, "Removal Of Sulfur And Ash From Indonesian Coal By Indigenous Mixotrophic Bacteria", Current Research on Biosciences and Biotechnology, Vol. 1, No. 2, pp. 71-76, Feb. 2020.
- [12] S. R. Nurhawaisyah, E. Sanwani, S. K. Chaerun, and M. A. Rasyid, "Clean Coal Technology Using An Iron-And Sulfur-Oxidizing Mixotrophic Bacterium", IOP Conf Ser Mater Sci Eng, Vol. 478, No. 34, pp. 103-109, 2019.
- [13] ASTM D3173/D3173M-17a, "Standard Test Method For Moisture In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2017

- [14] ASTM D3175-18, "Standard Test Method For Volatile Matter In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2018.
- [15] ASTM D5142-09, "Standard Test Method For Fixed Carbon In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2009
- [16] ASTM D3174-12, "Standard Test Method For Ash In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2012.
- [17] ASTM D2492-02, "Standard Test Method For Sulfur In Coal", ASTM International, West Conshohocken, PA, 2002.
- [18] ASTM D2015-00, "Standard Test Method For Gross Calorific Value Of Coal And Coke By The Adiabatic Bomb Calorimeter", ASTM International, West Conshohocken, PA, 2000.
- [19] R. Pratama, Sufriadin, and S. Widodo, "Study Of Increasing The Calorific Value Of Coal Using Waste Cooking Oil", IOP Conf Ser Earth Environ Sci, vol. 1134, No. 1, pp. 78-82, Jan. 2023.
- [20] M. Irsyad, A. Amrizal, M.D. Susila, A. Amrul and T.M. Fransisco, "Heat Transfer Characteristics Of Coconut Oil As Phase Change Materials In Freezing Process", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 1, pp. 29-33, 2022.
- [21] A. Aladin, "Empirical Modelling of Coal Desulphurisation by Flotation with Rayleigh Method", Journal of Chemical Process Engineering, Vol. 5, No. 1, pp. 45-53, 2020.
- [22] A. Aladin, "Determination of the Optimum Ratio of CPO: Coal in Desulphurisation and Deashing by Continuous Flotation System", Journal of Process Engineering, Vol. 3, No. 2, pp. 50-56, 2009.
- [23] N. M. N. W. H. H. Agung, "Relationship between total sulphur content and gross calorific value of coal PT. Carsurin Samarinda", Journal of Mineral Technology, Vol. 7, No. 1, pp. 1-8, 2019.

BIOGRAPHIES



Name: Nurliah
Surname: Jafar
Birthday: 29.09.1984
Birthplace: Barru, Indonesia
Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2008

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2014

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2009

Research Interests: Exploration mining

Scientific Publications: 38 Research

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Muhammad

Middle Name: Idris

Surname: Juradi

Birthday: 12.02.1992

Birthplace: Malili, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 2014

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2017

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2016

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 22 Papers, 4 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Suriyanto

Surname: Bakri

Birthday: 19.11.1986

Birthplace: Sidrap, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2009

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2018

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2018

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 29 Papers, 3 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: **Lamatinulu**

Surname: **Lamatinulu**

Birthday: 08.06.1969

Birthplace: Palopo, Indonesia

Bachelor: Industrial Engineering and Management, Industrial Engineering Department, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Master: Industrial Management, Department of Industrial Engineering, Faculty of Industrial Technology, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia, 2002
Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Doctorate: Manufacturing Industrial Engineering, Mechanical Engineering Department, Faculty of Engineering, Brawijaya University, Malang, Indonesia, 2018

The Last Scientific Position: Prof., Department of Engineering Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2007

Research Interests: Operation Research, Performance Measurement, Product Development, Production Planning and Control

Scientific Publications: 30 Papers, 3 Books, 7 Copyrights, 5 Research Projects

Scientific Memberships: Indonesian Engineers Association, Indonesian Lecturer Association

9. Bukti konfirmasi manuscript accepted (13 Februari 2024)



Int Journal of IJTPE (IOTPE) <ijtp0@...>

Tue, Feb 13, 6:21 PM



to me ▾

Dear Author,

The submitted paper will be reserved for the journal issue at the End of SEPTEMBER 2024, after final review and receiving signed copyright form and also receipt of journal fee (Paper Processing Charge).

The Journal Editorial Board has the right to change the publishing schedule of the accepted paper(s) in the earlier or later issue(s) of the journal based on the publishing planning and limitations.

1. Please print out and sign the attached Copyright Form by hand and send the scanned file back to us.

Do not forget to fill in the name and surname of the corresponding author as well as the information of the extended paper published before in another conference or journal.

Digital signature used in the copyright form is not accepted.

2. The indexing databases may index the published papers according to their methods and schedules and the IJTPE Journal does not control the indexing processes of the published papers on the indexing databases. Therefore, the Author(s) has(ve) not any right to claim in this regard.

- The reviewed and accepted papers are just published in the IJTPE Journal according to the Author(s)' submission, request and transferring the Journal Fee.

- The Journal Editorial Board has the right to change the publishing schedule of the accepted paper(s) in the earlier or later issue(s) of the journal based on the publishing planning and limitations.

- The Journal Editorial Board has the right to change the title and contents of the accepted paper(s) before/after the publishing process based on its rules and strategies.

- Violation of any part of the Agreement by the Author(s) will cause the publication of the submitted paper in the IJTPE Journal to be CANCELLED.

3. Please also transfer the Journal Fee (Paper Processing Charge) and send the receipt.

<http://www.iotpe.com/IJTPE/JournalFees.html>

- The **Journal Fee** is considered by the Editorial Board to cover the communication, reviewing, editing and publication processes of the submitted papers and **it is not refundable**.

- The author(s) has(ve) no claim to refund the Journal Fee after transferring.

- The author(s) **agree** to consider any **extra payment** during the Journal Fee transactions as the **Grant** to the journal process, because returning the extra payment is more expensive.

The journal fee (**350 Euro**, *excluding transaction Transfer expenses*) is transferred to the following bank account and the receipt of transaction is also submitted:

Bank: OJSC "XALQ" Bank, Baku, Azerbaijan

Beneficiary Name: Ramiz Aziz Iskandarov

Beneficiary TIN: 1007622462

IBAN: AZ25HAJCSCEUR10010092177001

SWIFT/BIC: HAJCAZ22

4. The author(s) can also transfer the journal fee just via online service such as **WISE / REVOLUT** Money Transfer (*about 20 Euro is the expense of transactions in WISE method*).

10. Bukti konfirmasi manuscript published online (27 September 2024)



Int Journal of IJTPE (IOTPE)

Fri, Sep 27, 6:09 PM (12 days ago)



to bcc: me ▾

27.09.2024

International Journal on "Technical and Physical Problems of Engineering" (IJTPE)

IJTPE - Issue 60, Volume 16, Number 3, September 2024 (Serial No: 0060-1603-0924)

Dear Author(s),

Please kindly find your accepted and published paper in International Journal on "Technical and Physical Problems of Engineering" (IJTPE) (www.iotpe.com) via the following links:

<https://www.iotpe.com/IJTPE/IJTPE-2024/IJTPE-2024.html>

IJTPE - Issue 60, Volume 16, Number 3, September 2024 (Serial No: 0060-1603-0924)

International Journal of IJTPE is a multidisciplinary peer-reviewed journal published quarterly and electronically by International Organization on "Technical and Physical Problems of Engineering" (IOTPE) that is dedicated to promoting research in theoretical themes, physical subjects and technical problems of Science, Technology and Engineering.

The IJTPE Journal is registered, cited and indexed in some scientific organization and databases such as [Elsevier-Scopus](#) considering the following link:

<http://www.iotpe.com/IJTPE/JournalCitations.html>

Warmest regards,

**1. Bukti konfirmasi submit artikel dan artikel yang
disubmit (24 Januari 2024)**

Submission manuscript Muhammad Idris Juradi External Inbox x



Muh. Idris Juradi <muhidris.juradi@umi.ac.id>
to ijtp, ijtp0

Jan 24, 2024, 5:31 PM

Dear journal managers,

Attached is our manuscript article with the title "EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT" Author M.I. Juradi, S.Bakri, Lamatinulu.

We hope that our manuscript will soon be processed further.

Best regards

Muhammad Idris Juradi

One attachment • Scanned by Gmail



EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

N. Jafar¹ M.I. Juradi¹ S.Bakri¹ Lamatinulu²

1. Department of Mining Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, nurliah.jafar@umi.ac.id, muhidris.juradi@umi.ac.id, suriyanto.bakri@umi.ac.id,
2. Department of Industrial Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, Lamatinulu@gmail.com

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal. (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

Data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources indicate that Indonesia has a very large potential for coal resources., Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Beyond calorific value, ash (A) and sulphur (S) are contaminants and a measure of coal quality. Burning coal will produce sulphur (S) oxides due to its sulphur (S) concentration. [3]. This substance may react with atmospheric water vapour to produce H_2SO_3 and H_2SO_4 . Acid rain will happen if both acids are polluted in the atmosphere and descend with rains at the same time. Sulphur (S) oxides released from burning coal have the potential to produce acid rain hundreds of miles away. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Washing the coal reduces the amount of ash (A) and sulphur (S) from inorganic components; this process is known as the agglomeration technique [5]. The presence of sulfur will also affect the compounds present in coal so that it is necessary to reduce the sulfur content [6].

Ash (A) and sulphur (S) may be effectively removed from coal using the oil-water agglomeration method. Oil agglomeration can be used to create a solid, viscous product by combining coal particles of various sizes, or agglomerates [7]. Because the coal surface is hydrophobic (hates water) and lipophilic (loves oil), this agglomeration approach can be used. [8]. Waste material is submerged in the media, but clean coal floats in the same medium (water) [9].

Coal particles may be formed into agglomerates to create coal oil mixes since they are hydrophobic by nature [10]. However, the hydrophilic mineral particles that give coal its ash (A) and sulphur (S) are unaffected and stay in the water [11]. The coal agglomeration particles may be separated from the mineral particles because they are bigger. When oil is present during washing, water containing ash (A) will no longer stick to the coal surface [12]. This study is to examine the use of virgin coconut oil

and palm cooking oil on lowering ash (A), sulphur (S), and raising the calorific value (CV) of coal, as well as to ascertain the impact of oil volume variation.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1,000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24. The resulting agglomerate is then ovenised at 110°C for 2 hours.

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [13], volatile matter standard method ASTM D3175 [14], fixed carbon standard method ASTM D5142 [15], ash content with standard method used ASTM D3174 [16], total sulfur analysis ASTM D2492 [17] and calorific value with standard measurement ASTM D2015 [18]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1) [16], the equation for reducing sulfur content (equation 2) [17] and increasing calorific value (equation 3) [18] can be calculated using the equation:

$$\text{Decrease in AC (\%)} = \frac{(a_1 - a_2)}{a_2} \cdot 100\% \quad (1)$$

$$\text{Decrease in S (\%)} = \frac{(S_1 - S_2)}{S_2} \cdot 100\% \quad (2)$$

$$\text{Increase in CV (\%)} = \frac{(C_1 - C_2)}{C_1} \cdot 100\% \quad (3)$$

Table 1. Description of equations 1-3 [16, 17, 18]

No.	Description	Unit	Code
1	Ash content of coal samples	%	a ₁
2	Coal ash content after agglomeration process	%	a ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Analysis of the characteristics of coal samples reveals the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) by 2.78% and The Calorific Value (CV) of 3,648 cal/gr. Table 2 displays the full coal analysis results.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3,648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters				
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)
	AC	Decrease in AC (%)			
Starting Coal	36.72		2.78		3,648
CPO 10 mL	24.70	32.73	1.96	29.50	4,402
CPO 15 mL	22.84	37.80	1.68	39.57	4,670
CPO 20 mL	15.55	57.65	1.30	53.24	5,124
VCO 20 mL	9.77	73.39	1.79	35.61	5,037

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL. In Figure 1 below, the outcomes of the proximate analysis are displayed.

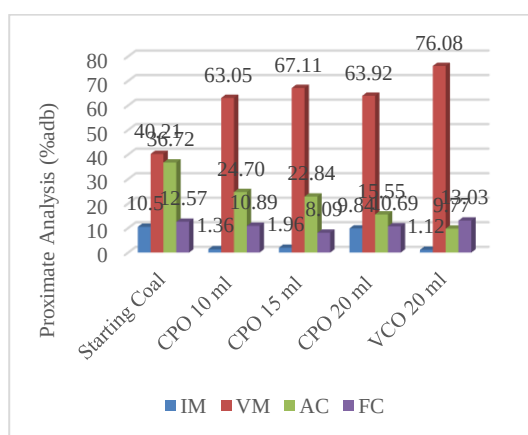


Figure 1. Comparison of proximate analysis after agglomeration process

Figure 1 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [19] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing the agglomeration process [20]. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 24.70%, 22.84%, 15.55% and 9.77%.

Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Since coal agglomerate particles are larger than mineral particles, they can be [21]. The fixed carbon value decreased by about 10.89% 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 2 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68% 1.30% and 1.79%. Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Coal agglomerate particles may be isolated from mineral particles because they are bigger [22].

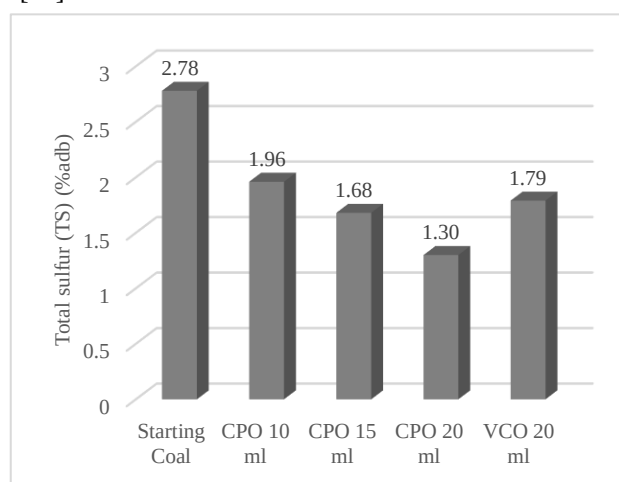


Figure 2. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 3 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89% 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [23].

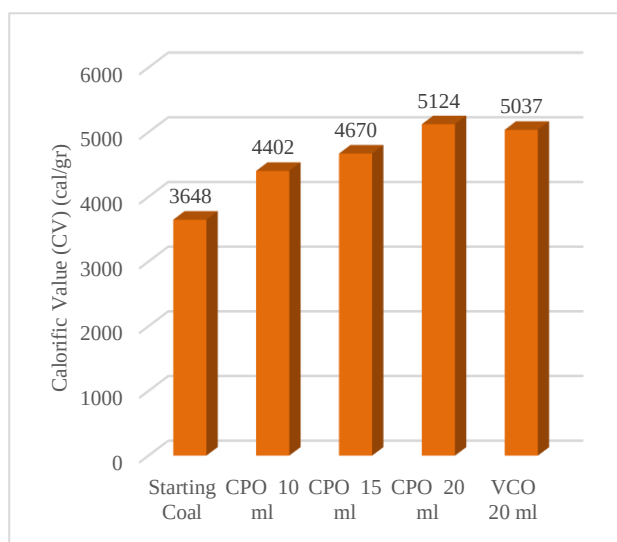


Figure 3. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV). It can be seen that the use of virgin coconut oil (VCO) in the agglomeration process is the optimum result obtained.

ACKNOWLEDGEMENTS

The faculty of industrial technology provided the writers with moral and financial support that allowed them to do this study and write an essay.

REFERENCES

- [1] Ministry of Energy and Mineral Resources, "Indonesia's Mineral & Coal Policy". Jakarta: Directorate General of Mineral and Coal, 2021a.
- [2] Ministry of Energy and Mineral Resources, "Road Map for Coal Development and Utilisation". Jakarta: Directorate General of Mineral and Coal, 2021b.
- [3] R. Prabowo and I. Prengki, "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using minyak jelantah", IOP Conference Series: Earth and Environmental Science, Vol. 413, No. 1, pp. 34-40, 2020.
- [4] C. Cerik and V. Arslan, "The Modelling Of Fine Coal Beneficiation With A Water-Only Cyclone", Gospodarka Surowcami Mineralnymi - Mineral Resources Management, Vol. 38, No. 3, pp. 137-150, Jul. 2023.
- [5] E. Sanwani, A. Ibrahim, A. Sudarsono, and I. Handayani, "Coal Washing", Bandung: Department of Mining Engineering, Bandung Institute of Technology, 1998.
- [6] R.G. Abaszade, A.G. Mammadov, V.O. Kotsyubynsky, E.Y. Gur, I.Y. Bayramov, E.A. Khanmamadova and O.A. Kapush, "Modeling Of Voltage-Ampere Characteristic Structures On The Basis Of Graphene Oxide/Sulfur Compounds", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 2, pp. 302-306, 2022.
- [7] A. Nelvi, A. Fadhly, J. A. Wardani, and H. Rahmi, "Optimisation of Calorific Value and Ash Content of Brown Coal Using Crude Lime-Palm Oil-Water Agglomeration Method", Mining Journal, Vol. 6, No. 4, pp. 178-183, Feb. 2023.
- [8] M. Özer, O. M. Basha, and B. Morsi, "Coal-Agglomeration Processes: A Review", International Journal of Coal Preparation and Utilization, Vol. 37, No. 3, pp. 131-167, May 2017.
- [9] Nukman and S. Poertadji, "Reduction of Ash and Sulphur Content in Sub Bituminous Coal by Palm Oil-Water Agglomeration Method", Indonesian Journal of Materials Science, Vol. 7, No. 3, pp. 31-36, 2006.
- [10] S. Wang and X. Tao, "Effect Of Surfactants On The Flotation Performance Of Low-Rank Coal By Particle Sliding Process Measurements", Mineral Resources Management, Vol. 34, No. 1, pp. 69-82, 2018.
- [11] M. Arifin, E. Sanwani, and S. K. Chaerun, "Removal Of Sulfur And Ash From Indonesian Coal By Indigenous Mixotrophic Bacteria", Current Research on Biosciences and Biotechnology, Vol. 1, No. 2, pp. 71-76, Feb. 2020.
- [12] S. R. Nurhawaisyah, E. Sanwani, S. K. Chaerun, and M. A. Rasyid, "Clean Coal Technology Using An Iron-And Sulfur-Oxidizing Mixotrophic Bacterium", IOP Conf Ser Mater Sci Eng, Vol. 478, No. 34, pp. 103-109, 2019.
- [13] ASTM D3173/D3173M-17a, "Standard Test Method For Moisture In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2017

- [14] ASTM D3175-18, "Standard Test Method For Volatile Matter In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2018.
- [15] ASTM D5142-09, "Standard Test Method For Fixed Carbon In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2009
- [16] ASTM D3174-12, "Standard Test Method For Ash In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2012.
- [17] ASTM D2492-02, "Standard Test Method For Sulfur In Coal", ASTM International, West Conshohocken, PA, 2002.
- [18] ASTM D2015-00, "Standard Test Method For Gross Calorific Value Of Coal And Coke By The Adiabatic Bomb Calorimeter", ASTM International, West Conshohocken, PA, 2000.
- [19] R. Pratama, Sufriadin, and S. Widodo, "Study Of Increasing The Calorific Value Of Coal Using Waste Cooking Oil", IOP Conf Ser Earth Environ Sci, vol. 1134, No. 1, pp. 78-82, Jan. 2023.
- [20] M. Irsyad, A. Amrizal, M.D. Susila, A. Amrul and T.M. Fransisco, "Heat Transfer Characteristics Of Coconut Oil As Phase Change Materials In Freezing Process", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 1, pp. 29-33, 2022.
- [21] A. Aladin, "Empirical Modelling of Coal Desulphurisation by Flotation with Rayleigh Method", Journal of Chemical Process Engineering, Vol. 5, No. 1, pp. 45-53, 2020.
- [22] A. Aladin, "Determination of the Optimum Ratio of CPO: Coal in Desulphurisation and Deashing by Continuous Flotation System", Journal of Process Engineering, Vol. 3, No. 2, pp. 50-56, 2009.
- [23] N. M. N. W. H. H. Agung, "Relationship between total sulphur content and gross calorific value of coal PT. Carsurin Samarinda", Journal of Mineral Technology, Vol. 7, No. 1, pp. 1-8, 2019.

BIOGRAPHIES



Name: Nurliah
Surname: Jafar
Birthday: 29.09.1984
Birthplace: Barru, Indonesia
Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2008

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2014

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2009

Research Interests: Exploration mining

Scientific Publications: 38 Research

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Muhammad

Middle Name: Idris

Surname: Juradi

Birthday: 12.02.1992

Birthplace: Malili, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 2014

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2017

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2016

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 22 Papers, 4 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Suriyanto

Surname: Bakri

Birthday: 19.11.1986

Birthplace: Sidrap, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2009

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2018

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2018

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 29 Papers, 3 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: **Lamatinulu**

Surname: **Lamatinulu**

Birthday: 08.06.1969

Birthplace: Palopo, Indonesia

Bachelor: Industrial Engineering and Management, Industrial Engineering Department, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Master: Industrial Management, Department of Industrial Engineering, Faculty of Industrial Technology, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia, 2002
Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Doctorate: Manufacturing Industrial Engineering, Mechanical Engineering Department, Faculty of Engineering, Brawijaya University, Malang, Indonesia, 2018

The Last Scientific Position: Prof., Department of Engineering Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2007

Research Interests: Operation Research, Performance Measurement, Product Development, Production Planning and Control

Scientific Publications: 30 Papers, 3 Books, 7 Copyrights, 5 Research Projects

Scientific Memberships: Indonesian Engineers Association, Indonesian Lecturer Association

2. Bukti Konfirmasi review dan hasil review pertama (25 Januari 2024)



Int Journal of IJTPE (IJTPE) <ijtp0@gmail.com>

to me ▾

Jan 25, 2024, 6:53 PM



Dear Author,

SIR = 14%

- **REDUCE THE SIMILAR PARTS (SIR) AND CONTENTS UNDER 5%**

Please note to the following comments to proceed your submitted paper in the IJTPE journal:

- **You are advised to change/improve and rephrase the colored paragraphs/sentences to your own phrases, contribution and research.**

- Review very carefully your revised paper that the colored paragraphs /sentences to be totally changed/improved.

- Publish the Similarity Index Reports (SIR) and trusted plagiarism of the revised paper using available services (e.g. www.ithenticate.com) and try to reach **SIR<5%**

- The result of plagiarism services should completely report the similarities percentage and address them.

- Send the **revised paper** in the IJTPE format AND the **SIR** to be checked out by the journal review system (It is necessary to receive the submitted papers + SIR from the authors every time.)

One attachment • Scanned by Gmail ⓘ



1826-240125-SIR.docx

EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

In Indonesia, the potential for coal resources is very abundant, according to data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources, Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Ash (A) and sulfur (S) are impurities and one of the parameters of coal quality besides calorific value. The sulfur (S) content in coal, when burnt, will turn into sulfur (S) oxides [3]. This compound can react with water vapour in the air to form H_2SO_3 and H_2SO_4 . If both acids are contaminated in the air and fall together with rainwater, acid rain will occur. The release of sulfur (S) oxides from burning coal can cause acid rain for hundreds of kilometres. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Ash (A) and sulfur (S) from inorganic materials in coal can be reduced by washing the coal, and this method is called the agglomeration method [5].

The oil-water agglomeration method is an effective technique for removing ash (A) and sulfur (S) from coal, agglomeration can be used to produce a solid, viscous product combined from different sizes of coal particles, referred to as agglomerates [6]. This agglomeration method can be applied due to the lipophilic (oil loving) and hydrophobic (water hating) nature of the coal surface [7]. Material that sinks in the media is waste material, while material that floats in the same media (water) is clean coal [8].

As coal particles are hydrophobic in nature, they can be made into agglomerates in the form of coal oil blends [9]. On the other hand, hydrophilic mineral particles which are the source of ash (A) and sulfur (S) in coal are not affected and remain in the water [10]. Since the coal agglomerate particles are larger than the mineral particles, they can be separated, with the presence of oil during washing resulting in water mixed with ash (A) will no longer adhere to the coal surface [11]. This study aims to determine the effect of oil volume variation and compare the use of palm cooking oil and virgin coconut oil

reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24 hours as seen in Figure 1. The resulting agglomerate is then ovenised at 110°C for 2 hours, until only inherent moisture remains in the coal pores as seen in Figure 2.



Figure 1. Agglomerate screening for 24 hours



Figure 2. Sample that has been in the oven

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [12], volatile matter standard method ASTM D3175 [13], fixed carbon standard method ASTM D5142 [14], ash content with standard method used ASTM D3174 [15], total sulfur analysis ASTM D2492 [16] and calorific value with standard measurement ASTM D2015 [17]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1), the equation for reducing sulfur content (equation 2) and increasing calorific value (equation 3) can be calculated using the equation:

$$\text{Decrease in Ash Content (\%)} = \frac{(A1-A2)}{A2} \times 100\% \quad (1)$$

$$\text{Decrease in total sulfur (\%)} = \frac{S1-S2}{S2} \times 100\% \quad (2)$$

$$\text{Increase in calorific value (\%)} = \frac{C1-C2}{C1} \times 100\% \quad (3)$$

Table 1. Description of equations 1-3

No.	Description	Unit	Code
1	Ash content of coal samples	%	A ₁
2	Coal ash content after agglomeration process	%	A ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Coal samples parameters analysis shows the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) 2.78% and The Calorific Value (CV) of 3648 cal/gr. The detailed result of coal analyses are shown in Table 2.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters					
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)	Increase in CV (%)
	AC	Decrease in AC (%)				
Starting Coal	36,72		2,78		3.648	
CPO 10 mL	24,70	32,73	1,96	29,50	4.402	20,67
CPO 15 mL	22,84	37,80	1,68	39,57	4.670	28,02
CPO 20 mL	15,55	57,65	1,30	53,24	5.124	40,46
VCO 20 mL	9,77	73,39	1,79	35,61	5.037	38,08

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL on the results of proximate analysis can be seen in Figure 3 below.

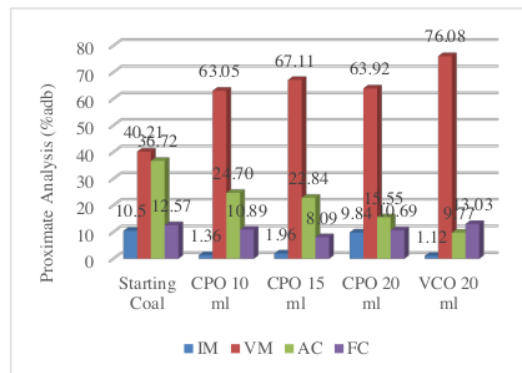


Figure 3. Comparison of proximate analysis after agglomeration process

Figure 3 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [18] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing process. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 21.0%, 22.84%, 15.55% and 9.77%.

Because coal particles are hydrophobic by nature, they can be made into agglomerates in the form of coal-oil blends. On the other hand, hydrophilic mineral particles (which are the source of ash (A) and sulfur (S) content in coal) are not affected and remain in the water. Since coal agglomerate particles are larger than mineral particles, they can be [19]. The fixed carbon value decreased by about 10.89%, 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 4 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68%, 1.30% and 1.79%. Because coal particles are hydrophobic by nature, they can be made into agglomerates in the form of coal-oil blends. On the other hand, hydrophilic mineral particles (which are the source of ash (A) and sulfur (S) content in coal) are not affected and remain in the water. Since coal agglomerate particles are larger than mineral particles, they can be separated [20].

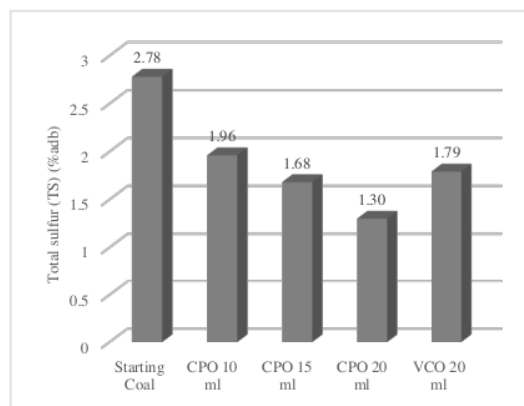


Figure 4. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 5 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89%, 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [21].

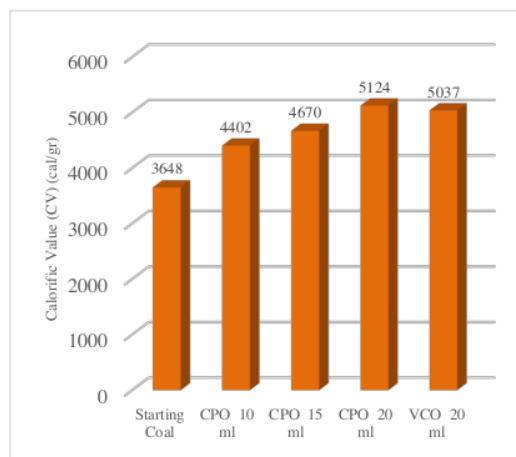


Figure 5. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV)

8

ACKNOWLEDGEMENTS

The authors are grateful to the faculty of industrial technology for financial and moral assistance so that this research can be carried out and produce an article.

14%

SIMILARITY INDEX

PRIMARY SOURCES

- 1

H Prabowo, I Prengki. "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using "minyak jelantah"", IOP Conference Series: Earth and Environmental Science, 2020
Crossref

270 words — 10%
- 2

R Pratama, Sufriadin, S Widodo. "Study of increasing the calorific value of coal using waste cooking oil", IOP Conference Series: Earth and Environmental Science, 2023
Crossref

40 words — 1%
- 3

[mafiadoc.com](#)
Internet

24 words — 1%
- 4

[doaj.org](#)
Internet

17 words — 1%
- 5

Edwin Akhdiat Daranin, Datin Fatia Umar, Gunawan, Nendaryono, Z. Zulfahmi, Truman Wijaya, Liston Setiawan. "Preliminary study of the methanol production process from coal to support the coal downstream program", IOP Conference Series: Earth and Environmental Science, 2023
Crossref

13 words — < 1%
- 6

[etheses.uin-malang.ac.id](#)
Internet

12 words — < 1%

7

4youkebab.pl
Internet

10 words — < 1%

8

D Triardianto, N Bintoro. "The Effect of Gaseous Ozone Exposure and Storage Room Temperatures on Ethylene Production, Peel Colour, and Total Soluble Solid Content of Banana Fruit (*Musa acuminata*) During Storage", IOP Conference Series: Earth and Environmental Science, 2021
Crossref

9 words — < 1%

EXCLUDE QUOTES OFF
EXCLUDE BIBLIOGRAPHY OFF

EXCLUDE SOURCES OFF
EXCLUDE MATCHES OFF

**3. Bukti konfirmasi submit revisi pertama, respon
kepada reviewer dan artikel di resubmit (26 Januari
2024)**



Muh. Idris Juradi <muhidris.juradi@umi.ac.id>
to Int ▾

Jan 26, 2024, 9:31AM ☆ ↶ ⋮

Dear journal managers,

Please find below the revised manuscript that we have paraphrased.

Best regards,

Muhammad Idris Juradi

One attachment • Scanned by Gmail ⓘ



EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

N. Jafar¹ M.I. Juradi¹ S.Bakri¹ Lamatinulu²

1. Department of Mining Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, nurliah.jafar@umi.ac.id, muhidris.juradi@umi.ac.id, suriyanto.bakri@umi.ac.id,
2. Department of Industrial Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, Lamatinulu@gmail.com

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal. (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

Data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources indicate that Indonesia has a very large potential for coal resources., Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Beyond calorific value, ash (A) and sulphur (S) are contaminants and a measure of coal quality. Burning coal will produce sulphur (S) oxides due to its sulphur (S) concentration. [3]. This substance may react with atmospheric water vapour to produce H_2SO_3 and H_2SO_4 . Acid rain will happen if both acids are polluted in the atmosphere and descend with rains at the same time. Sulphur (S) oxides released from burning coal have the potential to produce acid rain hundreds of miles away. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Washing the coal reduces the amount of ash (A) and sulphur (S) from inorganic components; this process is known as the agglomeration technique [5]. The presence of sulfur will also affect the compounds present in coal so that it is necessary to reduce the sulfur content [6].

Ash (A) and sulphur (S) may be effectively removed from coal using the oil-water agglomeration method. Oil agglomeration can be used to create a solid, viscous product by combining coal particles of various sizes, or agglomerates [7]. Because the coal surface is hydrophobic (hates water) and lipophilic (loves oil), this agglomeration approach can be used. [8]. Waste material is submerged in the media, but clean coal floats in the same medium (water) [9].

Coal particles may be formed into agglomerates to create coal oil mixes since they are hydrophobic by nature [10]. However, the hydrophilic mineral particles that give coal its ash (A) and sulphur (S) are unaffected and stay in the water [11]. The coal agglomeration particles may be separated from the mineral particles because they are bigger. When oil is present during washing, water containing ash (A) will no longer stick to the coal surface [12]. This study is to examine the use of virgin coconut oil

and palm cooking oil on lowering ash (A), sulphur (S), and raising the calorific value (CV) of coal, as well as to ascertain the impact of oil volume variation.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1,000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24. The resulting agglomerate is then ovenised at 110°C for 2 hours.

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [13], volatile matter standard method ASTM D3175 [14], fixed carbon standard method ASTM D5142 [15], ash content with standard method used ASTM D3174 [16], total sulfur analysis ASTM D2492 [17] and calorific value with standard measurement ASTM D2015 [18]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1) [16], the equation for reducing sulfur content (equation 2) [17] and increasing calorific value (equation 3) [18] can be calculated using the equation:

$$\text{Decrease in AC (\%)} = \frac{(a_1 - a_2)}{a_2} \cdot 100\% \quad (1)$$

$$\text{Decrease in S (\%)} = \frac{(S_1 - S_2)}{S_2} \cdot 100\% \quad (2)$$

$$\text{Increase in CV (\%)} = \frac{(C_1 - C_2)}{C_1} \cdot 100\% \quad (3)$$

Table 1. Description of equations 1-3 [16, 17, 18]

No.	Description	Unit	Code
1	Ash content of coal samples	%	a ₁
2	Coal ash content after agglomeration process	%	a ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Analysis of the characteristics of coal samples reveals the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) by 2.78% and The Calorific Value (CV) of 3,648 cal/gr. Table 2 displays the full coal analysis results.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3,648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters				
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)
	AC	Decrease in AC (%)			
Starting Coal	36.72		2.78		3,648
CPO 10 mL	24.70	32.73	1.96	29.50	4,402
CPO 15 mL	22.84	37.80	1.68	39.57	4,670
CPO 20 mL	15.55	57.65	1.30	53.24	5,124
VCO 20 mL	9.77	73.39	1.79	35.61	5,037

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL. In Figure 1 below, the outcomes of the proximate analysis are displayed.

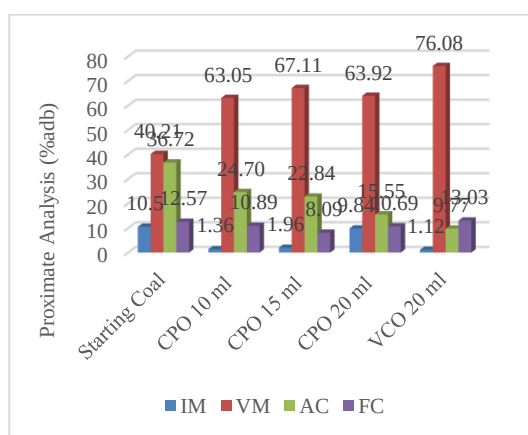


Figure 1. Comparison of proximate analysis after agglomeration process

Figure 1 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [19] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing the agglomeration process [20]. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 24.70%, 22.84%, 15.55% and 9.77%.

Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Since coal agglomerate particles are larger than mineral particles, they can be [21]. The fixed carbon value decreased by about 10.89% 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 2 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68% 1.30% and 1.79%. Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Coal agglomerate particles may be isolated from mineral particles because they are bigger [22].

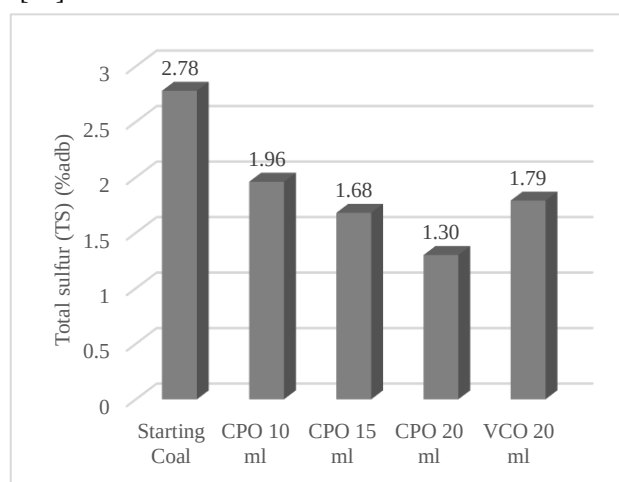


Figure 2. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 3 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89% 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [23].

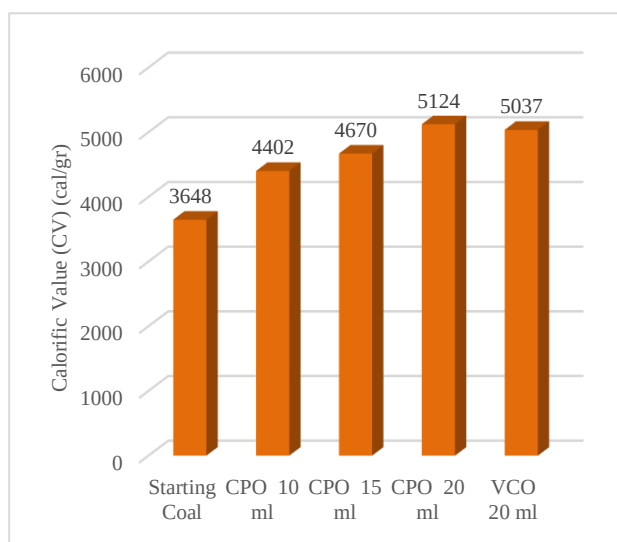


Figure 3. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV). It can be seen that the use of virgin coconut oil (VCO) in the agglomeration process is the optimum result obtained.

ACKNOWLEDGEMENTS

The faculty of industrial technology provided the writers with moral and financial support that allowed them to do this study and write an essay.

REFERENCES

- [1] Ministry of Energy and Mineral Resources, "Indonesia's Mineral & Coal Policy". Jakarta: Directorate General of Mineral and Coal, 2021a.
- [2] Ministry of Energy and Mineral Resources, "Road Map for Coal Development and Utilisation". Jakarta: Directorate General of Mineral and Coal, 2021b.
- [3] R. Prabowo and I. Prengki, "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using minyak jelantah", IOP Conference Series: Earth and Environmental Science, Vol. 413, No. 1, pp. 34-40, 2020.
- [4] C. Cerik and V. Arslan, "The Modelling Of Fine Coal Beneficiation With A Water-Only Cyclone", Gospodarka Surowcami Mineralnymi - Mineral Resources Management, Vol. 38, No. 3, pp. 137-150, Jul. 2023.
- [5] E. Sanwani, A. Ibrahim, A. Sudarsono, and I. Handayani, "Coal Washing", Bandung: Department of Mining Engineering, Bandung Institute of Technology, 1998.
- [6] R.G. Abaszade, A.G. Mammadov, V.O. Kotsyubynsky, E.Y. Gur, I.Y. Bayramov, E.A. Khanmamadova and O.A. Kapush, "Modeling Of Voltage-Ampere Characteristic Structures On The Basis Of Graphene Oxide/Sulfur Compounds", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 2, pp. 302-306, 2022.
- [7] A. Nelvi, A. Fadhly, J. A. Wardani, and H. Rahmi, "Optimisation of Calorific Value and Ash Content of Brown Coal Using Crude Lime-Palm Oil-Water Agglomeration Method", Mining Journal, Vol. 6, No. 4, pp. 178-183, Feb. 2023.
- [8] M. Özer, O. M. Basha, and B. Morsi, "Coal-Agglomeration Processes: A Review", International Journal of Coal Preparation and Utilization, Vol. 37, No. 3, pp. 131-167, May 2017.
- [9] Nukman and S. Poertadji, "Reduction of Ash and Sulphur Content in Sub Bituminous Coal by Palm Oil-Water Agglomeration Method", Indonesian Journal of Materials Science, Vol. 7, No. 3, pp. 31-36, 2006.
- [10] S. Wang and X. Tao, "Effect Of Surfactants On The Flotation Performance Of Low-Rank Coal By Particle Sliding Process Measurements", Mineral Resources Management, Vol. 34, No. 1, pp. 69-82, 2018.
- [11] M. Arifin, E. Sanwani, and S. K. Chaerun, "Removal Of Sulfur And Ash From Indonesian Coal By Indigenous Mixotrophic Bacteria", Current Research on Biosciences and Biotechnology, Vol. 1, No. 2, pp. 71-76, Feb. 2020.
- [12] S. R. Nurhawaisyah, E. Sanwani, S. K. Chaerun, and M. A. Rasyid, "Clean Coal Technology Using An Iron-And Sulfur-Oxidizing Mixotrophic Bacterium", IOP Conf Ser Mater Sci Eng, Vol. 478, No. 34, pp. 103-109, 2019.
- [13] ASTM D3173/D3173M-17a, "Standard Test Method For Moisture In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2017

- [14] ASTM D3175-18, "Standard Test Method For Volatile Matter In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2018.
- [15] ASTM D5142-09, "Standard Test Method For Fixed Carbon In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2009
- [16] ASTM D3174-12, "Standard Test Method For Ash In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2012.
- [17] ASTM D2492-02, "Standard Test Method For Sulfur In Coal", ASTM International, West Conshohocken, PA, 2002.
- [18] ASTM D2015-00, "Standard Test Method For Gross Calorific Value Of Coal And Coke By The Adiabatic Bomb Calorimeter", ASTM International, West Conshohocken, PA, 2000.
- [19] R. Pratama, Sufriadin, and S. Widodo, "Study Of Increasing The Calorific Value Of Coal Using Waste Cooking Oil", IOP Conf Ser Earth Environ Sci, vol. 1134, No. 1, pp. 78-82, Jan. 2023.
- [20] M. Irsyad, A. Amrizal, M.D. Susila, A. Amrul and T.M. Fransisco, "Heat Transfer Characteristics Of Coconut Oil As Phase Change Materials In Freezing Process", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 1, pp. 29-33, 2022.
- [21] A. Aladin, "Empirical Modelling of Coal Desulphurisation by Flotation with Rayleigh Method", Journal of Chemical Process Engineering, Vol. 5, No. 1, pp. 45-53, 2020.
- [22] A. Aladin, "Determination of the Optimum Ratio of CPO: Coal in Desulphurisation and Deashing by Continuous Flotation System", Journal of Process Engineering, Vol. 3, No. 2, pp. 50-56, 2009.
- [23] N. M. N. W. H. H. Agung, "Relationship between total sulphur content and gross calorific value of coal PT. Carsurin Samarinda", Journal of Mineral Technology, Vol. 7, No. 1, pp. 1-8, 2019.

BIOGRAPHIES



Name: Nurliah
Surname: Jafar
Birthday: 29.09.1984
Birthplace: Barru, Indonesia
Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2008

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2014

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2009

Research Interests: Exploration mining

Scientific Publications: 38 Research

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Muhammad

Middle Name: Idris

Surname: Juradi

Birthday: 12.02.1992

Birthplace: Malili, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 2014

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2017

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2016

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 22 Papers, 4 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Suriyanto

Surname: Bakri

Birthday: 19.11.1986

Birthplace: Sidrap, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2009

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2018

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2018

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 29 Papers, 3 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: **Lamatinulu**

Surname: **Lamatinulu**

Birthday: 08.06.1969

Birthplace: Palopo, Indonesia

Bachelor: Industrial Engineering and Management, Industrial Engineering Department, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Master: Industrial Management, Department of Industrial Engineering, Faculty of Industrial Technology, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia, 2002
Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Doctorate: Manufacturing Industrial Engineering, Mechanical Engineering Department, Faculty of Engineering, Brawijaya University, Malang, Indonesia, 2018

The Last Scientific Position: Prof., Department of Engineering Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2007

Research Interests: Operation Research, Performance Measurement, Product Development, Production Planning and Control

Scientific Publications: 30 Papers, 3 Books, 7 Copyrights, 5 Research Projects

Scientific Memberships: Indonesian Engineers Association, Indonesian Lecturer Association

4. Bukti konfirmasi review dan hasil review (27 Januari 2024)



Int Journal of IJTPE (IOTPE) <ijtp0@gmail.com>
to me ▾

Jan 27, 2024, 12:23 AM



Dear Author,

The revised paper is received and under review.



Best regards,

Editor-in-Chief of International Journal on
"Technical and Physical Problems of Engineering" (IJTPE)
ISSN 2077-3528
is supported by: International Organization of IOTPE
URL: www.iotpe.com
Email: ijtp0@iotpe.com , ijtp0@gmail.com

IOTPE is supporting: ICTPE Conference, IJTPE Journal, IETPE Enterprise



5. Bukti konfirmasi review (4 Februari 2024)



Int Journal of IJTPE (IJTPE) <ijtpe0@gma... Feb 4, 2024, 1:50 AM



to me ▾

Dear Author,

Paper ID: 1826-240125

Please kindly revise your submitted paper considering the following Review Comments and resend it again for checking out.

REVIEW COMMENTS:

- Please send your paper according to the IJTPE journal format and the following review comments:

www.ijtpc.com/IJTPE/FormatOfPapers.html

- All used figures, tables and equations SHOULD BE addressed to the related ORIGINAL references by [] in the end of titles.

- (IMPORTANT) - Address all the used figures and tables from the related original references in text as well as the titles using [].

- Request PERMISSION to use the figures and tables from related resources.

- (IMPORTANT) - Address all the used equations from the related original references.

- If any figure/table/equation is used from a reference then write down the reference number inside [] at the end of the figure/table title and also at the end of the related paragraphs.

- Change the picture(s) resolution by the following setting in the paper.

Click File -> Options -> Advanced


Select:

Image Size and Quality

Default Resolution: High Fidelity

OK

6. Bukti konfirmasi submit revisi ketiga dan respon kepada reviewer serta artikel yang diresubmit (12 Februari 2024)



...

Muhammad Idris Juradi



EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

N. Jafar¹ M.I. Juradi¹ S.Bakri¹ Lamatinulu²

1. Department of Mining Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, nurliah.jafar@umi.ac.id, muhidris.juradi@umi.ac.id, suriyanto.bakri@umi.ac.id,
2. Department of Industrial Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, Lamatinulu@gmail.com

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal. (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

Data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources indicate that Indonesia has a very large potential for coal resources., Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Beyond calorific value, ash (A) and sulphur (S) are contaminants and a measure of coal quality. Burning coal will produce sulphur (S) oxides due to its sulphur (S) concentration. [3]. This substance may react with atmospheric water vapour to produce H_2SO_3 and H_2SO_4 . Acid rain will happen if both acids are polluted in the atmosphere and descend with rains at the same time. Sulphur (S) oxides released from burning coal have the potential to produce acid rain hundreds of miles away. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Washing the coal reduces the amount of ash (A) and sulphur (S) from inorganic components; this process is known as the agglomeration technique [5]. The presence of sulfur will also affect the compounds present in coal so that it is necessary to reduce the sulfur content [6].

Ash (A) and sulphur (S) may be effectively removed from coal using the oil-water agglomeration method. Oil agglomeration can be used to create a solid, viscous product by combining coal particles of various sizes, or agglomerates [7]. Because the coal surface is hydrophobic (hates water) and lipophilic (loves oil), this agglomeration approach can be used. [8]. Waste material is submerged in the media, but clean coal floats in the same medium (water) [9].

Coal particles may be formed into agglomerates to create coal oil mixes since they are hydrophobic by nature [10]. However, the hydrophilic mineral particles that give coal its ash (A) and sulphur (S) are unaffected and stay in the water [11]. The coal agglomeration particles may be separated from the mineral particles because they are bigger. When oil is present during washing, water containing ash (A) will no longer stick to the coal surface [12]. This study is to examine the use of virgin coconut oil

and palm cooking oil on lowering ash (A), sulphur (S), and raising the calorific value (CV) of coal, as well as to ascertain the impact of oil volume variation.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1,000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24. The resulting agglomerate is then ovenised at 110°C for 2 hours.

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [13], volatile matter standard method ASTM D3175 [14], fixed carbon standard method ASTM D5142 [15], ash content with standard method used ASTM D3174 [16], total sulfur analysis ASTM D2492 [17] and calorific value with standard measurement ASTM D2015 [18]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1) [16], the equation for reducing sulfur content (equation 2) [17] and increasing calorific value (equation 3) [18] can be calculated using the equation:

$$\text{Decrease in AC (\%)} = \frac{(a_1 - a_2)}{a_2} \cdot 100\% \quad (1)$$

$$\text{Decrease in S (\%)} = \frac{(S_1 - S_2)}{S_2} \cdot 100\% \quad (2)$$

$$\text{Increase in CV (\%)} = \frac{(C_1 - C_2)}{C_1} \cdot 100\% \quad (3)$$

Table 1. Description of equations 1-3 [16, 17, 18]

No.	Description	Unit	Code
1	Ash content of coal samples	%	a ₁
2	Coal ash content after agglomeration process	%	a ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Analysis of the characteristics of coal samples reveals the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) by 2.78% and The Calorific Value (CV) of 3,648 cal/gr. Table 2 displays the full coal analysis results.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3,648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters				
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)
	AC	Decrease in AC (%)			
Starting Coal	36.72		2.78		3,648
CPO 10 mL	24.70	32.73	1.96	29.50	4,402
CPO 15 mL	22.84	37.80	1.68	39.57	4,670
CPO 20 mL	15.55	57.65	1.30	53.24	5,124
VCO 20 mL	9.77	73.39	1.79	35.61	5,037

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL. In Figure 1 below, the outcomes of the proximate analysis are displayed.

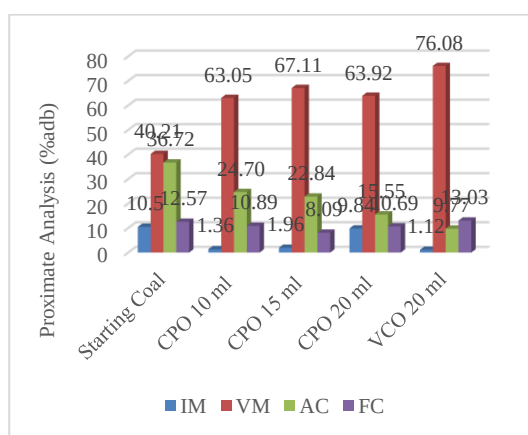


Figure 1. Comparison of proximate analysis after agglomeration process

Figure 1 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [19] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing the agglomeration process [20]. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 24.70%, 22.84%, 15.55% and 9.77%.

Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Since coal agglomerate particles are larger than mineral particles, they can be [21]. The fixed carbon value decreased by about 10.89% 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 2 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68% 1.30% and 1.79%. Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Coal agglomerate particles may be isolated from mineral particles because they are bigger [22].

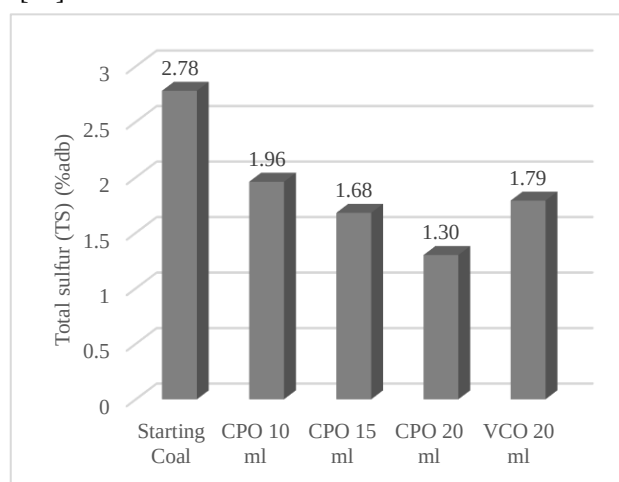


Figure 2. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 3 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89% 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [23].

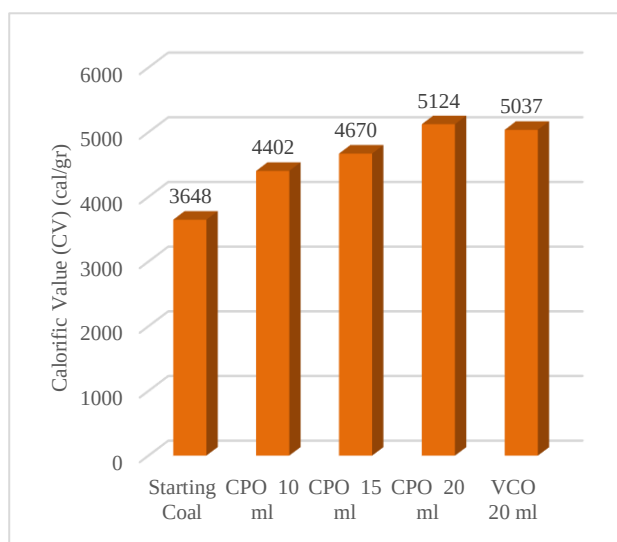


Figure 3. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV). It can be seen that the use of virgin coconut oil (VCO) in the agglomeration process is the optimum result obtained.

ACKNOWLEDGEMENTS

The faculty of industrial technology provided the writers with moral and financial support that allowed them to do this study and write an essay.

REFERENCES

- [1] Ministry of Energy and Mineral Resources, "Indonesia's Mineral & Coal Policy". Jakarta: Directorate General of Mineral and Coal, 2021a.
- [2] Ministry of Energy and Mineral Resources, "Road Map for Coal Development and Utilisation". Jakarta: Directorate General of Mineral and Coal, 2021b.
- [3] R. Prabowo and I. Prengki, "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using minyak jelantah", IOP Conference Series: Earth and Environmental Science, Vol. 413, No. 1, pp. 34-40, 2020.
- [4] C. Cerik and V. Arslan, "The Modelling Of Fine Coal Beneficiation With A Water-Only Cyclone", Gospodarka Surowcami Mineralnymi - Mineral Resources Management, Vol. 38, No. 3, pp. 137-150, Jul. 2023.
- [5] E. Sanwani, A. Ibrahim, A. Sudarsono, and I. Handayani, "Coal Washing", Bandung: Department of Mining Engineering, Bandung Institute of Technology, 1998.
- [6] R.G. Abaszade, A.G. Mammadov, V.O. Kotsyubynsky, E.Y. Gur, I.Y. Bayramov, E.A. Khanmamadova and O.A. Kapush, "Modeling Of Voltage-Ampere Characteristic Structures On The Basis Of Graphene Oxide/Sulfur Compounds", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 2, pp. 302-306, 2022.
- [7] A. Nelvi, A. Fadhly, J. A. Wardani, and H. Rahmi, "Optimisation of Calorific Value and Ash Content of Brown Coal Using Crude Lime-Palm Oil-Water Agglomeration Method", Mining Journal, Vol. 6, No. 4, pp. 178-183, Feb. 2023.
- [8] M. Özer, O. M. Basha, and B. Morsi, "Coal-Agglomeration Processes: A Review", International Journal of Coal Preparation and Utilization, Vol. 37, No. 3, pp. 131-167, May 2017.
- [9] Nukman and S. Poertadji, "Reduction of Ash and Sulphur Content in Sub Bituminous Coal by Palm Oil-Water Agglomeration Method", Indonesian Journal of Materials Science, Vol. 7, No. 3, pp. 31-36, 2006.
- [10] S. Wang and X. Tao, "Effect Of Surfactants On The Flotation Performance Of Low-Rank Coal By Particle Sliding Process Measurements", Mineral Resources Management, Vol. 34, No. 1, pp. 69-82, 2018.
- [11] M. Arifin, E. Sanwani, and S. K. Chaerun, "Removal Of Sulfur And Ash From Indonesian Coal By Indigenous Mixotrophic Bacteria", Current Research on Biosciences and Biotechnology, Vol. 1, No. 2, pp. 71-76, Feb. 2020.
- [12] S. R. Nurhawaisyah, E. Sanwani, S. K. Chaerun, and M. A. Rasyid, "Clean Coal Technology Using An Iron-And Sulfur-Oxidizing Mixotrophic Bacterium", IOP Conf Ser Mater Sci Eng, Vol. 478, No. 34, pp. 103-109, 2019.
- [13] ASTM D3173/D3173M-17a, "Standard Test Method For Moisture In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2017

- [14] ASTM D3175-18, "Standard Test Method For Volatile Matter In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2018.
- [15] ASTM D5142-09, "Standard Test Method For Fixed Carbon In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2009
- [16] ASTM D3174-12, "Standard Test Method For Ash In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2012.
- [17] ASTM D2492-02, "Standard Test Method For Sulfur In Coal", ASTM International, West Conshohocken, PA, 2002.
- [18] ASTM D2015-00, "Standard Test Method For Gross Calorific Value Of Coal And Coke By The Adiabatic Bomb Calorimeter", ASTM International, West Conshohocken, PA, 2000.
- [19] R. Pratama, Sufriadin, and S. Widodo, "Study Of Increasing The Calorific Value Of Coal Using Waste Cooking Oil", IOP Conf Ser Earth Environ Sci, vol. 1134, No. 1, pp. 78-82, Jan. 2023.
- [20] M. Irsyad, A. Amrizal, M.D. Susila, A. Amrul and T.M. Fransisco, "Heat Transfer Characteristics Of Coconut Oil As Phase Change Materials In Freezing Process", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 1, pp. 29-33, 2022.
- [21] A. Aladin, "Empirical Modelling of Coal Desulphurisation by Flotation with Rayleigh Method", Journal of Chemical Process Engineering, Vol. 5, No. 1, pp. 45-53, 2020.
- [22] A. Aladin, "Determination of the Optimum Ratio of CPO: Coal in Desulphurisation and Deashing by Continuous Flotation System", Journal of Process Engineering, Vol. 3, No. 2, pp. 50-56, 2009.
- [23] N. M. N. W. H. H. Agung, "Relationship between total sulphur content and gross calorific value of coal PT. Carsurin Samarinda", Journal of Mineral Technology, Vol. 7, No. 1, pp. 1-8, 2019.

BIOGRAPHIES



Name: Nurliah
Surname: Jafar
Birthday: 29.09.1984
Birthplace: Barru, Indonesia
Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2008

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2014

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2009

Research Interests: Exploration mining

Scientific Publications: 38 Research

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Muhammad

Middle Name: Idris

Surname: Juradi

Birthday: 12.02.1992

Birthplace: Malili, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 2014

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2017

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2016

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 22 Papers, 4 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Suriyanto

Surname: Bakri

Birthday: 19.11.1986

Birthplace: Sidrap, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2009

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2018

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2018

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 29 Papers, 3 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: **Lamatinulu**

Surname: **Lamatinulu**

Birthday: 08.06.1969

Birthplace: Palopo, Indonesia

Bachelor: Industrial Engineering and Management, Industrial Engineering Department, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Master: Industrial Management, Department of Industrial Engineering, Faculty of Industrial Technology, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia, 2002
Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Doctorate: Manufacturing Industrial Engineering, Mechanical Engineering Department, Faculty of Engineering, Brawijaya University, Malang, Indonesia, 2018

The Last Scientific Position: Prof., Department of Engineering Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2007

Research Interests: Operation Research, Performance Measurement, Product Development, Production Planning and Control

Scientific Publications: 30 Papers, 3 Books, 7 Copyrights, 5 Research Projects

Scientific Memberships: Indonesian Engineers Association, Indonesian Lecturer Association

7. Bukti konfirmasi review keempat (12 Februari 2024)



Int Journal of IJTPE (IOTPE) <ijtp0@gma... Mon, Feb 12, 7:47 PM
to me ▾



Dear Author,

Paper ID: 1826-240125

Please kindly revise your submitted paper considering the following Review Comments and resend it again for checking out.

REVIEW COMMENTS:

- Translate non-English phrases in English in reference 10.
- Complete information of references 13-18.

RC 2

Best regards,


Editor-in-Chief of International Journal on
"Technical and Physical Problems of Engineering" (IJTPE)
ISSN 2077-3528
is supported by: International Organization of IOTPE
URL: www.iotpe.com
Email: ijtp0@iotpe.com , ijtp0@gmail.com

IOTPE is supporting: ICTPE Conference, IJTPE Journal, IETPE Enterprise



Membership & Citation: www.iotpe.com

8. Bukti konfirmasi submit revisi ketiga dan respon kepada reviewer serta artikel yang diresubmit (13 Februari 2024)



 Tue, Feb 13, 9:32AM



Dear journal managers,

attached is our revised manuscript.

Best regards,

Muhammad Idris Juradi



One attachment • Scanned by Gmail ⓘ



EFFECT OF OIL USE ON AGGLOMERATION PROCESS FOR COAL QUALITY IMPROVEMENT

N. Jafar¹ M.I. Juradi¹ S.Bakri¹ Lamatinulu²

1. Department of Mining Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, nurliah.jafar@umi.ac.id, muhidris.juradi@umi.ac.id, suriyanto.bakri@umi.ac.id,
2. Department of Industrial Engineering, Faculty of Industrial Technology, Universitas Muslim Indonesia, Makassar, Indonesia, Lamatinulu@gmail.com

Abstract- Parameters for determining coal quality can be seen from the ash value (A), sulfur (S), and heating value (CV). The presence of ash (A) and sulfur (S) in coal (C) is highly undesirable, whereas the high calorific value (CV) of coal (C) is desirable. One effort that can be made to reduce ash (A) and sulfur (S) and increase the heating value (CV) is the agglomeration method (AM). This research aims to determine the effect of variations in oil volume and compare the use of palm cooking oil (CPO) and pure coconut oil (VCO) on reducing ash (A), sulfur (S) and increasing the calorific value (CV) of coal. (C). The research method used is an experimental method and a quantitative method by collecting several fixed variables and independent variables and then the data is interpreted to find the best conditions for each experimental result. The research results showed a decrease in ash (A) and sulfur (S) levels as well as an increase in the calorific value (CV) in 10 mL of fried palm oil (CPO), namely 32.73%, 29.50% and 20.67%. The reduction in ash (A), sulfur (S), and calorific value (CV) in 15 mL of palm cooking oil (CPO) was 37.80%, 39.57%, and 28.02%, respectively. The reduction in ash (A), sulfur (S), and calorific value in 20 mL of palm cooking oil (CPO) was 57.65%, 53.24%, and 40.46%. The reduction in ash content (A), sulfur (S), and calorific value in 20 mL of pure coconut oil (VCO) was 73.39%, 35.61%, and 38.08%. From the research results it can be concluded that the agglomeration method (AM) of water and oil can reduce ash (A) and sulfur (S) and increase the calorific value (CV).

Keywords: Coal, agglomeration, ash, sulfur, calorific value.

1. INTRODUCTION

Data from the Director General of Mineral and Coal of the Ministry of Energy and Mineral Resources indicate that Indonesia has a very large potential for coal resources., Indonesia's coal reserves currently reach 38.84 billion tonnes with an average coal production of 600 million tonnes per year, so the age of coal reserves is still 65 years if it is assumed that there are no new reserve findings [1]

Until now, coal is still the foundation in the Asia Pacific region in providing affordable and cheap energy. In line with measures to reduce greenhouse gas emissions from the energy sector, the Ministry of Energy and Mineral Resources is seeking new breakthroughs through the use of clean energy-based technology, which is expected to optimise coal utilisation in Indonesia [2]

Beyond calorific value, ash (A) and sulphur (S) are contaminants and a measure of coal quality. Burning coal will produce sulphur (S) oxides due to its sulphur (S) concentration. [3]. This substance may react with atmospheric water vapour to produce H_2SO_3 and H_2SO_4 . Acid rain will happen if both acids are polluted in the atmosphere and descend with rains at the same time. Sulphur (S) oxides released from burning coal have the potential to produce acid rain hundreds of miles away. Efforts to reduce ash (A) and sulfur (S) content in coal, in addition to removing impurities, are also an effort to increase the calorific value of coal so that it can provide added value for improving coal quality [4]. Washing the coal reduces the amount of ash (A) and sulphur (S) from inorganic components; this process is known as the agglomeration technique [5]. The presence of sulfur will also affect the compounds present in coal so that it is necessary to reduce the sulfur content [6].

Ash (A) and sulphur (S) may be effectively removed from coal using the oil-water agglomeration method. Oil agglomeration can be used to create a solid, viscous product by combining coal particles of various sizes, or agglomerates [7]. Because the coal surface is hydrophobic (hates water) and lipophilic (loves oil), this agglomeration approach can be used. [8]. Waste material is submerged in the media, but clean coal floats in the same medium (water) [9].

Coal particles may be formed into agglomerates to create coal oil mixes since they are hydrophobic by nature [10]. However, the hydrophilic mineral particles that give coal its ash (A) and sulphur (S) are unaffected and stay in the water [11]. The coal agglomeration particles may be separated from the mineral particles because they are bigger. When oil is present during washing, water containing ash (A) will no longer stick to the coal surface [12]. This study is to examine the use of virgin coconut oil

and palm cooking oil on lowering ash (A), sulphur (S), and raising the calorific value (CV) of coal, as well as to ascertain the impact of oil volume variation.

2. MATERIAL AND METHOD

2.1 Coal Samples

The coal samples used came from Lanne village, Tondong Tallasa sub-district, Pangkep district, South Sulawesi. The agglomeration process stage is carried out after the coal samples obtained are prepared using a double roll crusher and ball mill and then sifted using a sieve shaker to get the required particle size of -200 +325 mesh (-74 + 44 μm).

2.2 Experiment Procedure

The agglomeration process begins with the preparation of tools and materials, then put water first into a 250 mL erlenmeyer flask with a volume that adjusts to the volume of oil used to stay at a volume of 150 mL, into the erlenmeyer flask along with coal measuring -200 + 325 mesh (-74 + 44 μm) as much as ± 15 grams. The Erlenmeyer flask that has been filled with coal and water is then stirred with a stirrer at 1,000 rpm for 3 minutes, after which the initial stirring between coal and water is carried out by entering 10 mL of oil and stirring again for 3 minutes. After 3 minutes of stirring between coal, water and oil, the agglomerates formed were then allowed to stand for 3 minutes and then the agglomerates were filtered with a 200 mesh sieve so that the water would drip down for 24. The resulting agglomerate is then ovenised at 110°C for 2 hours.

The heated agglomerates are then ready for proximate, total sulfur (S) and calorific value analyses to compare with the data before the agglomeration process. Subsequent experiments with oil volumes of 15 mL and 20 mL were conducted with the same process. The most optimal results from these three oils will then be used for the experiment on virgin coconut oil.

2.3. Analytical Measurement

Samples that have gone through the drying process are then analysed proximate to know inherent moisture standard method ASTM D3173/D3173M [13], volatile matter standard method ASTM D3175 [14], fixed carbon standard method ASTM D5142 [15], ash content with standard method used ASTM D3174 [16], total sulfur analysis ASTM D2492 [17] and calorific value with standard measurement ASTM D2015 [18]. The results of the analysis will then be compared with the initial data before agglomeration in the form of a comparison graph made on Microsoft excel and also a scientific explanation of changes in data on ash content, sulfur and calorific value before and after the agglomeration process using the equation for reducing ash content (equation 1) [16], the equation for reducing sulfur content (equation 2) [17] and increasing calorific value (equation 3) [18] can be calculated using the equation:

$$\text{Decrease in AC (\%)} = \frac{(a_1 - a_2)}{a_2} \cdot 100\% \quad (1)$$

$$\text{Decrease in S (\%)} = \frac{(S_1 - S_2)}{S_2} \cdot 100\% \quad (2)$$

$$\text{Increase in CV (\%)} = \frac{(C_1 - C_2)}{C_1} \cdot 100\% \quad (3)$$

Table 1. Description of equations 1-3 [16, 17, 18]

No.	Description	Unit	Code
1	Ash content of coal samples	%	a ₁
2	Coal ash content after agglomeration process	%	a ₂
3	Total sulfur content of coal samples	%	S ₁
4	Total sulfur content after agglomeration process	%	S ₂
5	Calorific Value of coal samples	(cal/gr)	C ₁
6	Calorific Value after agglomeration process	(cal/gr)	C ₂

3. RESULTS AND DISCUSSION

3.1 Coal Samples Characteristics

Analysis of the characteristics of coal samples reveals the value of inherent moisture (IM) of 10.50%, volatile matter (VM) by 40.21% fixed carbon (FC) at 12.57%, ash (A) content (AC) of 36.72%, total sulfur (S) (TS) by 2.78% and The Calorific Value (CV) of 3,648 cal/gr. Table 2 displays the full coal analysis results.

Table 2. Coal quality based on proximate and calorific value analyses

No.	Parameters	Analysis Result
1	Inherent Moisture (IM)	10.50% adb
2	Volatile Matter (VM)	40.21% adb
3	Fixed Carbon (FC)	12.57% adb
4	Ash Content (AC)	36.72% adb
5	Total Sulfur (S)	2.78% adb
6	Calorific Value (CV)	3,648 cal/gr

3.2 Water And Oil Agglomeration Results

In conducting the research, 2 types of oil were used, namely Cooking Palm Oil (CPO) and Virgin Coconut Oil (VCO), which will be used as a comparison at the end. In this study, proximate analysis, total sulfur (S) and calorific value (CV) of coal samples were used. The results of coal sample analysis after and before agglomeration can be seen in Table 3 below.

Table 3. Analytical results of coal samples before and after agglomeration process

Sample ID	Parameters				
	Proximate (%adb)		S (%adb)	Decrease in S (%)	CV (cal/gr)
	AC	Decrease in AC (%)			
Starting Coal	36.72		2.78		3,648
CPO 10 mL	24.70	32.73	1.96	29.50	4,402
CPO 15 mL	22.84	37.80	1.68	39.57	4,670
CPO 20 mL	15.55	57.65	1.30	53.24	5,124
VCO 20 mL	9.77	73.39	1.79	35.61	5,037

Table 1 shows the value of the coal sample before the agglomeration process. The focus of this research is with initial data of ash (A) content of 36.72%, total sulfur (S) of 2.78% and calorific value (CV) of 3,648 cal/gr. Table 3 above also shows a decrease in ash (A), sulfur (S) and an increase in calorific value (CV) in each experiment. The highest decrease in ash (A) content occurred in coal agglomeration with 20 mL virgin coconut oil (VCO), namely 73.39%, the highest decrease in sulfur (S) content occurred in coal agglomeration with 20 mL Cooking Palm Oil (CPO), namely 53.24% and the highest increase in calorific value (CV) occurred in agglomeration with 20 mL cooking palm oil, namely 40.46%.

3.3 Effect Of The Addition Of Palm Cooking Oil And Virgin Coconut Oil On Proximate Results

The effect of agglomeration on coal after the agglomeration process using Cooking Palm Oil (CPO) 10 mL, 15 mL, 20 mL and virgin coconut oil (VCO) 20 mL. In Figure 1 below, the outcomes of the proximate analysis are displayed.

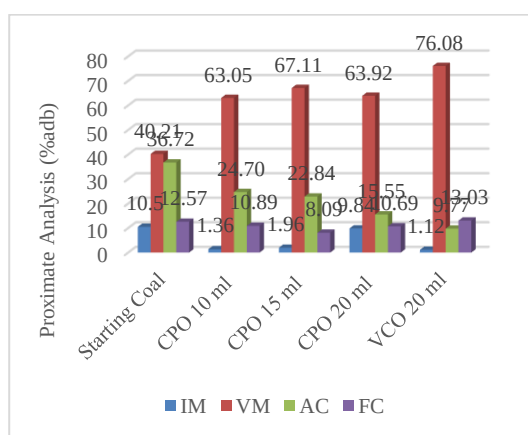


Figure 1. Comparison of proximate analysis after agglomeration process

Figure 1 shows the changes in proximate analysis before agglomeration and after adding Cooking Palm Oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely the inherent moisture content dropped to 1.36%, 1.96%, 9.84% and 1.12%. Inherent moisture of palm cooking oil 20 mL experienced the least decrease among other oil variations in the range of $\pm 1\%$, this can occur because the waiting time of coal after the oven process affects the ability of coal to reabsorb water content where the longer the waiting time, the higher the coal reabsorbs its water content [19] in this study the samples that had been in the oven were left first before being put into the sample bottle. In volatile matter, namely 63.05%, 67.11%, 63.92% and 76.08%, this increase is thought to occur due to the compounding of coal carbon with oil, forming hydrocarbon groups that are more easily decomposed after undergoing the agglomeration process [20]. Ash (A) content also decreased in palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL, namely to 24.70%, 22.84%, 15.55% and 9.77%.

Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Since coal agglomerate particles are larger than mineral particles, they can be [21]. The fixed carbon value decreased by about 10.89%, 8.09%, 10.69% the decrease in fixed carbon is not in line with the increase in calorific value and in virgin coconut oil increased by 13.03%.

3.4 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Total Sulfur (S) Analysis Result

Figure 2 shows the changes in total sulfur (S) between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which decreased by 1.96%, 1.68%, 1.30% and 1.79%. Coal particles may be converted into agglomerates in the form of mixes with oil since they are hydrophobic by nature. However, ash (A) and sulphur (S) content in coal come from hydrophilic mineral particles, which are unaffected and stay in the water. Coal agglomerate particles may be isolated from mineral particles because they are bigger [22].

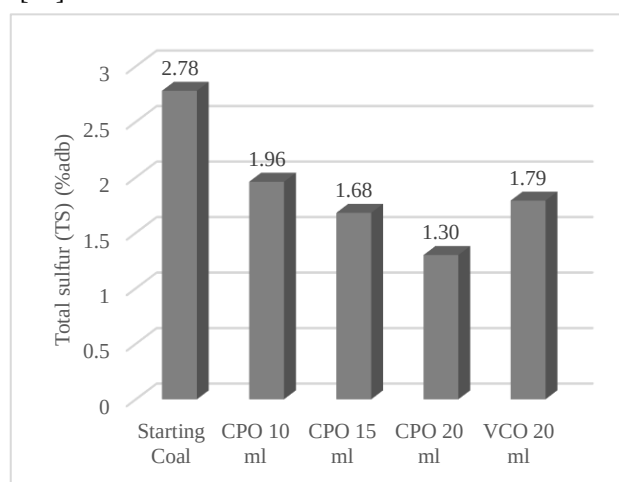


Figure 2. Comparison of total sulfur (S) after agglomeration process

3.5 Effect Of Palm Cooking Oil And Virgin Coconut Oil Addition On Coal Calorific Value

Figure 3 shows the changes in calorific value between before agglomeration with palm cooking oil 10 mL, 15 mL, 20 mL and virgin coconut oil 20 mL which increased to 4,402 cal/gr, 4,670 cal/gr, 5,124 cal/gr and 5,037 cal/gr. The percentage increase in calorific value was 20.67%, 28.02%, 40.46% and 38.08% respectively. Based on Figure 1. shows that the value of fixed carbon has decreased by about 10.89% 10.89%, 8.09% and 10.69% for palm oil has decreased fixed carbon on which is not in line with the increase in calorific value. The decrease in carbon content caused by the agglomeration process does not cause the calorific value of coal to decrease, but instead increases. This shows that the calorific value of coal does not only depend on its carbon content, but still depends on other things, such as age, origin, environmental conditions of coal formation and so on [23].

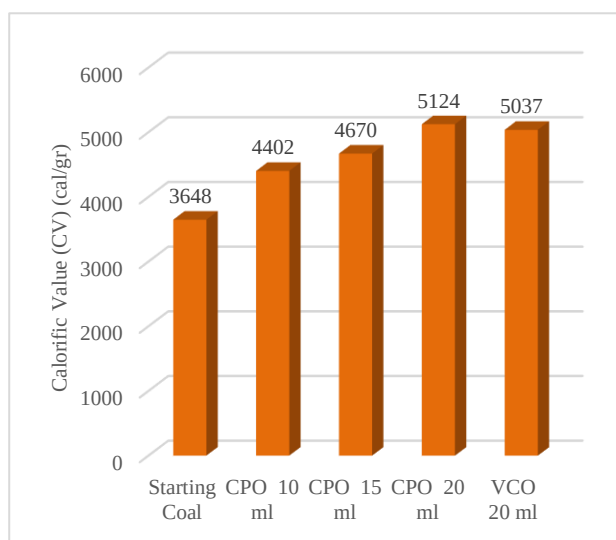


Figure 3. Calorific value (CV) comparison after agglomeration

4. CONCLUSIONS

The conclusion of this research is that the results of the agglomeration process with variable volume of Cooking Palm Oil (CPO) use obtained the best results at a volume of 20 mL with a decrease in ash (A) content by 57.65%, a decrease in sulfur (S) content by 53.24% and an increase in calorific value (CV) by 40.46%. While the results of the comparison of the use of Cooking Palm Oil (CPO) and virgin coconut oil (VCO) with the same volume of oil, namely 20 mL, a decrease in ash (A) content using virgin coconut oil (VCO) obtained the best results with a percentage decrease of 73.39%, on the other hand, a decrease in sulfur (S) content and an increase in calorific Values (CV), the best results were obtained by using cooking palm oil (CPO) with each value of 53% for a decrease in sulfur (S) content and 40.46% for an increase in calorific values (CV). It can be seen that the use of virgin coconut oil (VCO) in the agglomeration process is the optimum result obtained.

ACKNOWLEDGEMENTS

The faculty of industrial technology provided the writers with moral and financial support that allowed them to do this study and write an essay.

REFERENCES

- [1] Ministry of Energy and Mineral Resources, "Indonesia's Mineral & Coal Policy". Jakarta: Directorate General of Mineral and Coal, 2021a.
- [2] Ministry of Energy and Mineral Resources, "Road Map for Coal Development and Utilisation". Jakarta: Directorate General of Mineral and Coal, 2021b.
- [3] R. Prabowo and I. Prengki, "Decreasing the ash coal and sulfur contents of sawahlunto subbituminous coal by using minyak jelantah", IOP Conference Series: Earth and Environmental Science, Vol. 413, No. 1, pp. 34-40, 2020.
- [4] C. Cerik and V. Arslan, "The Modelling Of Fine Coal Beneficiation With A Water-Only Cyclone", Gospodarka Surowcami Mineralnymi - Mineral Resources Management, Vol. 38, No. 3, pp. 137-150, Jul. 2023.
- [5] E. Sanwani, A. Ibrahim, A. Sudarsono, and I. Handayani, "Coal Washing", Bandung: Department of Mining Engineering, Bandung Institute of Technology, 1998.
- [6] R.G. Abaszade, A.G. Mammadov, V.O. Kotsyubynsky, E.Y. Gur, I.Y. Bayramov, E.A. Khanmamadova and O.A. Kapush, "Modeling Of Voltage-Ampere Characteristic Structures On The Basis Of Graphene Oxide/Sulfur Compounds", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 2, pp. 302-306, 2022.
- [7] A. Nelvi, A. Fadhly, J. A. Wardani, and H. Rahmi, "Optimisation of Calorific Value and Ash Content of Brown Coal Using Crude Lime-Palm Oil-Water Agglomeration Method", Mining Journal, Vol. 6, No. 4, pp. 178-183, Feb. 2023.
- [8] M. Özer, O. M. Basha, and B. Morsi, "Coal-Agglomeration Processes: A Review", International Journal of Coal Preparation and Utilization, Vol. 37, No. 3, pp. 131-167, May 2017.
- [9] Nukman and S. Poertadji, "Reduction of Ash and Sulphur Content in Sub Bituminous Coal by Palm Oil-Water Agglomeration Method", Indonesian Journal of Materials Science, Vol. 7, No. 3, pp. 31-36, 2006.
- [10] S. Wang and X. Tao, "Effect Of Surfactants On The Flotation Performance Of Low-Rank Coal By Particle Sliding Process Measurements", Mineral Resources Management, Vol. 34, No. 1, pp. 69-82, 2018.
- [11] M. Arifin, E. Sanwani, and S. K. Chaerun, "Removal Of Sulfur And Ash From Indonesian Coal By Indigenous Mixotrophic Bacteria", Current Research on Biosciences and Biotechnology, Vol. 1, No. 2, pp. 71-76, Feb. 2020.
- [12] S. R. Nurhawaisyah, E. Sanwani, S. K. Chaerun, and M. A. Rasyid, "Clean Coal Technology Using An Iron-And Sulfur-Oxidizing Mixotrophic Bacterium", IOP Conf Ser Mater Sci Eng, Vol. 478, No. 34, pp. 103-109, 2019.
- [13] ASTM D3173/D3173M-17a, "Standard Test Method For Moisture In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2017

- [14] ASTM D3175-18, "Standard Test Method For Volatile Matter In The Analysis Sample Of Coal And Coke", ASTM International, West Conshohocken, PA, 2018.
- [15] ASTM D5142-09, "Standard Test Method For Fixed Carbon In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2009
- [16] ASTM D3174-12, "Standard Test Method For Ash In The Analysis Sample Of Coal And Coke From Coal", ASTM International, West Conshohocken, PA, 2012.
- [17] ASTM D2492-02, "Standard Test Method For Sulfur In Coal", ASTM International, West Conshohocken, PA, 2002.
- [18] ASTM D2015-00, "Standard Test Method For Gross Calorific Value Of Coal And Coke By The Adiabatic Bomb Calorimeter", ASTM International, West Conshohocken, PA, 2000.
- [19] R. Pratama, Sufriadin, and S. Widodo, "Study Of Increasing The Calorific Value Of Coal Using Waste Cooking Oil", IOP Conf Ser Earth Environ Sci, vol. 1134, No. 1, pp. 78-82, Jan. 2023.
- [20] M. Irsyad, A. Amrizal, M.D. Susila, A. Amrul and T.M. Fransisco, "Heat Transfer Characteristics Of Coconut Oil As Phase Change Materials In Freezing Process", International Journal on Technical and Physical Problems of Engineering, Vol. 14, No. 1, pp. 29-33, 2022.
- [21] A. Aladin, "Empirical Modelling of Coal Desulphurisation by Flotation with Rayleigh Method", Journal of Chemical Process Engineering, Vol. 5, No. 1, pp. 45-53, 2020.
- [22] A. Aladin, "Determination of the Optimum Ratio of CPO: Coal in Desulphurisation and Deashing by Continuous Flotation System", Journal of Process Engineering, Vol. 3, No. 2, pp. 50-56, 2009.
- [23] N. M. N. W. H. H. Agung, "Relationship between total sulphur content and gross calorific value of coal PT. Carsurin Samarinda", Journal of Mineral Technology, Vol. 7, No. 1, pp. 1-8, 2019.

BIOGRAPHIES



Name: Nurliah
Surname: Jafar
Birthday: 29.09.1984
Birthplace: Barru, Indonesia
Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2008

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2014

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2009

Research Interests: Exploration mining

Scientific Publications: 38 Research

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Muhammad

Middle Name: Idris

Surname: Juradi

Birthday: 12.02.1992

Birthplace: Malili, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 2014

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2017

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2016

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 22 Papers, 4 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: Suriyanto

Surname: Bakri

Birthday: 19.11.1986

Birthplace: Sidrap, Indonesia

Bachelor: Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, 2009

Master: Mineral And Metallurgical Engineering, Mining Engineering Department, Faculty Of Mining And Petroleum Engineering, Bandung Institute of Technology, Bandung, Indonesia, 2018

The Last Scientific Position: Lecturer (Master), Department of Mining Engineering, Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2018

Research Interests: Mining Environment, Minerals Processing, Field 3

Scientific Publications: 29 Papers, 3 Research Project

Scientific Memberships: Indonesia Engineering Association, Indonesia Lecturer Association, Young Engineers Forum Indonesia Engineering Association, Association Of Mining Experts Indonesia



Name: **Lamatinulu**

Surname: **Lamatinulu**

Birthday: 08.06.1969

Birthplace: Palopo, Indonesia

Bachelor: Industrial Engineering and Management, Industrial Engineering Department, Faculty of Industrial

Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Master: Industrial Management, Department of Industrial Engineering, Faculty of Industrial Technology, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia, 2002
Technology, Muslim of Indonesia University, Makassar, Indonesia, 1994

Doctorate: Manufacturing Industrial Engineering, Mechanical Engineering Department, Faculty of Engineering, Brawijaya University, Malang, Indonesia, 2018

The Last Scientific Position: Prof., Department of Engineering Faculty of Industrial Technology, Muslim of Indonesia University, Makassar, Indonesia, Since 2007

Research Interests: Operation Research, Performance Measurement, Product Development, Production Planning and Control

Scientific Publications: 30 Papers, 3 Books, 7 Copyrights, 5 Research Projects

Scientific Memberships: Indonesian Engineers Association, Indonesian Lecturer Association

9. Bukti konfirmasi manuscript accepted (13 Februari 2024)



Int Journal of IJTPE (IOTPE) <ijtp0@...>

Tue, Feb 13, 6:21 PM



to me ▾

Dear Author,

The submitted paper will be reserved for the journal issue at the End of SEPTEMBER 2024, after final review and receiving signed copyright form and also receipt of journal fee (Paper Processing Charge).

The Journal Editorial Board has the right to change the publishing schedule of the accepted paper(s) in the earlier or later issue(s) of the journal based on the publishing planning and limitations.

1. Please print out and sign the attached Copyright Form by hand and send the scanned file back to us.

Do not forget to fill in the name and surname of the corresponding author as well as the information of the extended paper published before in another conference or journal.

Digital signature used in the copyright form is not accepted.

2. The indexing databases may index the published papers according to their methods and schedules and the IJTPE Journal does not control the indexing processes of the published papers on the indexing databases. Therefore, the Author(s) has(ve) not any right to claim in this regard.

- The reviewed and accepted papers are just published in the IJTPE Journal according to the Author(s)' submission, request and transferring the Journal Fee.

- The Journal Editorial Board has the right to change the publishing schedule of the accepted paper(s) in the earlier or later issue(s) of the journal based on the publishing planning and limitations.

- The Journal Editorial Board has the right to change the title and contents of the accepted paper(s) before/after the publishing process based on its rules and strategies.

- Violation of any part of the Agreement by the Author(s) will cause the publication of the submitted paper in the IJTPE Journal to be CANCELLED.

3. Please also transfer the Journal Fee (Paper Processing Charge) and send the receipt.

<http://www.iotpe.com/IJTPE/JournalFees.html>

- The **Journal Fee** is considered by the Editorial Board to cover the communication, reviewing, editing and publication processes of the submitted papers and **it is not refundable**.

- The author(s) has(ve) no claim to refund the Journal Fee after transferring.

- The author(s) **agree** to consider any **extra payment** during the Journal Fee transactions as the **Grant** to the journal process, because returning the extra payment is more expensive.

The journal fee (**350 Euro**, *excluding transaction Transfer expenses*) is transferred to the following bank account and the receipt of transaction is also submitted:

Bank: OJSC "XALQ" Bank, Baku, Azerbaijan

Beneficiary Name: Ramiz Aziz Iskandarov

Beneficiary TIN: 1007622462

IBAN: AZ25HAJCSCEUR10010092177001

SWIFT/BIC: HAJCAZ22

4. The author(s) can also transfer the journal fee just via online service such as **WISE / REVOLUT** Money Transfer (*about 20 Euro is the expense of transactions in WISE method*).

10. Bukti konfirmasi manuscript published online (27 September 2024)



Int Journal of IJTPE (IOTPE)

Fri, Sep 27, 6:09 PM (12 days ago)



to bcc: me ▾

27.09.2024

International Journal on "Technical and Physical Problems of Engineering" (IJTPE)

IJTPE - Issue 60, Volume 16, Number 3, September 2024 (Serial No: 0060-1603-0924)

Dear Author(s),

Please kindly find your accepted and published paper in International Journal on "Technical and Physical Problems of Engineering" (IJTPE) (www.iotpe.com) via the following links:

<https://www.iotpe.com/IJTPE/IJTPE-2024/IJTPE-2024.html>

IJTPE - Issue 60, Volume 16, Number 3, September 2024 (Serial No: 0060-1603-0924)

International Journal of IJTPE is a multidisciplinary peer-reviewed journal published quarterly and electronically by International Organization on "Technical and Physical Problems of Engineering" (IOTPE) that is dedicated to promoting research in theoretical themes, physical subjects and technical problems of Science, Technology and Engineering.

The IJTPE Journal is registered, cited and indexed in some scientific organization and databases such as [Elsevier-Scopus](#) considering the following link:

<http://www.iotpe.com/IJTPE/JournalCitations.html>

Warmest regards,