



Classification of Good and Damaged Rice using Convolutional Neural Network.docx

Feb 17, 2022

3409 words / 18605 characters

dolly_ Indra_DI

Classification of Good and Damaged Rice using Convolutional ...

Sources Overview

7%

OVERALL SIMILARITY

1	ojs.bilpublishing.com	1%
	INTERNET	
2	beei.org	<1%
	INTERNET	
3	ijedr.org	<1%
	INTERNET	
4	ijai.iaescore.com	<1%
	INTERNET	
5	coek.info	<1%
	INTERNET	
6	repository.unika.ac.id	<1%
	INTERNET	
7	97936afd-a902-4805-8793-483d5deaa180.filesusr.com	<1%
	INTERNET	
8	ijeecs.iaescore.com	<1%
	INTERNET	
9	journal.portalgaruda.org	<1%
	INTERNET	
10	s3.amazonaws.com	<1%
	INTERNET	
11	eprints.utm.my	<1%
	INTERNET	
12	www.beei.org	<1%
	INTERNET	

Excluded search repositories:

- Submitted Works
- Crossref
- Crossref Posted Content

Excluded from document:

- Bibliography
- Small Matches (less than 10 words)

Excluded sources:

None

Classification of Good and Damaged Rice using Convolutional Neural Network

Dolly Indra¹, Hadyan Mardhi Fadlillah², Kasman³, Lutfi Budi Ilmawan⁴, Harlinda Lahuddin⁵

¹Department of Information System, Universitas Muslim Indonesia, Makassar, Indonesia

²Department of Information System, Gunadarma University, Indonesia

³Department of Electrical Engineering, Universitas Muslim Indonesia, Makassar, Indonesia

⁴Department of Informatics Engineering, Universitas Muslim Indonesia, Makassar, Indonesia

⁵Department of Information System, Universitas Muslim Indonesia, Makassar, Indonesia

Article Info

Article history:

Received month dd, yyyy

Revised month dd, yyyy

Accepted month dd, yyyy

Keywords:

Rice

Classification

Channel V

GLCM

Convolutional Neural Network

ABSTRACT

Rice production is massive in Indonesia, therefore maintaining the quality of the product is necessary. We performed object detection namely rice. After the object is found, it can be classified into two categories, namely good and damaged rice. We conducted a new study on rice which was carried out per group not per grain to obtain or classify good and damaged rice where we had carried out several steps, namely segmentation process using HSV color space. HSV is used because of its excellence in representing brightness of the image. We considered evaluating brightness because the tendency of damaged rice is darker or more pale compared to good rice. To accomodate environment lighting ambiguity we perform the image acquisition in a controlled environment, so that all the images have the same light intensity. Here we use only channel V of HSV to be used in feature extraction using the Gray-Level Co-occurrence matrix (GLCM) and finally Convolutional Neural Network (CNN) is used for classification. From the test experiments that we have done, we have produced 83% prediction accuracy. Considering how similar the good rice is to the spoiled rice, the results are quite impressive.

⁴This is an open access article under the [CC BY-SA](#) license.



Corresponding Author:

Dolly Indra

¹Department of Information System

Universitas Muslim Indonesia

Makassar, Indonesia

Email: dolly.indra@umi.ac.id

1. INTRODUCTION

Rice was a staple food for most Indonesian people. Rice consumption in Indonesia was increasing every year in line with the increasing population of Indonesia [1]. Image processing is used for better interpretation of images by humans [2] and for analysis, data storage and transfer [3] which is an important research area within the Engineering and Computing discipline [4]-[5].

Object detection has become a very important part in image processing. The object detection system functions to find objects in the real world by utilizing the object model [6]. Object detection involves several main elements such as data sets, algorithms and techniques in assigning classes [7]. Several studies have carried out object detection such as object detection using image processing for unmanned aerial vehicles (UAV) [8], object detection using deep learning [9], object detection using color image processing [10], automatic car plate recognition using CNN [11]-[12], detection for vehicle make and model recognition (MMR) in low light conditions image processing for human skin detection [13]. After the object is found, it can then be classified into certain categories. Several studies have carried out classifications such as object color classification

Journal homepage: <http://beei.org>

through the Delta robot [14], image classification and object detection [15], strawberry fruit ripeness identification [16], classification of batik patterns using KNN and SVM [17].

In this paper, we conducted a new study on rice that was carried out per group not per grain to obtain or classify good and damaged rice where we have done some steps i.e., for the segmentation process using the HSV color space, feature extraction using Gray-Level Co-occurrence matrix (GLCM) while for classification using Convolutional Neural Network (CNN). We use only the channel V of HSV (hue, saturation, value) which is representing brightness of the image. Brightness of the image is evaluated because damaged rice tend to have darker or more pale in term of brightness compared to good rice.

2. METHOD

The detection model of good and damaged rice is shown in Figure 1 that consist of image input and then image processing is carried out. In image processing performed several steps while for object detection process by a feature search first, then the rice objects found then will be classified, namely good and damaged rice.

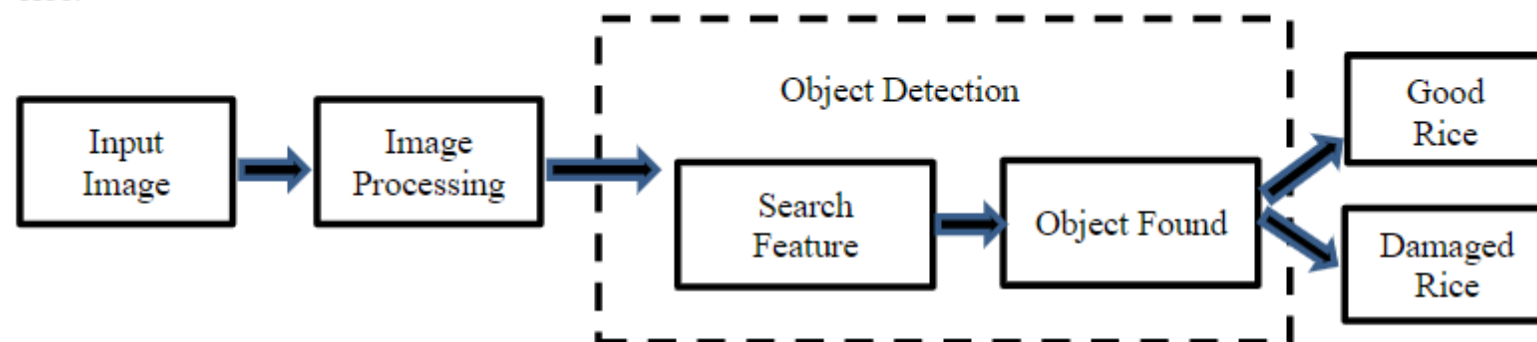


Figure 1. Object Detection Model for Good and Damaged Rice

2.1. Input rice image

RGB color space is composed of red, green, and blue spectrum components [18]. The input image of rice were 73 images with format RGB that consist of 25 images of good rice while 48 images of damaged rice. We used the image as a dataset. The image of good rice was rice that is whole rice or rice with a minimum size of more than 50% of its original size while the image of damaged rice was black rice or rice with a size of less than 50% of its original size or a combination of good and damaged rice in rice group. Examples of good and damaged rice are shown in Figure 2.

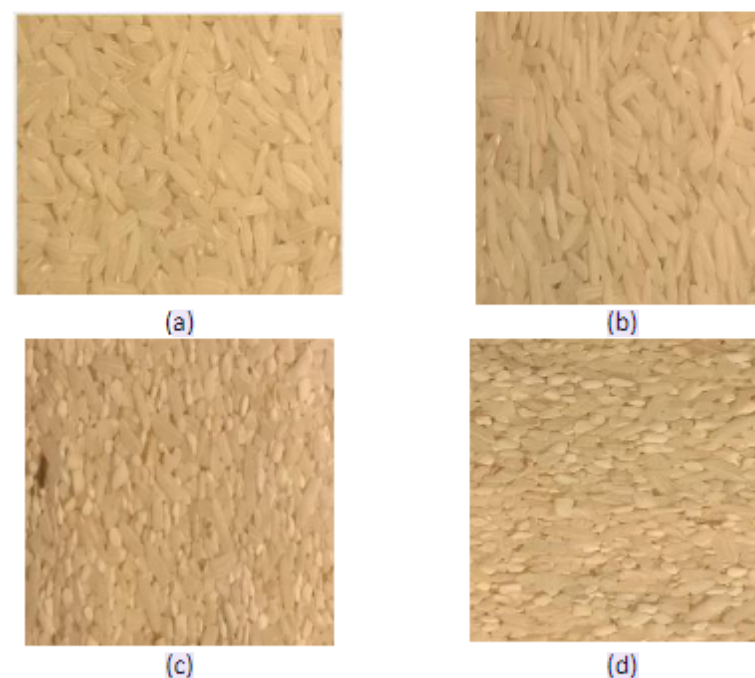


Figure 2. Image of good (a,b) and damaged (c,d) rice in RGB format

2.2. Preprocessing

At this stage we do the cropping process from the image taken from the webcam in a controlled environment to a size of 500x500 pixels.

2.3. Segmentation

The color segmentation stage is the process of separating areas in an image based on the colors contained in the image [19]. Segmentation begins with the conversion of RGB images into the HSV (Hue, Saturation and Value) color space [20], then the HSV image extracted only for channel V. This is performed because of the characteristic of the damaged rice which is darker and more pale compared to the good rice. Damaged rice also often have more texture because of the broken grain or not whole anymore.



Figure 3. Comparison Between RGB (left) and Channel V of HSV (right) Color Space

From the Figure 3 we can see that channel V performed better to represent brightness and texture of the image as it is more apparent.

2.4. Feature Extraction

The next step is to extract feature from the channel V image. The feature extraction stage is used to obtain information from images for classification [21]. The method used in this study is a texture classification method [22]-[26]. We use gray level co-occurrence matrix (GLCM) to extract the texture feature. In this GLCM method, first we convert all the pixel values to the gray scale intensity which have 8 level of intensities, after that, we count how often a pixel with gray level value i appears horizontally adjacent to a pixel with value j , where i and j value is range from 1 to 8. the result of the calculation then represented in a form of GLCM matrix, the illustration of the calculation and the GLCM matrix can be seen in Figure 4.

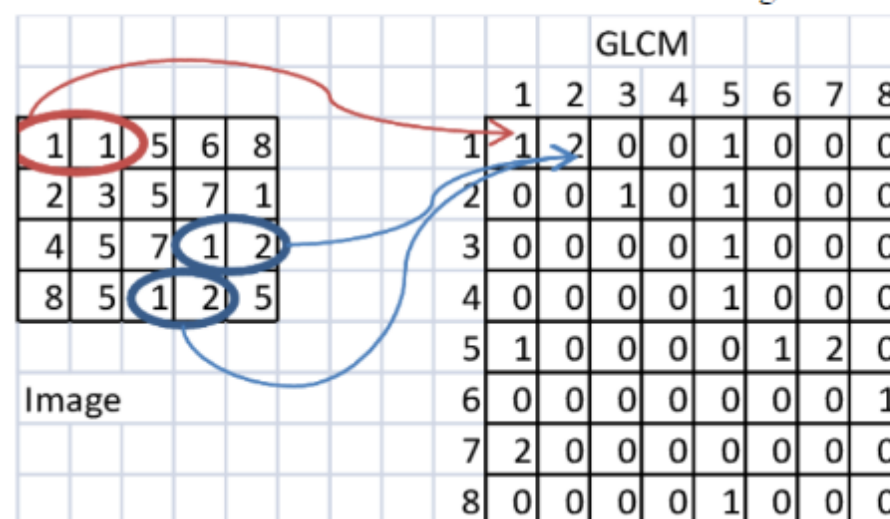


Figure 4. GLCM calculation

2.5. Classification

Convolutional Neural Network (CNN) is a type of neural network commonly used in image data and is included in the supervised deep learning method [27]-[28]. Convolutional Neural Network is a class of deep, feed-forward artificial neural network [29]-[30].

We use GLCM information as the CNN feature. The size of matrix that we use for GLCM operation is 8x8. We then reshape the matrix so that it become only one row. The final form of the matrix size is then become 1x64.

We use 5 layers for the CNN, the first layer is the input layer, then continue with 3 hidden layers, and end with output layer. For the input layer we use 64 features as the input, this is because we use 8x8 GLCM matrix which then transformed into 1x64 matrix, so the final result is 64 features. For the first hidden layer we expand the neurons to get more detail of the features, 192 neurons are used in this stage using ReLU (Rectified Linear Unit). For the second hidden layer we shrink the neurons become 64 number of neurons, and the third hidden layer become 21 neurons. Finally, the output layer have 2 neurons as we only want to classify the data into 2 classes. Implemented CNN network shown in Figure 5.

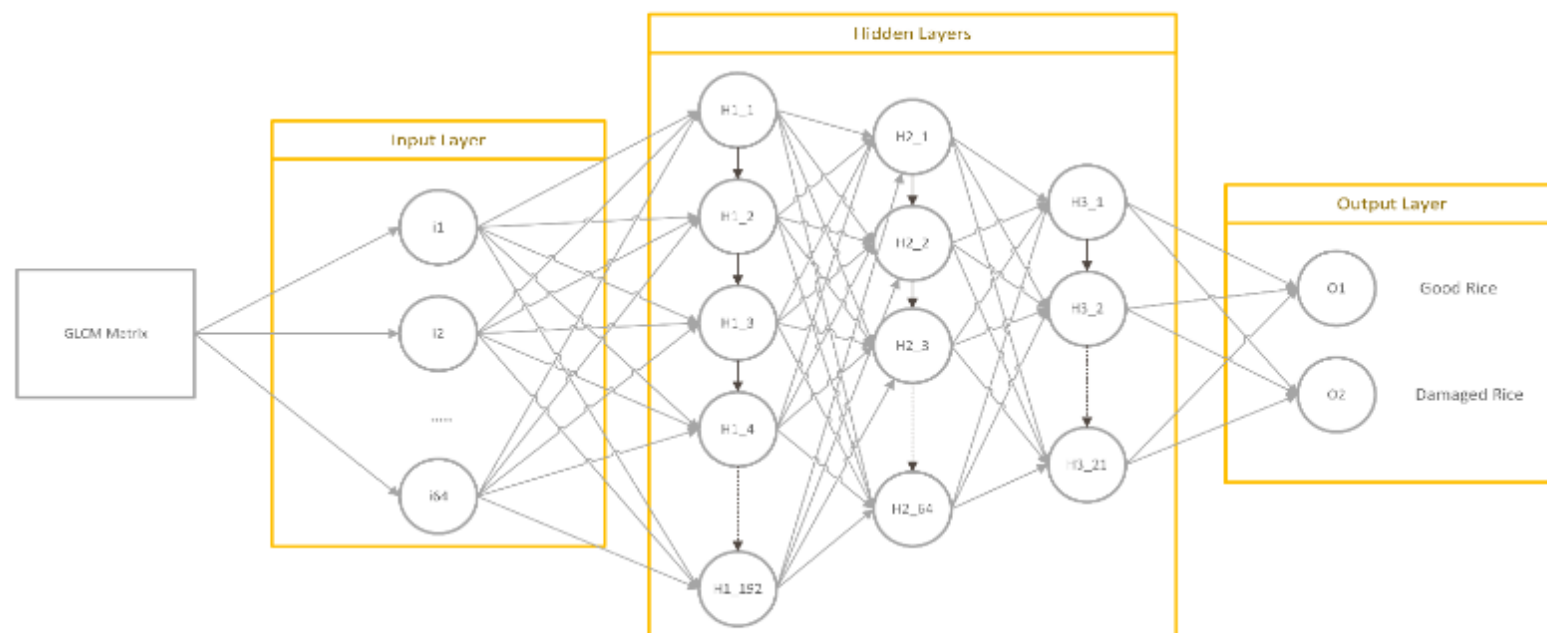


Figure 5. Implemented CNN Network

3. RESULTS AND DISCUSSION

73 images are used for the training purpose which consist of good rice and damaged rice images. Each training images are calculated for the GLCM matrix so that in the end we acquire 73x64 size of data ready to be trained. For the training purpose, we use 73 images consists of 25 images for good rice class and 48 images for damaged rice class. All images are captured with using a webcam with controlled environment. Training is processed in 75 epochs where the data order is randomized in each epoch. The process is split into mini batches where each batch consists of 16 data, the process then run in per batch. Training progress result shown in Figure 6.

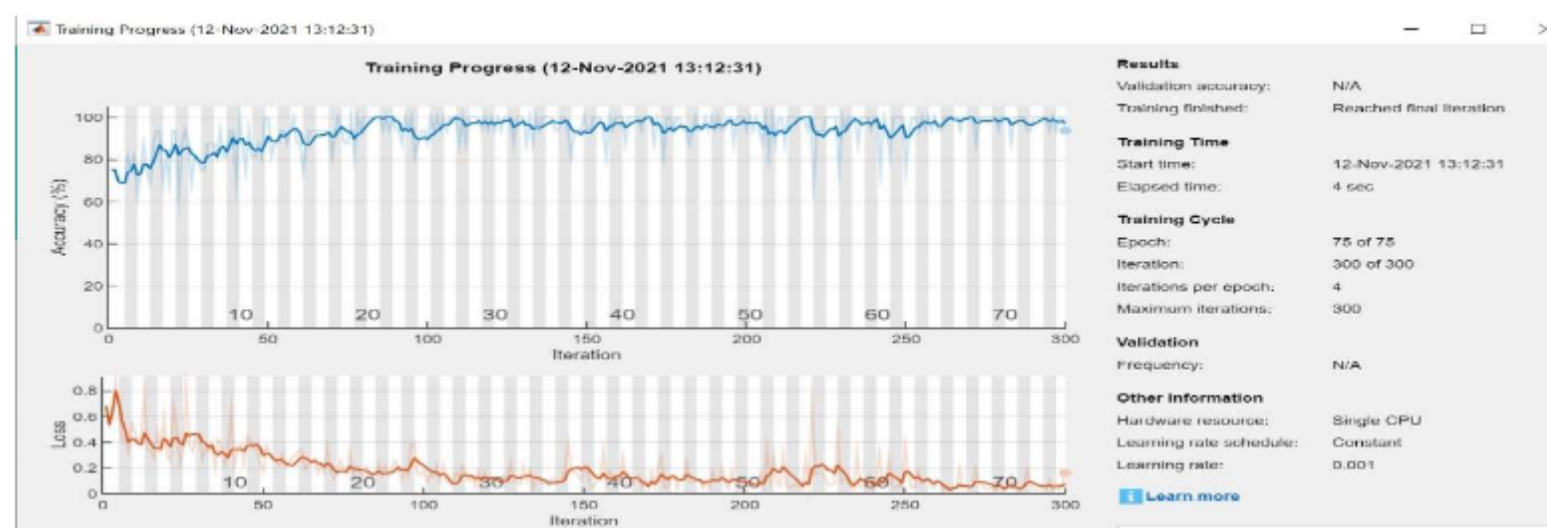


Figure 6. Training Progress Result

With this training setup we achieve minimum loss at the final iteration, with this result we can conclude that the network that we built is considered good and can be used for the classification or testing stage. The training algorithm can be seen in Figure 7.


```

imds = read_image_folder
class = label(imds)
train_im = []
for i = 1 to size(imds)
    img = readImage(imds(i))
    im_hsv = rgb2hsv(img)
    im_v = im_hsv(3) % take the third layer (v)
    im_gray = uint8(255*mat2gray(im_v)) % pixel normalization
    glcms = graycomatrix(im_gray) % 8x8 glcm matrix
    glcm = reshape(glcms,1,[]) % reshape to 1x64 glcm matrix
    train_im = [train_im ; glcm]
end
layers = [
    %input layer (64 Total Features)
    featureInputLayer(64)
    %hidden layer 1 (192 Neurons)
    fullyConnectedLayer(192)
    batchNormalizationLayer
    reluLayer
    %hidden layer 2 (64 Neurons)
    FullyConnectedLayer(64)
    batchNormalizationLayer
    reluLayer
    %hidden layer 3 (21 Neurons)
    fullyConnectedLayer(21)
    batchNormalizationLayer
    reluLayer
    %output neurons (2 classes)
    fullyConnectedLayer(2)
    softmaxLayer
    classificationLayer]
options = trainingOptions(...
    'adam', ... %Optimizer Function
    'MaxEpochs',75, ... %Training Cycle
    'MiniBatchSize',16, ... %Processed data per run
    'Shuffle','every-epoch', ... %Randomize data order every epoch
    )
net = trainNetwork(train_im,class,layers,options);

```

Figure 7. Training Algorithm

In testing stage, we use different images from the images we used in training. Each testing images are already labelled according to the class where they are belonging. The testing stage is implemented to test how accurate the program predicting the label or class of the testing images. The testing images are run through the same process as in the training stage, which is, preprocessing, segmentation and feature extraction. Testing result shown in Figure 8.

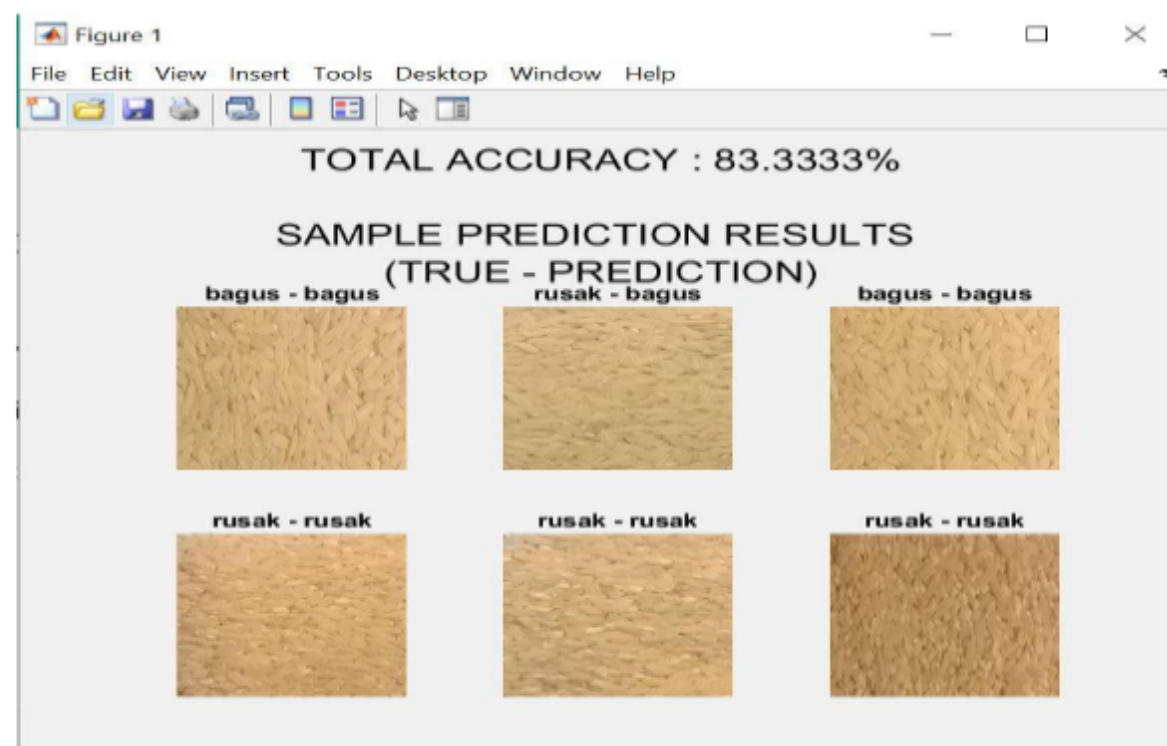


Figure 8. Testing Result

From the testing experiment we have done, we have yield 83% of prediction accuracy. Considering how similar it looks between the good and the damaged rice, the result is quite impressive. The testing algorithm can be seen in Figure 9.

```

net = CNN_Network
imds = read_image_folder
class = label(imds)
test_im = []
for i = 1 to size(imds)
    img = readImage(imds(i))
    im_hsv = rgb2hsv(img)
    im_v = im_hsv(3) % take the third layer (v)
    im_gray = uint8(255*mat2gray(im_v)) % pixel normalization
    glcms = graycomatrix(im_gray) % 8x8 glcm matrix
    glcm = reshape(glcms,1,[]) % reshape to 1x64 glcm matrix
    test_im = [test_im ; glcm]
end
YPred = classify(net,test_im)
YValidation = class
accuracy = sum(YPred == YValidation)/numel(YValidation)

```

Figure 9. Testing Algorithm

4. CONCLUSION

In this paper, we have carried out a classification for good and damaged rice. RGB to HSV image conversion is performed so that it is easier to get brightness information in HSV format. V channel from the HSV is the only channel we used as we only interested in the brightness and texture of the image. GLCM is used as the texture feature and finally a convolutional neural network is implemented to classify the testing data. From this study it is yield with a result of accuracy rate of 83%. It is noted that the result is achieved using the testing and training images which is acquired in the same environment setup.

In future work, we will continue our current research by focusing on identifying good and damage rice in real time using other methods. It is important to implement a new method to tackle the problem of ambiguity of environment lighting to perform better normalization of lighting, therefore image acquisition can be performed in a more flexible environment.

ACKNOWLEDGEMENTS

We would like to thank the Ministry of Research and Technology / BRIN for the financial assistance and LP2S UMI which have helped facilitate this research activity.

REFERENCES

- [1] A. Q. Pudjiastuti, G. M. K. Arisena, and A. A. K. Krisnandika, "Rice Import Development in Indonesia," *SOCA J. Sos. Ekon. Pertan.*, vol. 15, no. 2, pp. 387–402, 2021.
- [2] C. G. N. and S. Kulkarni, "Image processing using a reconfigurable platform: Pre-processing block hardware architecture," *Int. J. Reconfigurable Embed. Syst.*, vol. 10, no. 3, p. 230, 2021, doi: 10.11591/ijres.v10.i3.pp230-236.
- [3] E. A. Sekehravani, E. Babulak, and M. Masoodi, "Implementing canny edge detection algorithm for noisy image," *Bull. Electr. Eng. Informatics*, vol. 9, no. 4, pp. 1404–1410, 2020, doi: 10.11591/eei.v9i4.1837.
- [4] G. K. Ijamaru et al., "Image processing system using matlab-based analytics," *Bull. Electr. Eng. Informatics*, vol. 10, no. 5, pp. 2566–2577, 2021, doi: 10.11591/eei.v10i5.3160.
- [5] S. Kadry, V. Rajinikanth, J. Koo, and B. G. Kang, "Image multi-level-thresholding with Mayfly optimization," *Int. J. Electr. Comput. Eng.*, vol. 11, no. 6, pp. 5420–5429, 2021, doi: 10.11591/ijece.v11i6.pp5420-5429.
- [6] K. U. Sharma and N. V. Thakur, "A review and an approach for object detection in images," *Int. J. Comput. Vis. Robot.*, vol. 7, no. 1–2, pp. 196–237, 2017, doi: 10.1504/IJCVR.2017.081234.
- [7] U. Arshad, "Object Detection in Last Decade - A Survey," *Sci. J. Informatics*, vol. 8, no. 1, pp. 60–70, 2021, doi: 10.15294/sji.v8i1.28956.
- [8] F. Jalled and I. Voronkov, "Object Detection using Image Processing," pp. 1–6, 2016, [Online]. Available: <http://arxiv.org/abs/1611.07791>.
- [9] Z. Q. Zhao, P. Zheng, S. T. Xu, and X. Wu, "Object Detection with Deep Learning: A Review," *IEEE Trans. Neural Networks Learn. Syst.*, vol. 30, no. 11, pp. 3212–3232, 2019, doi: 10.1109/TNNLS.2018.2876865.
- [10] Y. Zhang and X. Li, "processing," pp. 974–978, 2011.
- [11] T. E. Liang, U. U. Sheikh, and M. N. H. Mohd, "Malaysian car plate localization using region-based convolutional neural network," *Bull. Electr. Eng. Informatics*, vol. 9, no. 1, pp. 411–419, 2020, doi: 10.11591/eei.v9i1.1862.
- [12] M. A. Uthaib and M. S. Croock, "Multiclassification of license plate based on deep convolution neural networks," *Int. J. Electr. Comput. Eng.*, vol. 11, no. 6, pp. 5266–5276, 2021, doi: 10.11591/ijece.v11i6.pp5266-5276.
- [13] A. F. Abbas, U. U. Sheikh, and M. N. H. Mohd, "Recognition of vehicle make and model in low light conditions," *Bull. Electr. Eng. Informatics*, vol. 9, no. 2, pp. 550–557, 2020, doi: 10.11591/eei.v9i2.1865.
- [14] J. Daniel Martinez Reyes, G. G. Badillo, V. E. E. Lopez, and G. G. Mora, "Objects color clasification and repositioning operated by a delta robot," *18th Congr. Mex. Robot. COMRob 2016*, no. November 2016, pp. 9–11, 2017, doi: 10.1109/COMROB.2016.7955157.
- [15] Z. Chen, J. Zhang, R. Ding, and D. Marculescu, "Image Classification and Object Detection," *ArXiv*, 2019, doi: 10.15354/si.19.re117.Author.
- [16] S. Anraeni, D. Indra, D. Adirahmadi, S. Pomalingo, Sugiarti, and S. H. Mansyur, "Strawberry Ripeness Identification Using Feature Extraction of RGB and K-Nearest Neighbor," *3rd 2021 East Indones. Conf. Comput. Inf. Technol. EIConCIT 2021*, pp. 395–398, 2021, doi: 10.1109/EIConCIT50028.2021.9431854.
- [17] A. E. Minarno, F. D. S. Sumadi, H. Wibowo, and Y. Munarko, "Classification of batik patterns using K-nearest neighbor and support vector machine," *Bull. Electr. Eng. Informatics*, vol. 9, no. 3, pp. 1260–1267, 2020, doi: 10.11591/eei.v9i3.1971.
- [18] E. R. Arboleda, C. L. T. de Jesus, and L. M. S. Tia, "Pineapple maturity classifier using image processing and fuzzy logic," *IAES Int. J. Artif. Intell.*, vol. 10, no. 4, pp. 830–838, 2021, doi: 10.11591/ijai.v10.i4.pp830-838.
- [19] D. Indra, Purnawansyah, S. Madenda, and E. P. Wibowo, "Indonesian sign language recognition based on shape of hand gesture," *Procedia Comput. Sci.*, vol. 161, pp. 74–81, 2019, doi: 10.1016/j.procs.2019.11.101.
- [20] H. A. Nugroho et al., "Segmentation of plasmodium using saturation channel of HSV color space," *2019 Int. Conf. Inf. Commun. Technol. ICOLACT 2019*, pp. 91–94, 2019, doi: 10.1109/ICOLACT46704.2019.8938471.
- [21] W. K. Mutlag, S. K. Ali, Z. M. Aydam, and B. H. Taher, "Feature Extraction Methods: A Review," *J. Phys. Conf. Ser.*, vol. 1591, no. 1, 2020, doi: 10.1088/1742-6596/1591/1/012028.
- [22] J. L. Raheja, S. Kumar, and A. Chaudhary, "Fabric defect detection based on GLCM and Gabor filter: A comparison," *Optik (Stuttg.)*, vol. 124, no. 23, pp. 6469–6474, 2013, doi: 10.1016/j.ijleo.2013.05.004.
- [23] P. Yang and G. Yang, "Feature extraction using dual-tree complex wavelet transform and gray level co-occurrence matrix," *Neurocomputing*, vol. 197, pp. 212–220, 2016, doi: 10.1016/j.neucom.2016.02.061.
- [24] L. Zhang, Z. Zhou, and H. Li, "Binary Gabor pattern: An efficient and robust descriptor for texture classification," *Proc. - Int. Conf. Image Process. ICIP*, pp. 81–84, 2012, doi: 10.1109/ICIP.2012.6466800.
- [25] N. M. Saad, A. R. Abdullah, W. H. W. Hasan, N. N. S. A. Rahman, N. H. Ali, and I. N. Abdullah, "Automated vision based defect detection using gray level co-occurrence matrix for beverage manufacturing industry," *IAES Int. J. Artif. Intell.*, vol. 10, no. 4, pp. 818–829, 2021, doi: 10.11591/ijai.v10.i4.pp818-829.
- [26] A. A. Fauzi, F. Utaminirum, and F. Ramdani, "Road surface classification based on LBP and GLCM features using KNN classifier," *Bull. Electr. Eng. Informatics*, vol. 9, no. 4, pp. 1446–1453, 2020, doi: 10.11591/eei.v9i4.2348.
- [27] W. Setiawan, M. I. Utoyo, and R. Rulaningtyas, "Reconfiguration layers of convolutional neural network for fundus patches classification," *Bull. Electr. Eng. Informatics*, vol. 10, no. 1, pp. 383–389, 2021, doi: 10.11591/eei.v10i1.1974.
- [28] O. M. Khanday, S. Dadvandipour, and M. A. Lone, "Effect of filter sizes on image classification in CNN: A case study on CFIR10 and fashion-MNIST datasets," *IAES Int. J. Artif. Intell.*, vol. 10, no. 4, pp. 872–878, 2021, doi: 10.11591/ijai.v10.i4.pp872-878.
- [29] R. L. Galvez, A. A. Bandala, E. P. Dadios, R. R. P. Vicerra, and J. M. Z. Maningo, "Object Detection Using Convolutional Neural Networks," *IEEE Reg. 10 Annu. Int. Conf. Proceedings/TENCON*, vol. 2018-Octob, no. May 2019, pp. 2023–2027,

Paper's should be the fewest possible that accurately describe ... (First Author)

- 2019, doi: 10.1109/TENCON.2018.8650517.
- [30] A. T. Radhi, W. H. Zayer, and A. M. Dakhil, "Classification and direction discrimination of faults in transmission lines using 1d convolutional neural networks," *Int. J. Power Electron. Drive Syst.*, vol. 12, no. 3, pp. 1928–1939, 2021, doi: 10.11591/ijpeds.v12.i3.pp1928-1939.

BIOGRAPHIES OF AUTHORS

	Dolly Indra    obtained his Doctoral degree from Gunadarma University in 2017. Currently, he is a lecturer at the Department of Information Systems, Faculty of Computer Science, Universitas Muslim Indonesia and also active as researcher. His current research interest is Image Processing, Computer Vision and Microcontroller. He can be contacted at Email: dolly.indra@umi.ac.id
	Hadyan Mardhi Fadlillah    received his bachelor degree in 2010 from Informatics Engineering Program in Gunadarma University, Indonesia. Received master degree in 2011 from Information System Software Program in Gunadarma University, and also master degree in 2012 from Computer Vision and Robotic Program, VIBOT, in University of Burgundy, France. Currently he is pursuing doctoral degree program of Informatics Engineering in Gunadarma. He is active as lecturer and researcher in Gunadarma University, Indonesia. His research interests include image processing, neural network, and decision support system application. Contact: hadyanfadlillah@staff.gunadarma.ac.id.
	Kasman    obtained his Master's degree from the Sepuluh Nopember Institute of Technology Surabaya in 2009. Currently, he is a lecturer at the Department of Electrical Engineering, Indonesian Muslim University, Makassar, Indonesia and is also active as a researcher. His current research interests are Multimedia intelligent networks and Microcontrollers. He can be contacted at Email: kasman@umi.ac.id
	Lutfi Budi Ilmawan    received the Bachelor degree in Computer Science from Universitas Muslim Indonesia in 2010. He received the Master of Computer Science degree from Gadjah Mada University in 2014. Currently, He is lecturer in Department of Informatics Engineering, Computer Science Faculty, Universitas Muslim Indonesia. He received the certificate of competence in the area of Software Development with qualification Programmer from BNSP in 2019, he also received the certificate of competence from Microsoft Technology Associate for Introduction to Programming using Python scheme in 2020. His research interest include sentiment analysis using multiple strategies such as feature engineering and missing value handling to gain higher accuracy. He can be contacted at lutfibudi.ilmawan@umi.ac.id
	Harlinda L    has Bachelor's degree in Information Management from University of Gunadarma (1993), Master's degree and Dr. degree in Management from Universitas Muslim Indonesia (Muslim University of Indonesia) in 2000 and 2018. She also has Master's degree in Information System from University of Gadjah Mada (2007). She is currently an Associate Professor of the Universitas Muslim Indonesia, working in the Department of Computer Science. She has experience in computer science, with emphasis on Information System. She can be contacted at email: harlinda@umi.ac.id